
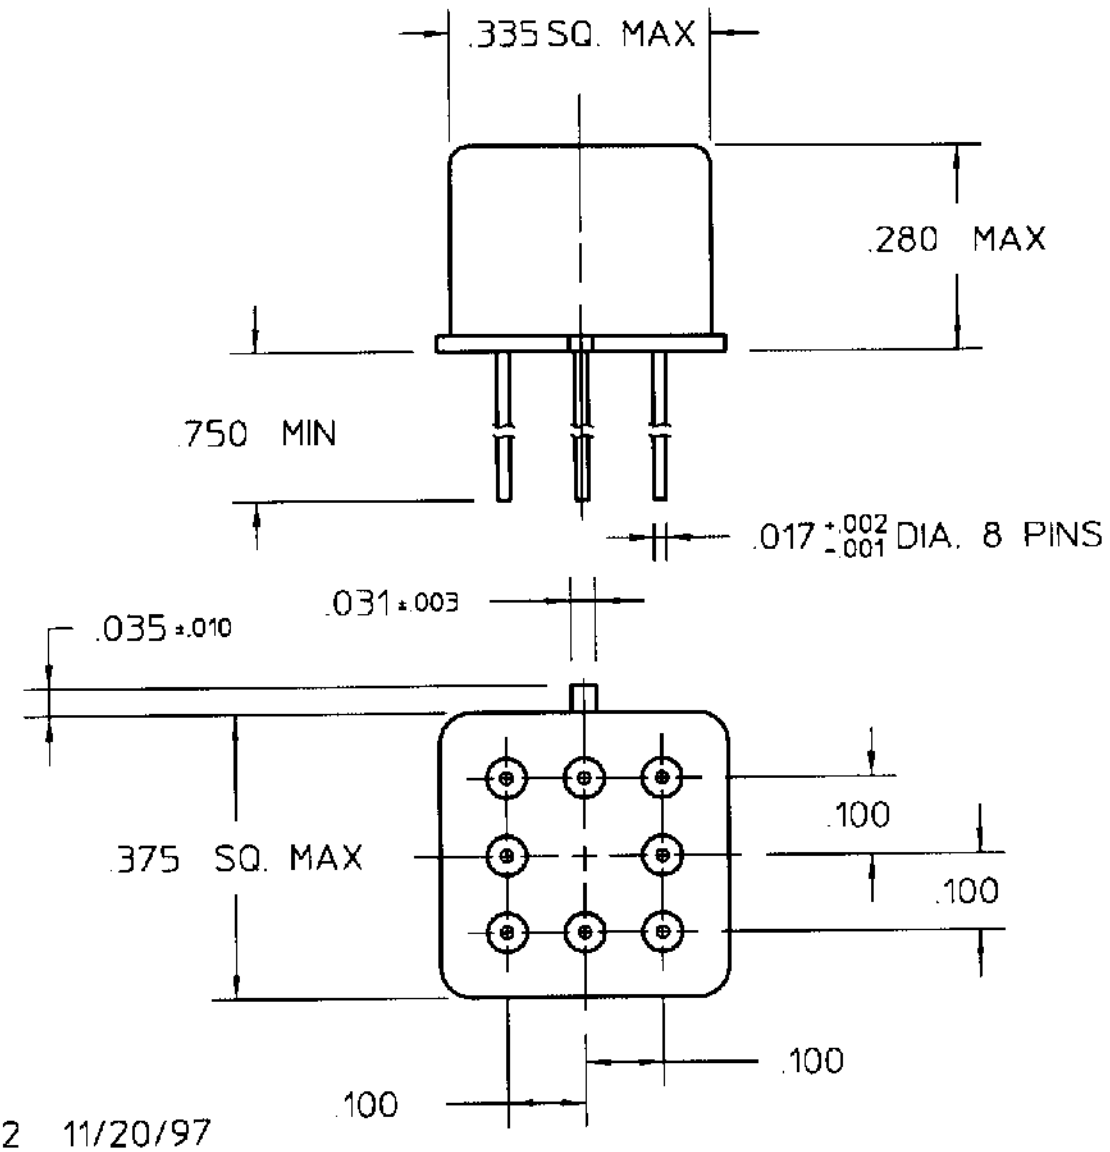


REV. 2 11/20/97

CUSTOMER DATA SHEET

COIL:

RESISTANCE	400 OHMS
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	8.4 VDC
MUST RELEASE	



ENVIRONMENT:

VIBRATION 10 CPS TO 500 CPS @ 10 g's

SHOCK 30 g's 6 MS. DURATION

TEMPERATURE -55 °C TO +85 °C

NOTES: OPERATE TIME 4.0 MS MAX.
RELEASE TIME 3.0 MS MAX.

CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS MIN.

DR. R.B. 9/7/90 CK 11/21/97

COMMUNICATIONS INSTRUMENTS, INC.

CUST. C.I.I. STD.
CUST. NO.

TYPE "HC" RELAY

HC-12B