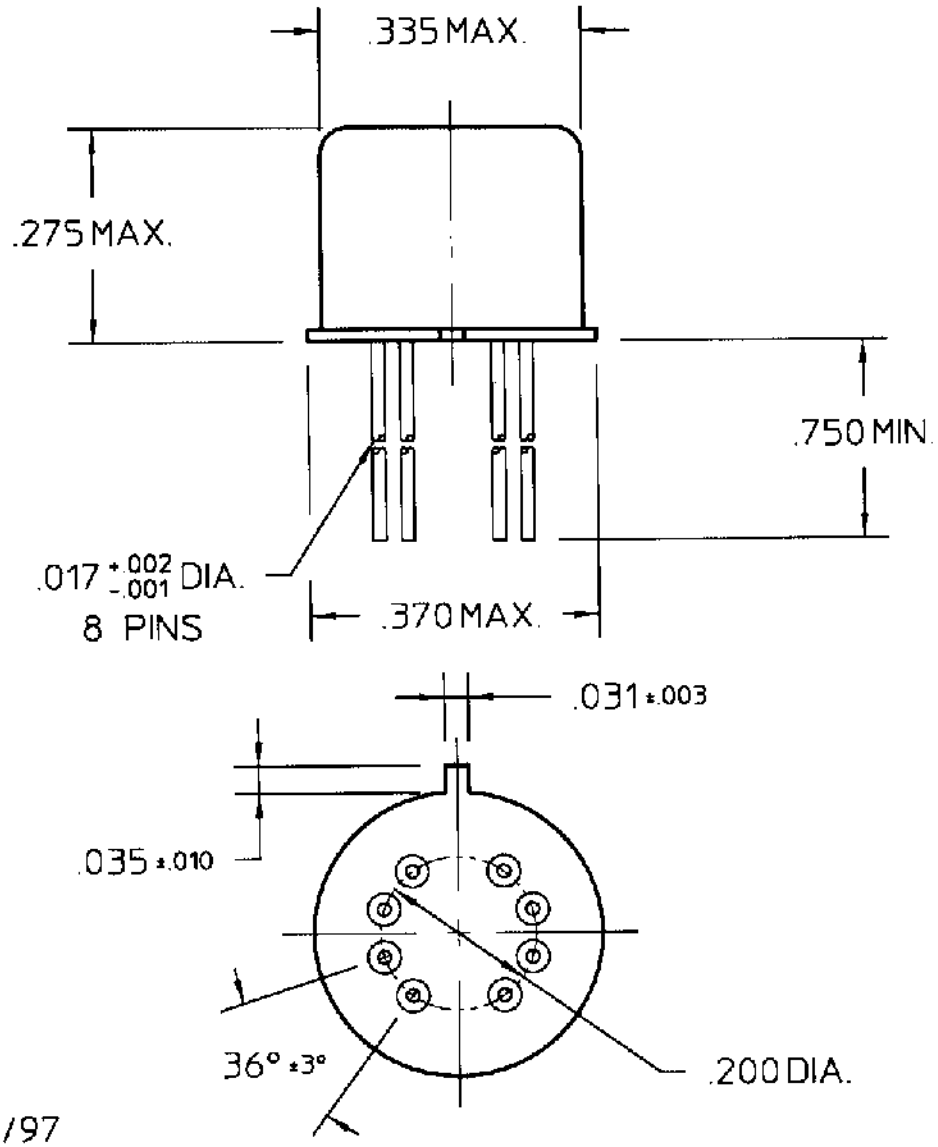


REV. 1 11/20/97

COIL: @ 25°C

RESISTANCE 50 OHMS ± 10%

NOMINAL VOLTAGE 5.0 VDC

MUST OPERATE 3.6 VDC

MUST RELEASE

ENVIRONMENT:

VIBRATION 10 CPS TO 500 CPS @ 10 g's

SHOCK 30 g's 6 MS. DURATION

TEMPERATURE -55 °C TO +85 °C


NOTES: OPERATE TIME 4.0 MS MAX.
RELEASE TIME 3.0 MS MAX.

CUST. C. I. I. STD.

CUST. NO.

TYPE "HM" RELAY

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 10/29/97 11/21/97

COMMUNICATIONS INSTRUMENTS, INC.

HM-5B