
© 2024 TE Connectivity. All Rights Reserved.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	ECN-24-268451 TE STANDARD	30MAY2024	KS	RB

EC No.


Battery Disconnector 2x200A


Page 1 of 1

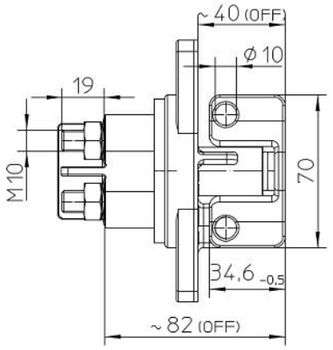

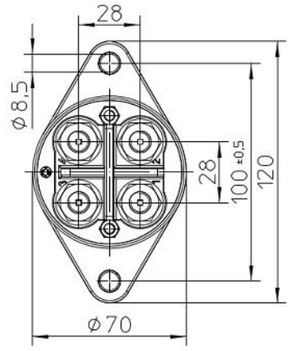

Circuit





For this drawing we reserve the copyright in accordance with DIN ISO 16016

Technical Data:

Case Material	PA GF black
Switch Lever Material	PA GF red
Min.Insulation Resistance	100MOhm
Dielectric Withstanding Voltage	1050V-1min.
Max.Contact Drop during Resistive Load	150mV
Voltage	up to 32VDC
Duty Rating	2x 200A
Overload	2x 500A-180sec.
	2x 1000A-30sec.
Sealing	IP 67/ IEC 529
Vibration	4G/ 50-2000Hz
Shock G-Lever	6G/ 11ms
Weight	~380g / 0.83 pound
Temperature Range	-40°C to +85°C
Wire Section (At Nominal Load)	min. 70mm2
Mounting Position	optional
Switch Lever	not removeable
Torque (Main Terminals)	15-20Nm

	Date	Name
Create	03.03.2014	Seege
Edited	11.06.2019	Seege
Check	16.08.2019	Grind

mm — General Tolerances

Scale 1:2

KUHNE


Drawing No: 35-224-131-R-900

NSN.:

NOTE
Bemerkungen:

1 TE-CONNECTIVITY ORDER-NUMBER
TE-Connectivity Bestellnummer

2 DO NOT SWITCH UNDER LOAD!
Nicht unter Last schalten!

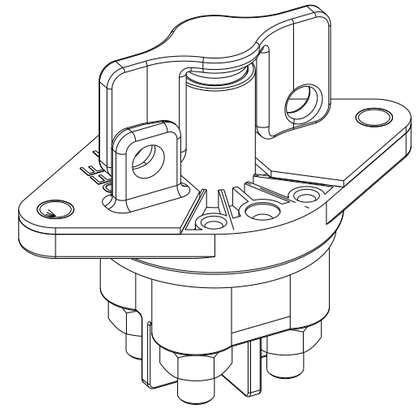

1	K1150350	A	BATTERY DISCONNECTOR 2X200A Batterietrennschalter 2X200A	1
	TE ORDER-NO.	REV.	DESCRIPTION	ITEM NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: DIN ISO 2768 cL

0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±

MATERIAL

FINISH

DWN	K.Seeger 03MAR2014
CHK	K.Seeger 11JUN2019
APVD	U.Grindemann 16AUG2019
PRODUCT SPEC	
APPLICATION SPEC	
WEIGHT	

TE Connectivity

NAME
BATTERY DISCONNECTOR 2X200A
Batterietrennschalter 2X200A

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-35-224-131-R-900	-

CUSTOMER DRAWING

SCALE

SHEET 1 OF 1

REV A