EV-T2M3SO12-4P-BL-SET - Infrastructure charging socket

1268355

https://www.phoenixcontact.com/us/products/1268355

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



CHARX connect modular, Type 2, Infrastructure charging socket, 32 A , 480 V AC, Basic, Set, without single-core wires, locking actuator: 12 V, 4-pos., square, Rear panel mounting, M5 thread, housing: black, with square protective cover, with LED (common cathode connection), for charging electric vehicles (EV) with alternating current (AC), PHOENIX CONTACT logo, IEC 62196-2

Product description

Infrastructure charging sockets with protective cover, for charging electric vehicles (EV) with alternating current (AC), compatible with Type 2 Infrastructure Plugs. For installation at charging stations for E-Mobility (EVSE)

Your advantages

- Charging status intuitively visible at a glance with color LED indicator
- Protected against overheating with precise temperature measurement
- Flexible mounting and easy maintenance with plug-in cables
- Available with your logo on request - for consistent branding of your charging station
- Waterproof and dirtproof due to fully molded contacts
- Developed and produced in accordance with the IATF 16949 automotive standard and ISO 9001
- Uniform, space-saving installation space

Commercial data

Item number	1268355
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	EM01
Product key	XWBFLD
GTIN	4063151419080
Weight per piece (including packing)	579 g
Weight per piece (excluding packing)	528 g
Customs tariff number	85366990
Country of origin	DE

EV-T2M3SO12-4P-BL-SET - Infrastructure charging socket

1268355

https://www.phoenixcontact.com/us/products/1268355

Set consists of

EV-T2M3SO12-4P-B - Infrastructure charging socket

1164300

https://www.phoenixcontact.com/us/products/1164300



CHARX connect modular, Type 2, Infrastructure charging socket, 32 A , 480 V AC, Basic, without single-core wires, locking actuator: 12 V, 4-pos., square, Rear panel mounting, M5 thread, housing: black, for charging electric vehicles (EV) with alternating current (AC), PHOENIX CONTACT logo, IEC 62196-2

EV-T2SOC-P - Protective cover

1164297

https://www.phoenixcontact.com/us/products/1164297



CHARX connect modular, Type 2, Protective cover, Accessories, Premium, square, Front mounting, M5 thread, with self-locking mechanism, with LED (common cathode connection), for attaching to infrastructure charging sockets, Embossed PHOENIX CONTACT logo, IEC 62196-2

EV-T2M3SO-CAP - Protective cap

1202424

https://www.phoenixcontact.com/us/products/1202424



CHARX connect modular, Type 2, Protective cap, Accessories, circular, for strain relief and touch protection, IEC 62196-2

Technical data

Product properties

Product type	Infrastructure charging socket
Product family	CHARX connect modular
Application	for charging electric vehicles (EV) with alternating current (AC)
	compatible with infrastructure charging plugs
Design (Infrastructure charging socket)	square
Design (Protective cover)	square
Design (Protective cap)	circular
Design	with square protective cover
	with LED (common cathode connection)
Compatibility	The square basic protective cover version included in this set is not compatible with the shutter. Choose a set with a premium and/or round protective cover version for this.
Charging standard	Type 2
Charging mode	Mode 3, Case B
Affixed logo	PHOENIX CONTACT logo
Customer variations	On request

Electrical properties

LED function

Application	to display the charging status
Position	in the frame of the protective cover
Connection type	common cathode

Charging power and current (AC charging (3-phase))

Type of charging current	AC 3-phase
Charging current	max. 32 A AC (3-phase)
Charging power	max. 26.6 kW (3-phase)
Charging power rating	max. 22 kW (32 A, 3-phase)
Rated voltage	480 V

Pin assignment (Leistungskontakte)

Note on the connection method	Connection via spade connector, separable and reconnectable
Number	5 (L1, L2, L3, N, PE)
Rated voltage	480 V AC
Rated current	max. 32 A (The infrastructure charging socket is designed for both 1-phase and 3-phase charging with charging currents of up to 32 A.)

Pin assignment (Signalkontakte)

Note on the connection method	Connection via spade connector, separable and reconnectable
Type of signal transmission	Pulse width modulation
Number	2 (CP, PP)

Rated voltage	30 V AC
Rated current	2 A

Locking actuator

Locking actuator	12 V, 4-pos.
	Top center position
Possible power supply range at the motor	9 V ... 16 V
Maximum voltage for locking detection	30 V
Typical motor current for locking	0.2 A
Reverse current of the motor	max. 1 A
Max. dwell time with reverse current	1000 ms
Recommended adaptation time	600 ms
Pause time after entry or exit path	3 s
Service life insertion cycles	> 10000 load cycles
Lock recognition	available
Mechanical emergency release	available
Ambient temperature (operation)	-30 °C ... 50 °C
Cable length	0.5 m
Cable structure	4 x 0.5 mm²

Dimensions

Bore dimensions

Width	60 mm
Height	60 mm

Infrastructure charging socket


Width	75 mm
Height	91.71 mm
Depth	87.95 mm (with protective cap for strain relief and touch protection attached at the back, included in delivery and already mounted)
	73.35 mm (without protective cap for strain relief and touch protection attached at the back, removal tool see accessories)

Protective cover

Width	84.9 mm
Height	93.7 mm
Depth	30.5 mm

Protective cap

Width	64 mm
Height	57 mm
Depth	24 mm

Dimensional drawing	
Max. wall thickness	max. 50.00 mm (Rear panel mounting, normative maximum specification for infrastructure plug)
	max. 29.00 mm (Rear panel mounting, normative maximum specification for infrastructure charging plug when using protective cover 1164297)

Material specifications

Color (Housing)	black (9005)
Color (Protective cover)	black (9005)
Material (Housing)	Plastic
Material (Protective cover)	Plastic
Material (Contact surface)	Silver

Cable/line

Cable type	without single-core wires
	Single-core wires for AC and communication are available separately, see accessories

Single-core wires for locking actuator

Cable length	0.5 m
Cable structure	4 x 0.5 mm²
Single wire, material	PVC
Single wire, color	BU/RD, BU/GN, BU/YE, BU/BN
External cable diameter	1.60 mm ±0.20 mm
Cable resistance	≤ 37.1 Ω/m

Mechanical properties

Type of cover movement	Self-locking

Mechanical data

Insertion/withdrawal cycles	> 10000
Insertion force	< 100 N
Withdrawal force	< 100 N

Environmental and real-life conditions

Ambient conditions

Degree of protection (Infrastructure charging socket)	IP44 (plugged in)
Degree of protection (Protective cover)	IP54
Ambient temperature (operation)	-30 °C ... 50 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C

Altitude	5000 m (above sea level)

Standards and regulations

Standards


Standards/regulations	IEC 62196-2

Mounting


Mounting type Infrastructure charging socket	Rear panel mounting (0 to 90 degree frontal inclination possible)
Mounting type Protective cover	Rear panel mounting
Mounting hole diameter	7.00 mm (ø)
Fixing screws	M5 thread
Screws included in the scope of delivery	none

Drawings


Dimensional drawing

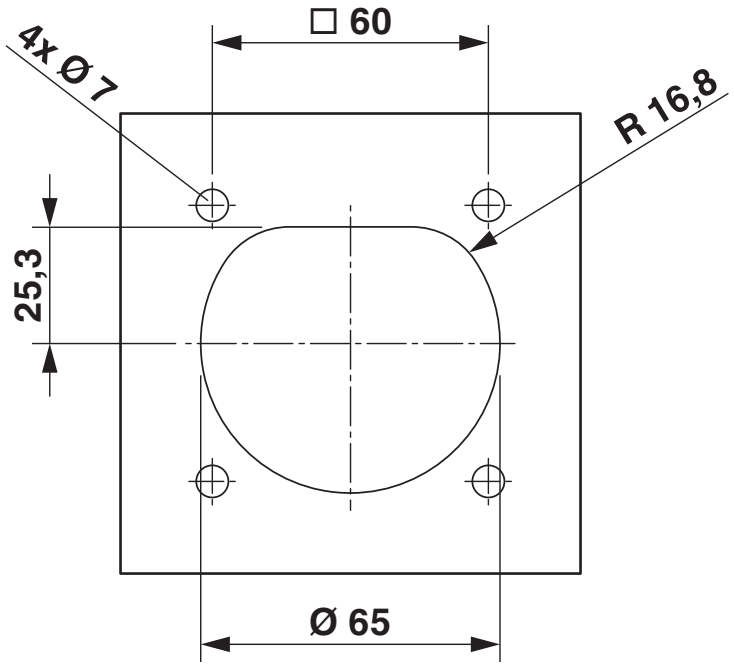


Dimensional drawing

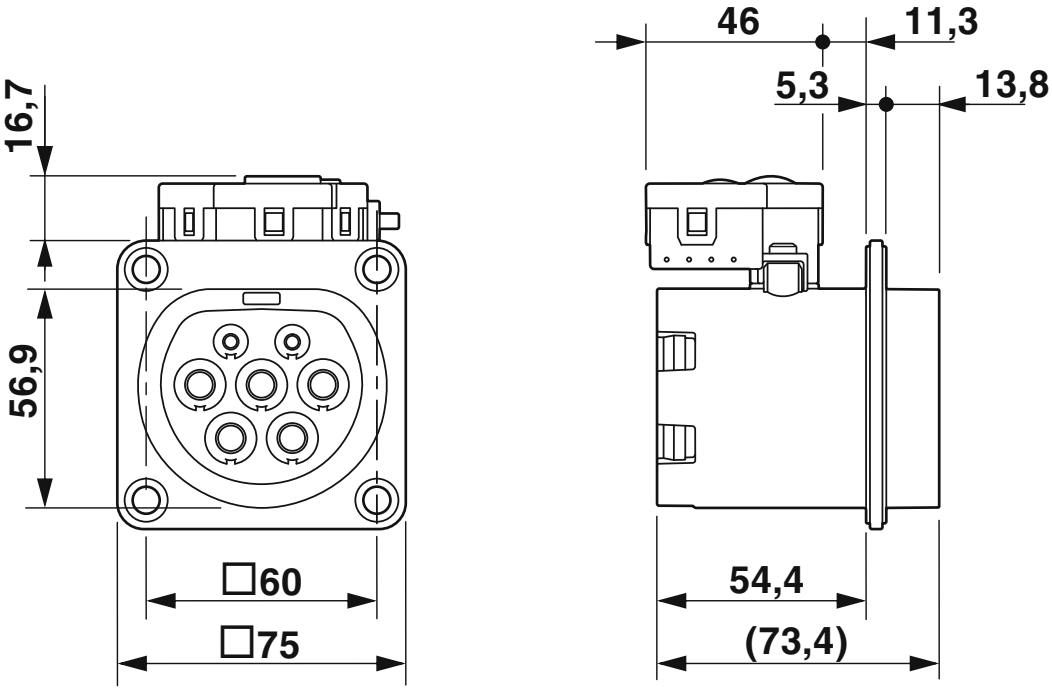

Dimensional drawing

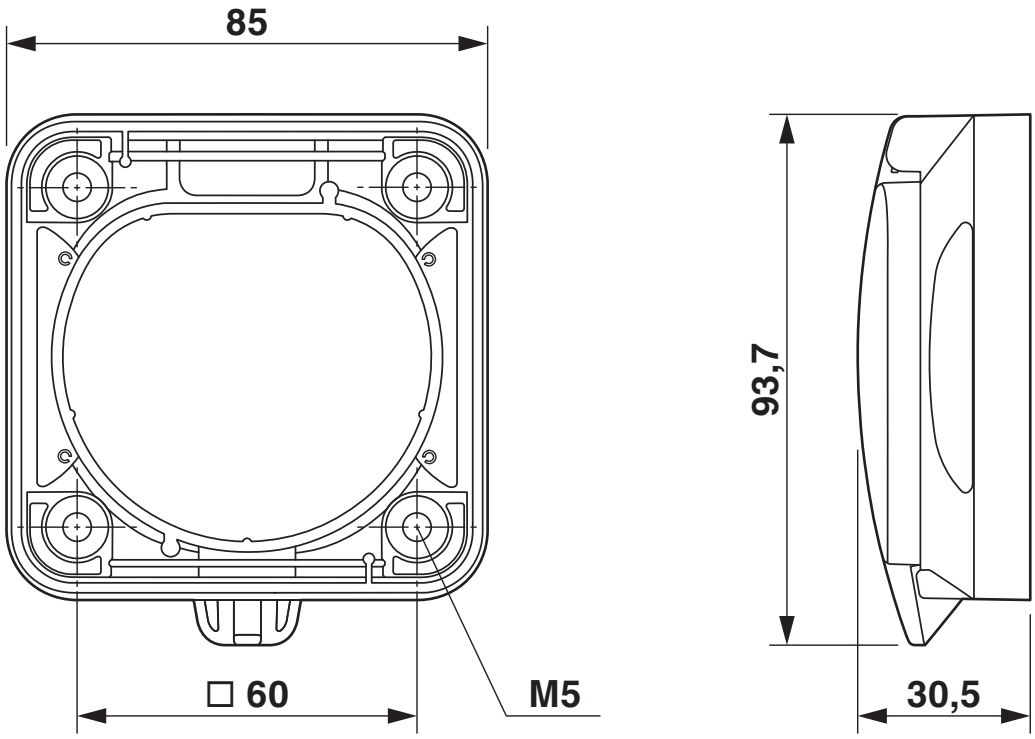


Connection diagram

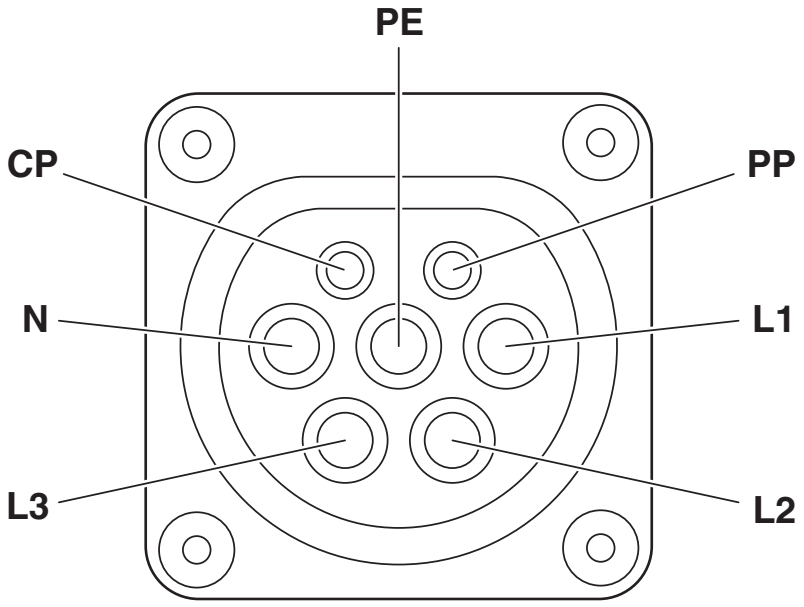


Pin assignment of infrastructure charging socket

Schematic diagram

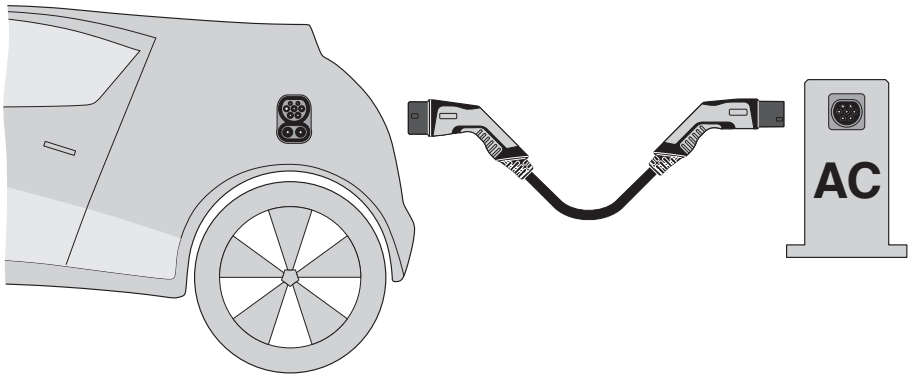


Operating instructions

Schematic diagram

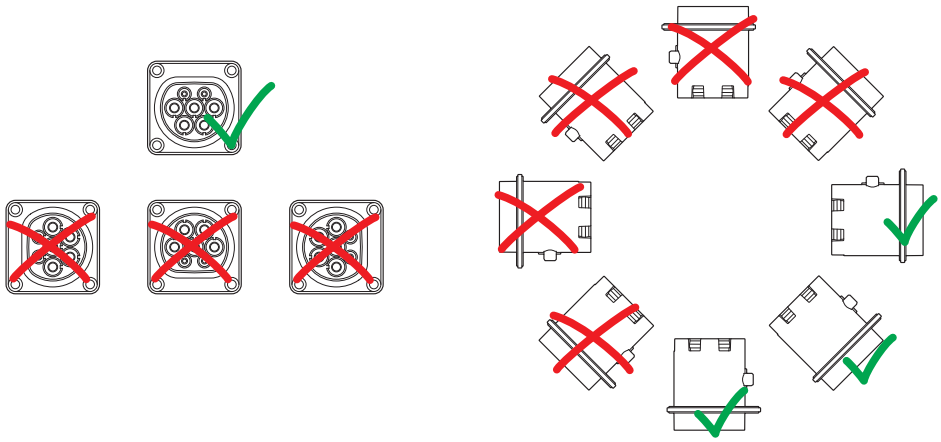


Installation positions

Schematic diagram

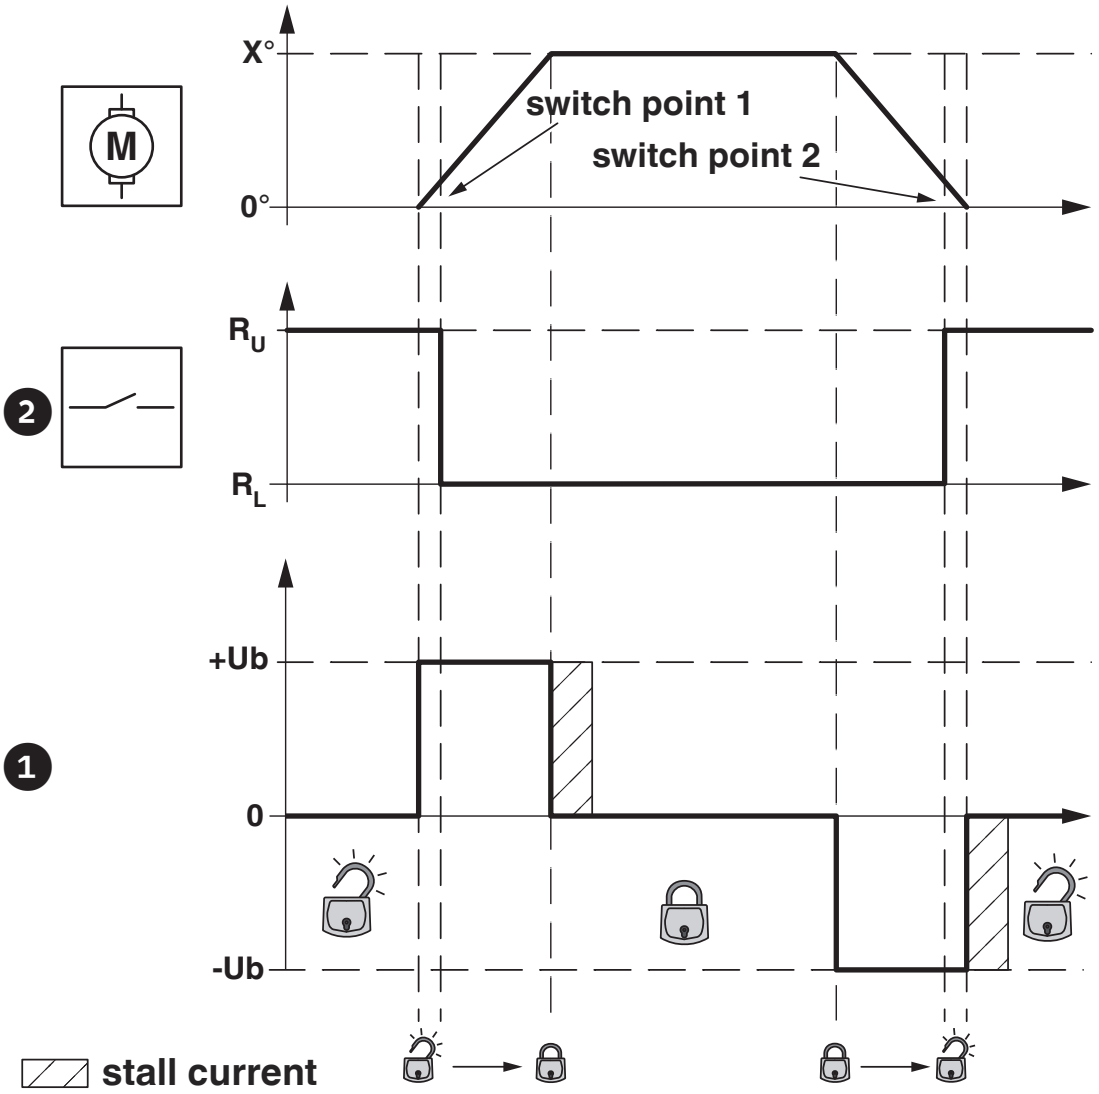


Locking states of the locking actuator

Schematic diagram

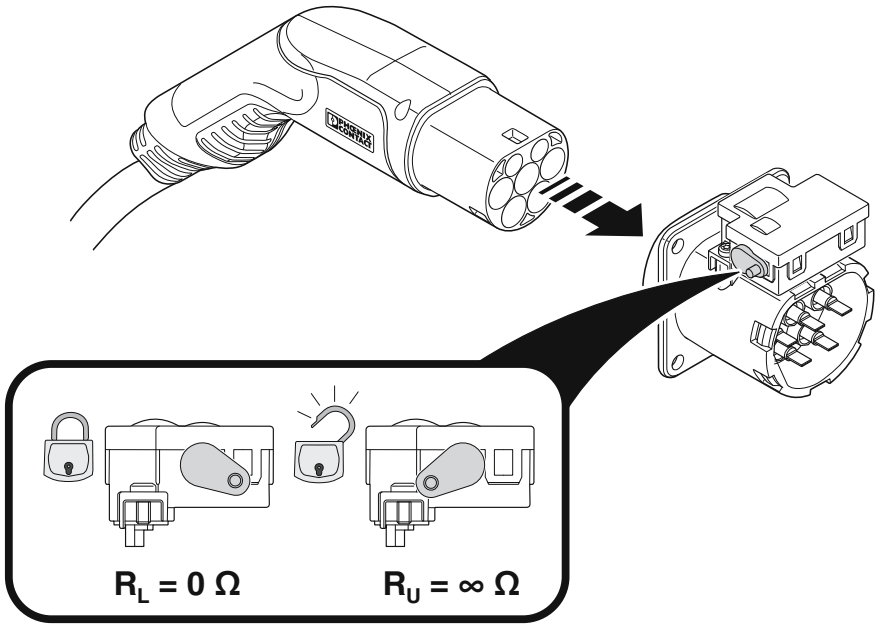

Position of the emergency unlocking lever on the locking actuator

Block diagram

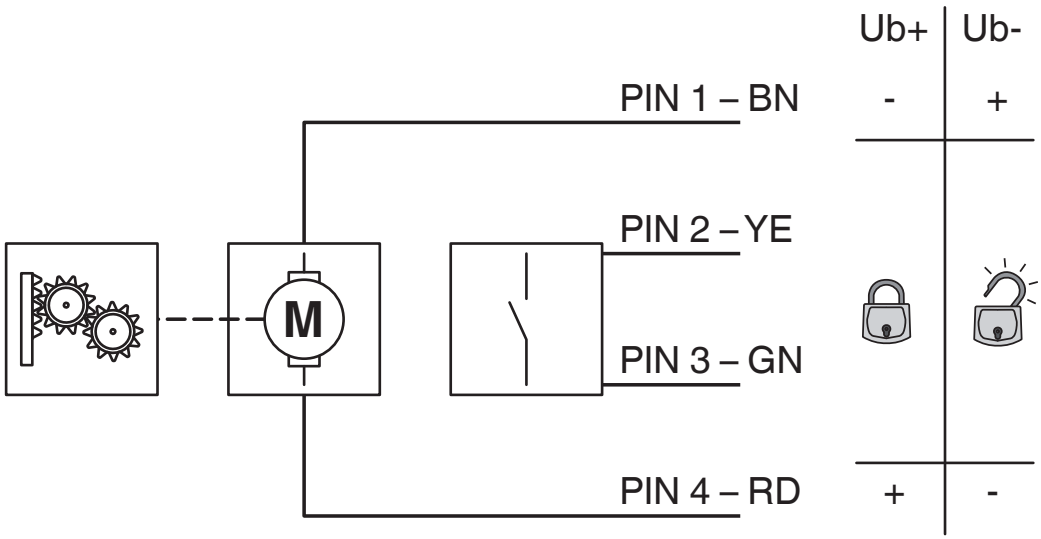

Block diagram of the locking actuator

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1268355

VDE Gutachten mit Fertigungsüberwachung
Approval ID: 40053862

Classifications

ECLASS

ECLASS-13.0	27144706
ECLASS-15.0	27144706

ETIM

ETIM 9.0	EC002898

UNSPSC

UNSPSC 21.0	39121800

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Not applicable, No electrical and electronic equipment (EEE), cannot be used in EEE

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	6d58ee40-d5b9-455a-b149-6e68aa1cba24

Accessories

EV-LABEL-C-SO - Label

1315521

https://www.phoenixcontact.com/us/products/1315521



CHARX connect, Label, Accessories, For AC type 2 infrastructure charging socket and for AC type 2 infrastructure charging plug, DIN EN 17186

EV-T2SOC-B - Protective cover

1164293

https://www.phoenixcontact.com/us/products/1164293



CHARX connect modular, Type 2, Protective cover, Accessories, Basic, square, Front mounting, M5 thread, with self-locking mechanism, for attaching to infrastructure charging sockets, Embossed PHOENIX CONTACT logo, IEC 62196-2

EV-T2M3SOW-1AC32A-0,3M6,0E - Cable set for infrastructure charging socket

1164343

https://www.phoenixcontact.com/us/products/1164343




CHARX connect modular, Type 2, Cable set for infrastructure charging socket, 32 A , 250 V AC, Accessories, Single wires, length: 0.3 m, Plug-in mounting, with slip-on sleeve at one end, only for connection to second-generation infrastructure charging sockets from Phoenix Contact, IEC 62196-2

EV-T2M3SOW-3AC20A-0,3M2,5E - Cable set for infrastructure charging socket

1164355

https://www.phoenixcontact.com/us/products/1164355



CHARX connect modular, Type 2, Cable set for infrastructure charging socket, 20 A , 480 V AC, Accessories, Single wires, length: 0.3 m, Plug-in mounting, with slip-on sleeve at one end, only for connection to second-generation infrastructure charging sockets from Phoenix Contact, IEC 62196-2

EV-T2M3SO12-4P-BL-SET - Infrastructure charging socket

1268355

https://www.phoenixcontact.com/us/products/1268355

EV-T2M3SOW-3AC32A-0,3M6,0E - Cable set for infrastructure charging socket

1164362

https://www.phoenixcontact.com/us/products/1164362



CHARX connect modular, Type 2, Cable set for infrastructure charging socket, 32 A , 480 V AC, Accessories, Single wires, length: 0.3 m, Plug-in mounting, with slip-on sleeve at one end, only for connection to second-generation infrastructure charging sockets from Phoenix Contact, IEC 62196-2

EV-T2M3SOW-1AC32A-0,7M6,0E - Cable set for infrastructure charging socket

1164344

https://www.phoenixcontact.com/us/products/1164344



CHARX connect modular, Type 2, Cable set for infrastructure charging socket, 32 A , 250 V AC, Accessories, Single wires, length: 0.7 m, Plug-in mounting, with slip-on sleeve at one end, only for connection to second-generation infrastructure charging sockets from Phoenix Contact, IEC 62196-2

EV-T2M3SO12-4P-BL-SET - Infrastructure charging socket

1268355

https://www.phoenixcontact.com/us/products/1268355

EV-T2M3SOW-3AC20A-0,7M2,5E - Cable set for infrastructure charging socket

1164361

https://www.phoenixcontact.com/us/products/1164361



CHARX connect modular, Type 2, Cable set for infrastructure charging socket, 20 A , 480 V AC, Accessories, Single wires, length: 0.7 m, Plug-in mounting, with slip-on sleeve at one end, only for connection to second-generation infrastructure charging sockets from Phoenix Contact, IEC 62196-2

EV-T2M3SOW-3AC32A-0,7M6,0E - Cable set for infrastructure charging socket

1164365

https://www.phoenixcontact.com/us/products/1164365



CHARX connect modular, Type 2, Cable set for infrastructure charging socket, 32 A , 480 V AC, Accessories, Single wires, length: 0.7 m, Plug-in mounting, with slip-on sleeve at one end, only for connection to second-generation infrastructure charging sockets from Phoenix Contact, IEC 62196-2

EV-T2M3SO-CAP - Protective cap

1202424

https://www.phoenixcontact.com/us/products/1202424



CHARX connect modular, Type 2, Protective cap, Accessories, circular, for strain relief and touch protection, IEC 62196-2

EV-T2M3SO-CAP-REMOVER - Removal tool

1286836

https://www.phoenixcontact.com/us/products/1286836



CHARX connect modular, Type 2, Removal tool, Accessories, for removing the protective cap for strain relief and touch protection, which is mounted on the back of the infrastructure charging sockets

EV-T2M3SO12-4P-BL-SET - Infrastructure charging socket

1268355

https://www.phoenixcontact.com/us/products/1268355

CHARX SEC-1000 - AC charging controller

1139034

https://www.phoenixcontact.com/us/products/1139034



CHARX control modular, AC charging controller, IEC 61851-1, operating mode: Stand-Alone, Client, interface: CHARX control modular system bus, Connectable peripheral devices: Energy meter, RFID, DC residual current detection, DIN rail mounting

CHARX SEC-3000 - AC charging controller

1139022

https://www.phoenixcontact.com/us/products/1139022



CHARX control modular, AC charging controller, with Embedded Linux system, IEC 61851-1, operating mode: Stand-Alone, Client, Server, interface: Ethernet (2 x), CHARX control modular system bus, MICRO-USB type C, communication protocol: OCPP 1.6J, Modbus/TCP, MQTT, Connectable peripheral devices: Energy meter, RFID, DC residual current detection, DIN rail mounting

EV-T2M3SO12-4P-BL-SET - Infrastructure charging socket

1268355

https://www.phoenixcontact.com/us/products/1268355

CHARX SEC-3050 - AC charging controller

1139018

https://www.phoenixcontact.com/us/products/1139018



CHARX control modular, AC charging controller, with Embedded Linux system, IEC 61851-1, ISO 15118, operating mode: Stand-Alone, Client, Server, interface: Ethernet (2x), CHARX control modular system bus, MICRO-USB type C, communication protocol: OCPP 1.6J, Modbus/TCP, MQTT, Connectable peripheral devices: Energy meter, RFID, DC residual current detection, DIN rail mounting

CHARX SEC-3100 - AC charging controller

1139012

https://www.phoenixcontact.com/us/products/1139012



CHARX control modular, AC charging controller, with Embedded Linux system, IEC 61851-1, operating mode: Stand-Alone, Client, Server, interface: Ethernet (2 x), Cellular communication (4G/2G), CHARX control modular system bus, MICRO-USB type C, communication protocol: OCPP 1.6J, Modbus/TCP, MQTT, Connectable peripheral devices: Energy meter, RFID, DC residual current detection, DIN rail mounting

EV-T2M3SO12-4P-BL-SET - Infrastructure charging socket

1268355

https://www.phoenixcontact.com/us/products/1268355

CHARX SEC-3150 - AC charging controller

1138965

https://www.phoenixcontact.com/us/products/1138965



CHARX control modular, AC charging controller, with Embedded Linux system, IEC 61851-1, ISO 15118, operating mode: Stand-Alone, Client, Server, interface: Ethernet (2x), Cellular communication (4G/2G), CHARX control modular system bus, MICRO-USB type C, communication protocol: OCPP 1.6J, Modbus/TCP, MQTT, Connectable peripheral devices: Energy meter, RFID, DC residual current detection, DIN rail mounting

EM-CP-PP-ETH - AC charging controller

2902802

https://www.phoenixcontact.com/us/products/2902802



EV charge control is used to charge electrical vehicles on the 3-phase AC mains power supply according to IEC 61851-1 Mode 3. All necessary control functions are integrated. Additional functions are available for various charging applications.

VAL-EV-T1/T2 264/12.5/3+1 - Lightning/surge arrester type 1/2

1180149

https://www.phoenixcontact.com/us/products/1180149



CHARX protect advanced: Plug-in lightning surge/surge protective device, in accordance with Type 1/2 / Class I/II, for 3-phase power supply networks with separate N and PE (5-conductor system: L1, L2, L3, N, PE). Specifically designed for use in e-mobility.

VAL-EV-T1/T2 264/12.5/3+1-R - Lightning/surge arrester type 1/2

1180150

https://www.phoenixcontact.com/us/products/1180150



CHARX protect advanced: Plug-in lightning surge/surge protective device, in accordance with Type 1/2 / Class I/II, for 3-phase power supply networks with separate N and PE (5-conductor system: L1, L2, L3, N, PE), with remote indication contact. Specifically designed for use in e-mobility.

EV-T2M3SO12-4P-BL-SET - Infrastructure charging socket

1268355

https://www.phoenixcontact.com/us/products/1268355

VAL-EV-T2 280/3+1 - Type 2 surge arrester

1180144

https://www.phoenixcontact.com/us/products/1180144



CHARX protect basic: Plug-in surge protective device, in accordance with Type 2/Class II, for 3-phase power supply networks with separate N and PE (5-conductor system: L1, L2, L3, N, PE). Specifically designed for use in e-mobility.

VAL-EV-T2 280/3+1-R - Type 2 surge arrester

1180145

https://www.phoenixcontact.com/us/products/1180145



CHARX protect basic: Plug-in surge protective device, in accordance with Type 2/Class II, for 3-phase power supply networks with separate N and PE (5-conductor system: L1, L2, L3, N, PE), with remote indication contact. Specifically designed for use in e-mobility.

Phoenix Contact 2025 © - all rights reserved
https://www.phoenixcontact.com

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com