

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2022/02/16	Yuwei Chou	Change Rev.01 to Rev.A
B	C220318	2022/03/11	Yuwei Chou	⚠B *2

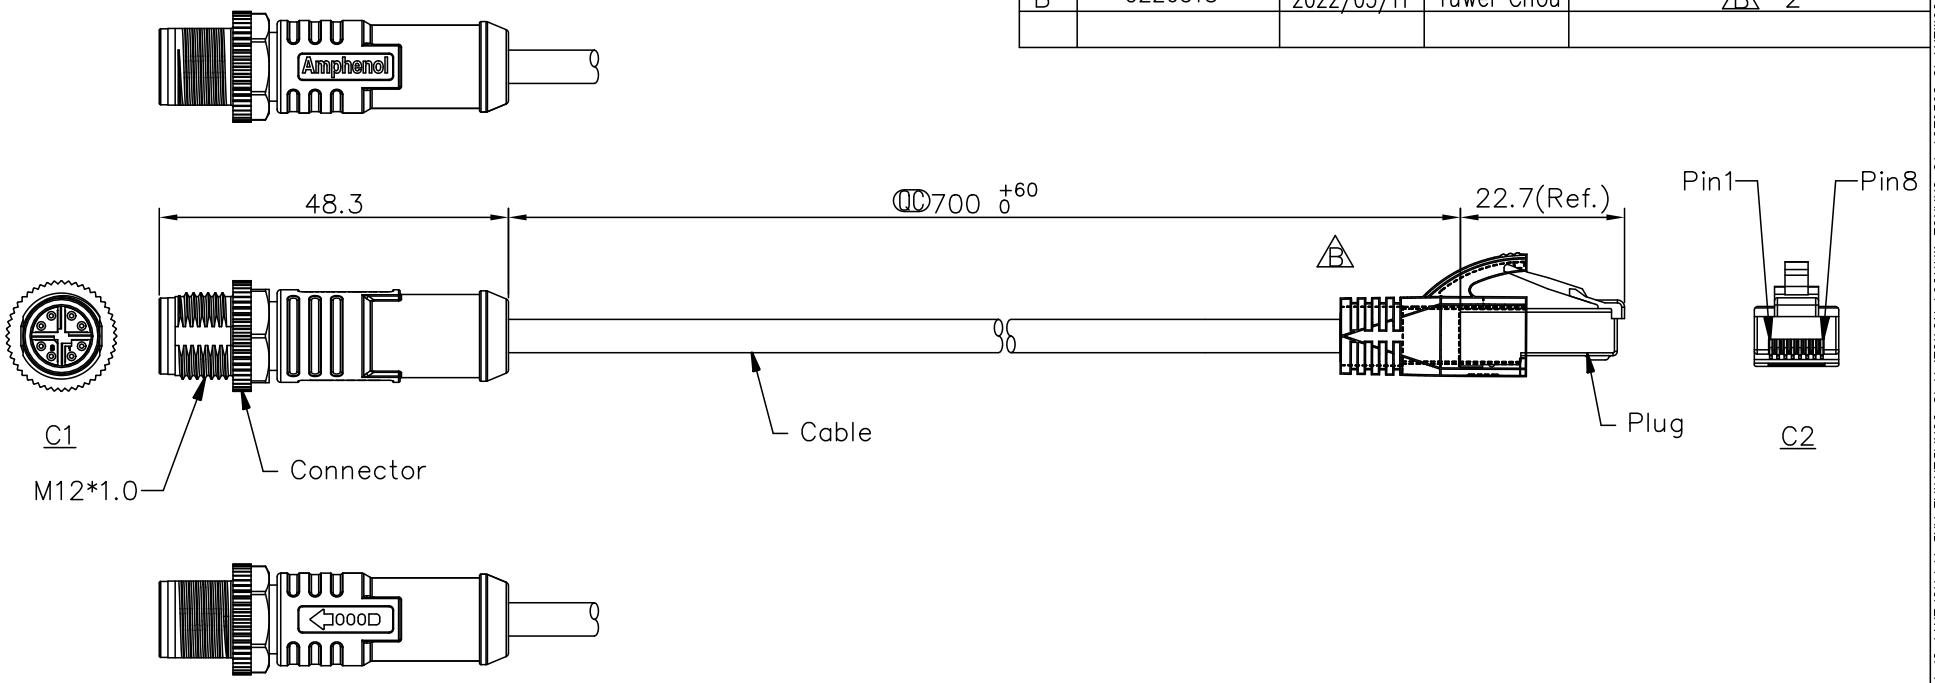



C1

8P

Pin Assignments
Front View

Shield	Braid	編織	Shield	
6	Brown	棕	8	Twist
5	White/Brown	白/棕	7	
4	Green	綠	6	Twist
3	White/Green	白/綠	3	
8	Blue	藍	4	Twist
7	White/Blue	白/藍	5	
2	Orange	橘	2	Twist
1	White/Orange	白/橘	1	
C1	Wire Color		C2	
	Pin Out			

Note:
* RoHS Compliant
* QC Important dimension
* C1
 Waterproof rate: IPX7, mated
 Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 Nut: Metal
 Shield: Metal
 Outer mold: Thermoplastic, Black
* C2
 Waterproof rate: Non-Waterproof
 Plug: RJ45, Shielded
⚠B * Cable: CAT-6A, S/FTP, 26#*4P+AL/MY+B, TPU Jacket, OD=6.8, Green.

UNIT: mm

TOLERANCE
±0.5 mm

TITLE
ACC, SEN, X Code, DB-ENDED
MM

SCALE Free | SHEET 1 OF 1

REV. B | SIZE A4 | QC : Inspection Item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO ADC2-DXMS08AF115	DRAWN BY Yuwei Chou	DATE 2022/02/16
DWG NO ADC2-DXMS08AF115	CHECKED BY Aric Ko	DATE 2022/02/16
CUSTOMER ALTW	APPROVED BY Max Yang	DATE 2022/02/16

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.