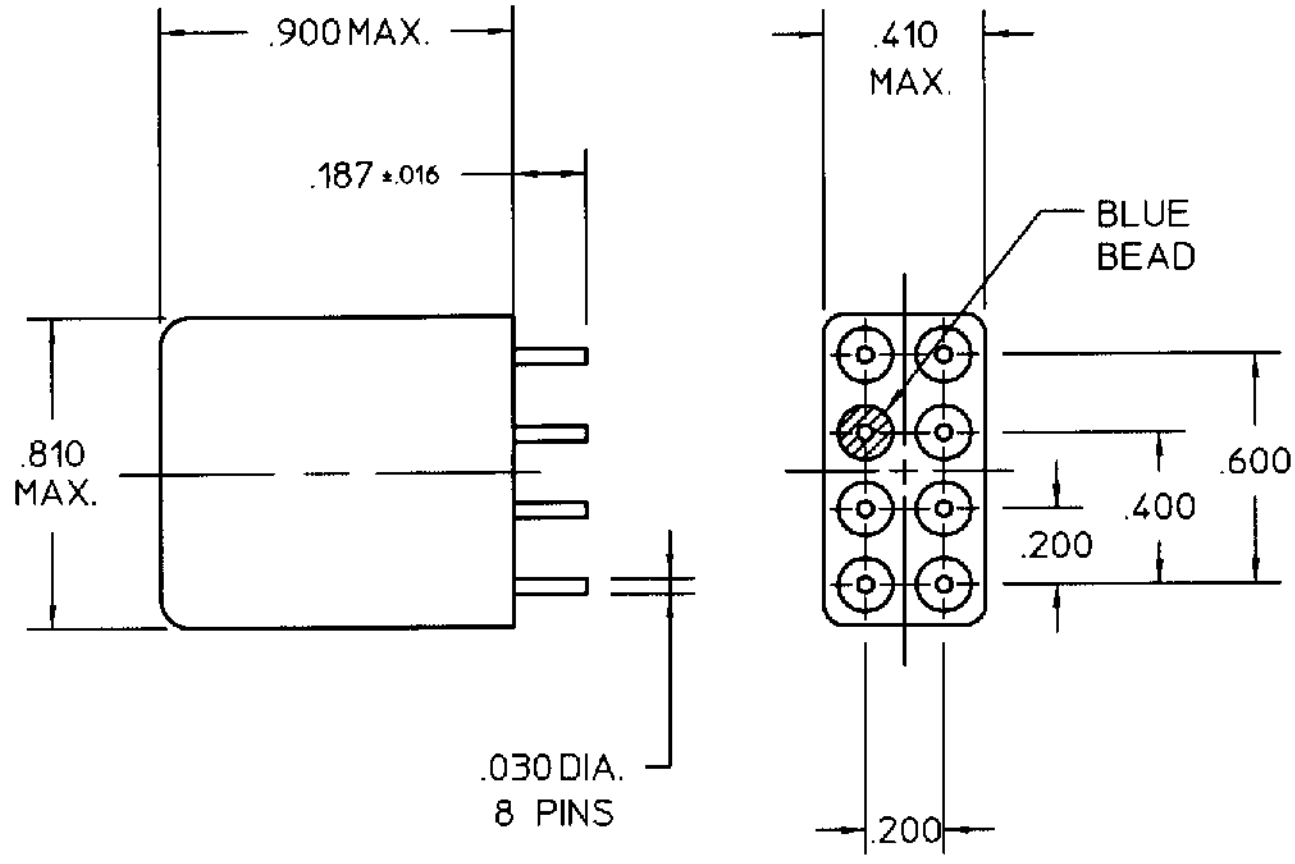


REV. 0

DCO 15692

COIL: @ 25°C

RESISTANCE	5000 OHMS ±10%
NOMINAL VOLTAGE	28.0 VDC
MUST OPERATE	2.8 mADC
MUST RELEASE	0.3 mADC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 15 MS MAX ① (HI-G IS 8 MS)
RELEASE 10 MS MAX ② (HI-G IS 4 MS)

CUSTOMER DATA SHEET

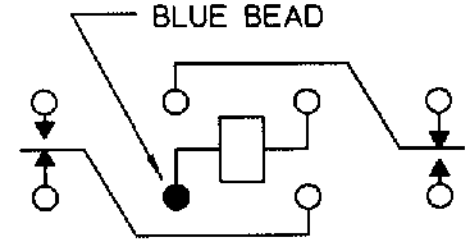

CONTACT RATING: 2 AMPS 30 VDC
RESISTIVE 100,000 OPERATIONS

DR. B.D. 6/4/99 CK

COMMUNICATIONS INSTRUMENTS, INC.

CUST. HI-G
CUST. NO. 2BK-2A-128

TYPE "SF" RELAY

SF6201W01