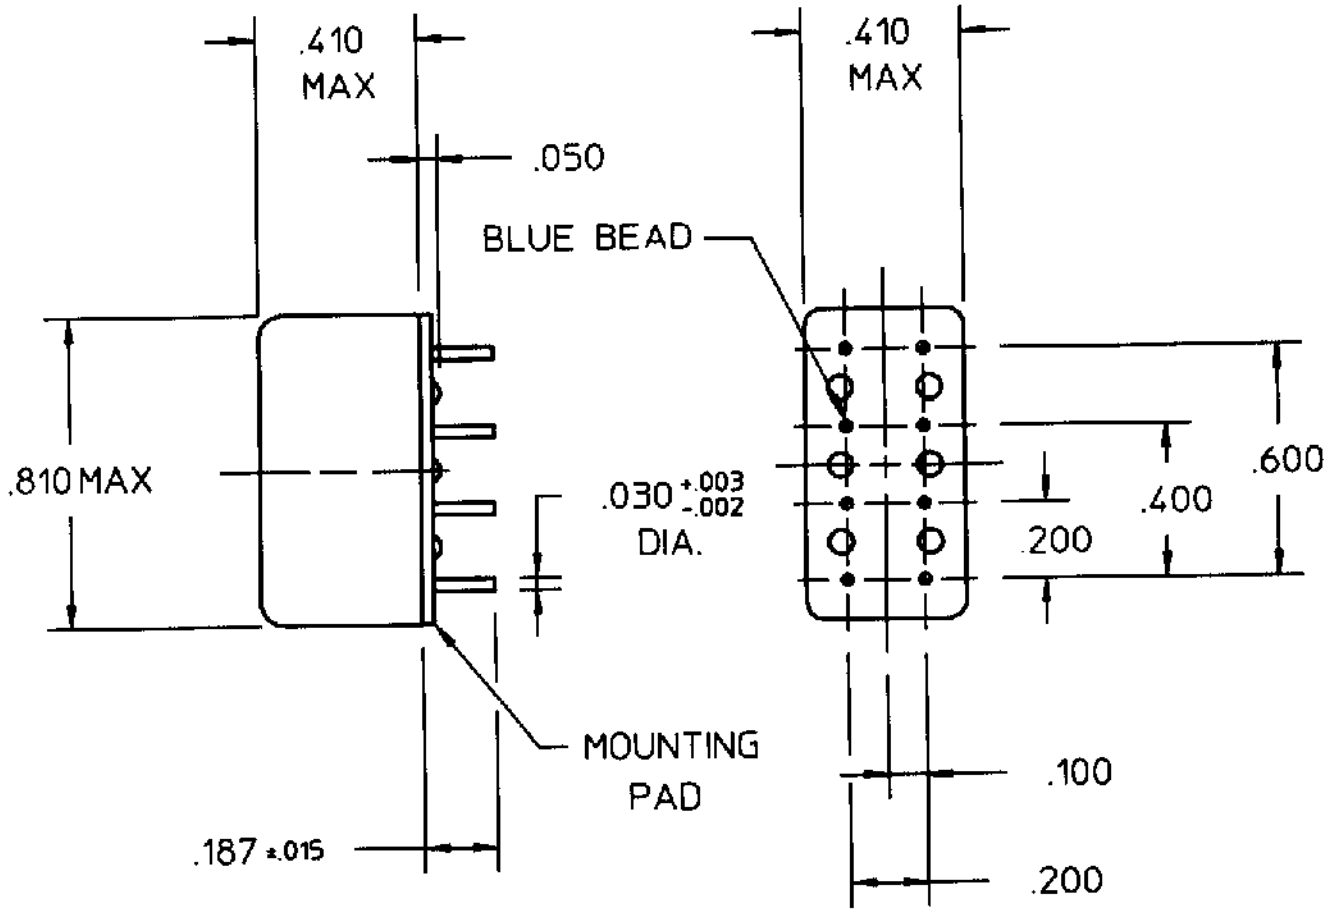


REV. 1 7/17/92

COIL: @ +25 ° C

RESISTANCE	2074 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.4 VDC
MUST RELEASE	1.4 VDC

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 5 MS MAX.
RELEASE 3 MS MAX.
BOUNCE 3 MS MAX.

CUST. Hi-G
CUST. NO. 2KA-2A-126P

TYPE "HMS" RELAY

CUSTOMER DATA SHEET

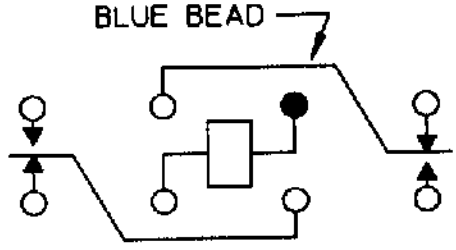

CONTACT RATING: LOW LEVEL TO 2A
30 VDC RESISTIVE .75A 30 VDC INDUCTIVE
100,000 OPERATIONS MIN.

DR. R.B. 5/19/92 | CK. 7/17/92

COMMUNICATIONS INSTRUMENTS, INC.

HMS1201S62