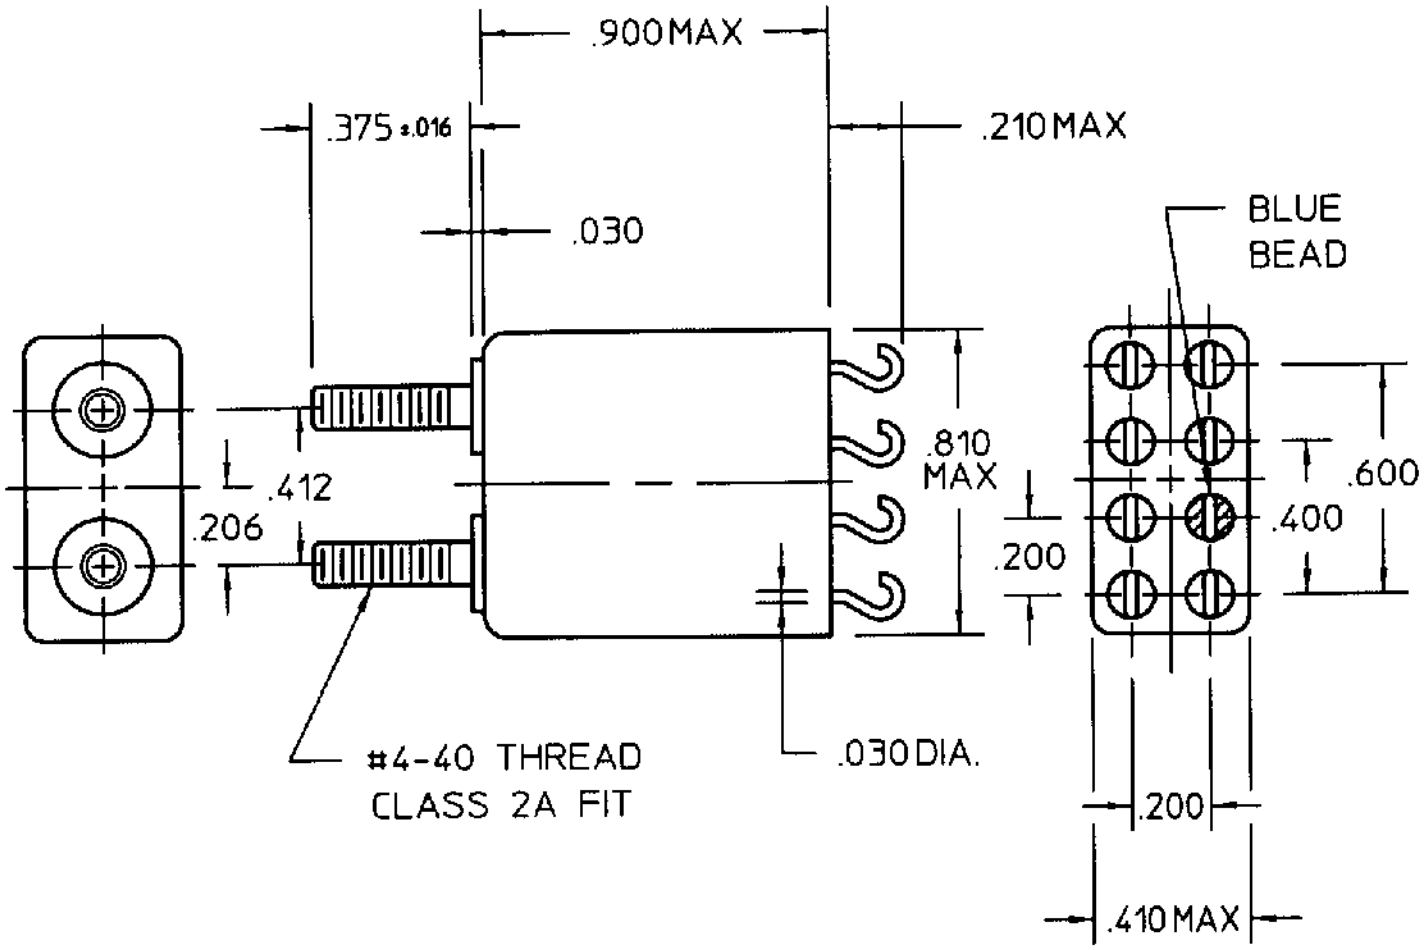


REV. 0

DCO 15753

COIL: @ 25°C

RESISTANCE 160 OHMS ± 10%

NOMINAL VOLTAGE 12.0 VDC

MUST OPERATE 6.3 VDC

MUST RELEASE .75 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 6 MS MAX.
RELEASE TIME 3 MS MAX.
CONTACT BOUNCE 3 MS MAX.

CUSTOMER DATA SHEET

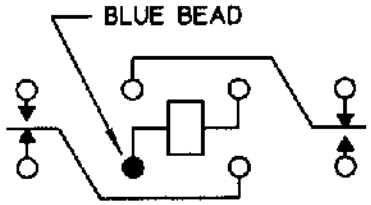

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
2 AMPS 30 VDC RESISTIVE
100,000 OPERATIONS

DR. B.D. 7/20/99 | CK. GAH 7-20-99

COMMUNICATIONS INSTRUMENTS, INC.

CUST. HI-G

CUST. NO. 2B-1C-112 REV.

FW RELAY

FW1102S07