



Connectors > RF Connectors > Coax Connectors



RF Interface: **SMA**

RF Connector Style: **Plug**

RF Connector Mated Outer Diameter (Approximate): **8.99 mm [.354 in]**

Impedance: **50 Ω**

RF Connector Coupling Mechanism: **Threaded**

Features

Product Type Features

Connector Seal & Plug Type	Interface Seal
Connector Product Type	Connector Assembly
RF Interface	SMA
RF Connector Style	Plug
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	1
Number of Coaxial Contacts	1

Electrical Characteristics

Impedance	50 Ω
-----------	------

Body Features

Body Material	Stainless Steel
Body Material Finish	Passivated

Contact Features

Ferrule Plating Material	Tin-Lead
Ferrule Material	Brass, Copper Alloy
Crimp Type	Hexagonal Crimping



RF Connector Center Contact Underplating Material	Nickel
RF Connector Center Contact Plating Material	Gold (Au)
RF Connector Center Contact Material	Brass

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

RF Connector Coupling Mechanism	Threaded
Connector Mounting Type	Cable Mount (Free-Hanging)
RF Contact Captivation Method	Mechanical

Housing Features

Body Orientation	Straight
------------------	----------

Dimensions

Product Length	30.18 mm[1.188 in]
RF Connector Mated Outer Diameter (Approximate)	8.99 mm[.354 in]

Operation/Application

Operating Frequency Range	18 GHz
---------------------------	--------

Packaging Features

Packaging Method	Package
------------------	---------

Other

Coupling Nut Base Material	Stainless Steel
Coupling Nut Plating Finish	Passivated
Grade	Military
Dielectric Material	Polytetrafluoroethylene (PTFE)

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2019 (197)



SVHC > Threshold:
Not Yet Reviewed

Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE’s information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) ‘Guidance on requirements for substances in articles’(Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of ‘complex object’, the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA “Guidance on requirements for substances in articles” (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts



TE Part # 220061-1
DAHT COAXICON RG188 RG58 C
ASSY

Also in the Series | SMA



Battery Holders(1)




Connector Adapters & Connector Savers(8)



Connector Caps & Covers(3)



Connector Strain Relief(1)

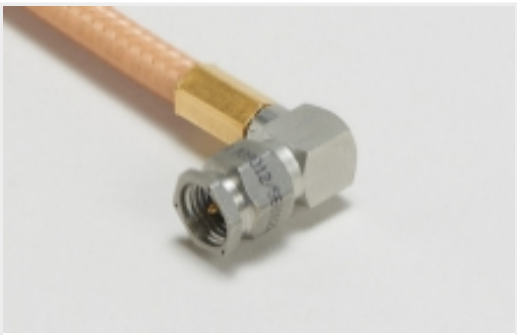

[RF Cable Assemblies\(119\)](#)

Customers Also Bought

TE Part #1SNA115124R0700
[M35/16](#)

TE Part #203964-1
[SER "M" GUIDE SOCKET ASSM.](#)

TE Part #207476-1
[CABLE CLAMP KIT,SZ 5](#)

TE Part #284392-8
[TERMI-BLOK PCB SIDE ENTRY STAC](#)

TE Part #324001
[SPLICE,SOLIS BUTT STRAP 24-20](#)

TE Part #650948-5
[048 EURO TYPE C PIN ST ASSY](#)

TE Part #1-794953-6
[16P PM PLUG VAL-U-LOK V2](#)

TE Part #2-1393030-1
[SSRT-240D10 = PANEL MOUNT,10A, 240VAC](#)

TE Part #1577622-1
[TERMINAL, PEEK PIDG STRATO, 20AWG](#)

TE Part #5749914-2
[AMPLI CABLE CLAMP KIT,SZ 1](#)

Documents

Product Drawings

[KIT, COMMERIAL SMA PLUG ASSY](#)

English

CAD Files

Customer View Model

[ENG_CVM_221117-2_C.3d_igs.zip](#)

English

Customer View Model



[ENG_CVM_221117-2_C.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_221117-2_C.2d_dxf.zip](#)

English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Instruction Sheets

Instruction Sheet (U.S.)

English

SMA Series Commercial 50-OHM RF Connectors for Flexible Cable

English