
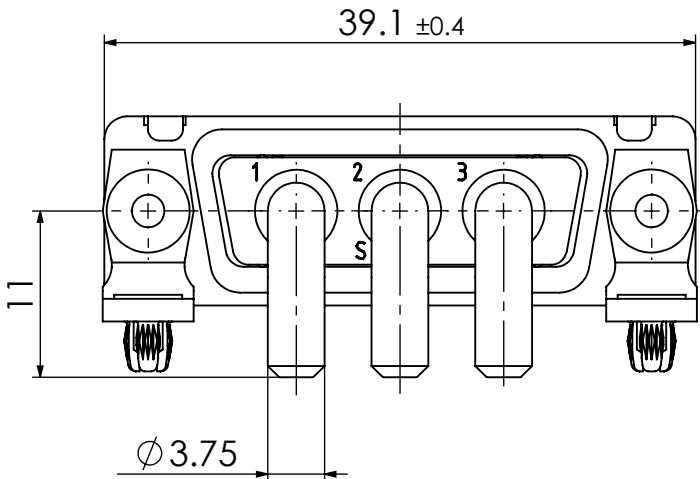
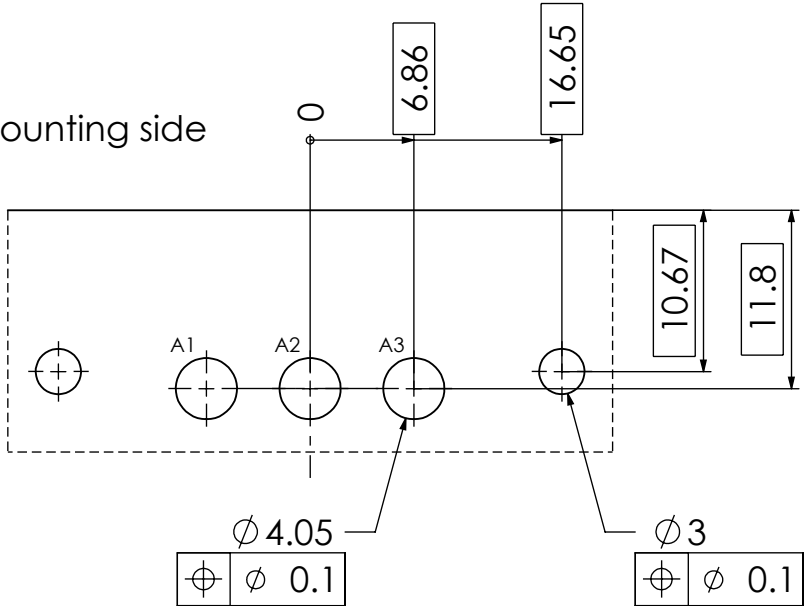
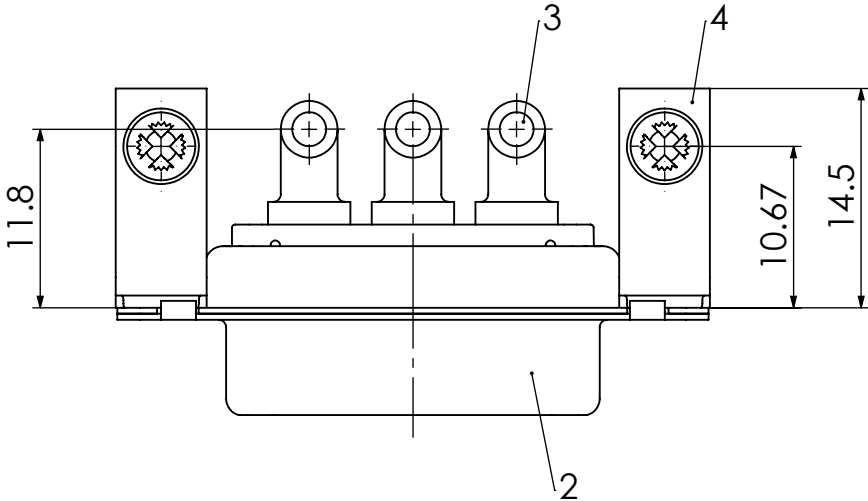
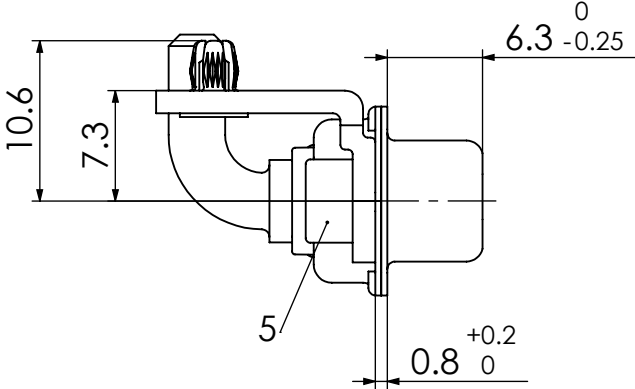


RoHS compliant by exemption

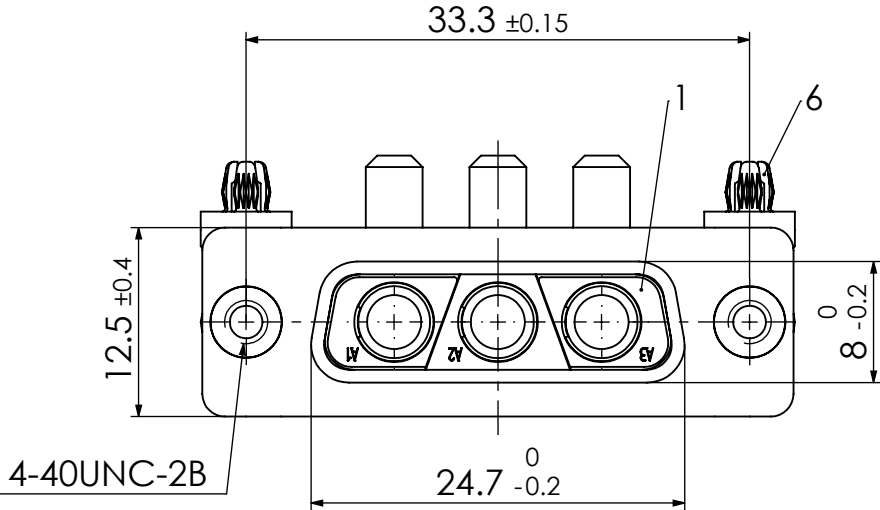

6	2	Snap-in rivet	PCB 1.6mm / Brass	tin plated
5	2	Clinch nut	MW 4-40 / Steel	tin plated
4	2	Bracket	F1080-13B / Steel	tin plated
3	3	High power contact	FMP009P104R	40A
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C to +130°C) acc. UL94V-0	black
<i>No.</i>	<i>St.</i>	<i>Part</i>	<i>Type Description/Material</i>	<i>Surface plating/Colour/Class</i>

FUNCTIONAL SYMBOLS F = 0 F = 0 F = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
	DIMENSION UNITS mm		SCALE 2:1		MEASUREMENTS WITHOUT TOLERANCE ACC. TO ISO 2768-m				molex				
					CURRENT REVISION								
					DRWN: DRAWN BY msteinbrueck 21-09-2023				FCT D-Sub Mixed-Layout Connector				
					APPR: APPR BY mteubel 29-11-2023								
					INITIAL REVISION				PRODUCT CUSTOMER DRAWING				
	2 24410				MATERIAL NUMBER				REVISION				
	1				DRWN: DRAWN BY MTeubel 15-10-2015				1731070809		2		
	REV. CH.-NO.				APPR: APPR BY sschref 19-10-2015								
	REPLACEMENT FOR: 1731070809_Rev. A1		FRIST ANGLE PROJECTION 		DRAWING A3-SIZE		DOCUMENT NUMBER F3W3SC-5820				CUSTOMER GENERAL MARKET		SHEET NUMBER 1 OF 1

COMMENT: _____