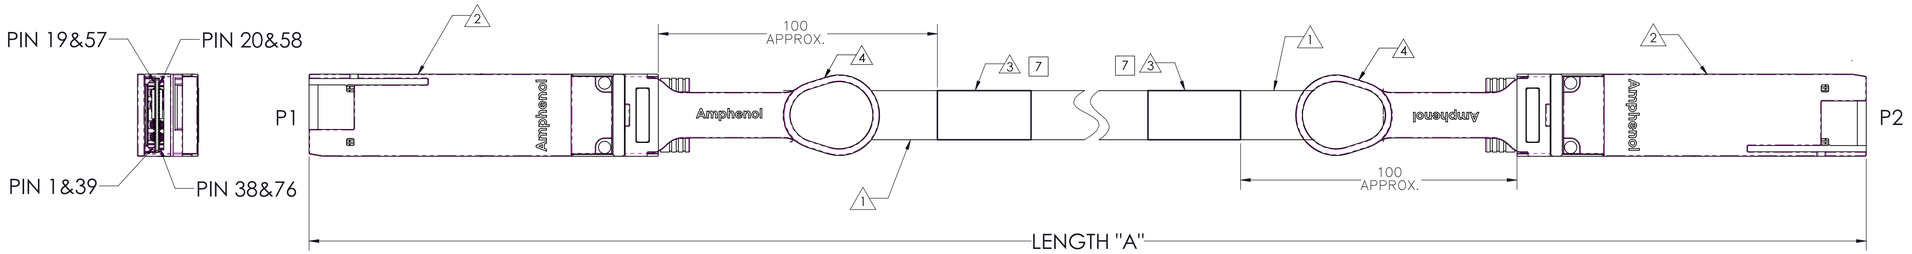
DWG NO.	SH	REV
C-NJYYLK-0099	1	1.0

REVISIONS

ZONE	REV.	ECN NUMBER	DESCRIPTION	BY	DATE	APPROVED
	1.0	MKHN-22072201	NEW RELEASE	M.HUSSAIN	07/2/2022	E.M

TABLE 1	
AHSP P/N	LENGTH "A"
NJYYLK-0001	1000±30MM
NJYYLK-0007	1500±30MM
NJYYLK-0002	2000±40MM
NJYYLK-0008	2500±45MM
NJYYLK-0003	3000±50MM
NJYYLK-0009	3500±55MM







TABLE 2	
ITEM No.	DESCRIPTION
1	32 AWG, 16-PR (ø6.9), VW1 PROTECTIVE PLASTIC NET COVERING WV-1 BLACK
2	PLUG, QSFP-DD, REFERENCE "QSFP-DD MSA"
3	LABEL, WRAPPED - AHSP P/N, REV, DATE CODE, LENGTH, CoO, SERIAL NUMBER & WEEE LOGO AND CE LOGO
4	PULL TAB, BLUE 2718
5	EPROM - REFERENCE QSFP-DD MSA, PAGE A0 ONLY


NOTES:

1. THIS DRAWING IS RESERVED FOR AMPHENOL.
2. ASSEMBLIES SHALL BE COMPLIANT TO QSFP-DD MSA SPECIFICATION.
3. CABLE ASSEMBLIES, COMPONENTS AND SUB-COMPONENTS SHALL BE COMPLIANT TO EU DIRECTIVE 2011/65/EU-RoHS2.
4. CABLE ASSEMBLIES MUST MEET SHIELDING EFFECTIVENESS REQUIREMENTS OF 35DB MINIMUM FROM 1-10GHZ AND 30DB FROM 10-18 GHZ.
5. PACKAGE COMPLETED ASSY IN AN APPROPRIATELY SIZED ESD BAG.
6. UL LABEL MUST BE ON SHIPPING CARTON PER SUBJECT 764 OF THE UL COMPONENT WIRING HARNESS (ZPFW2) FILE #E86140. CSA LABEL MUST BE ON SHIPPING CARTON.

[7] LENGTHS LESS THAN 1.0 METERS ONLY REQUIRE ONE LABEL PLACED ON P1 END.

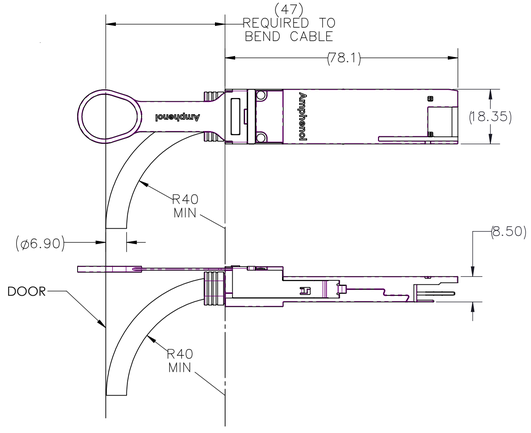

RADIUS FROM END OF DIECAST

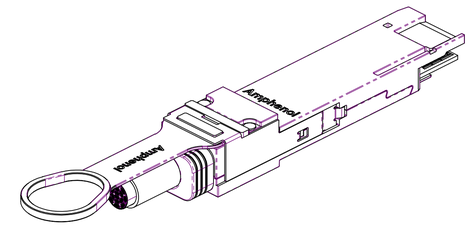

ISOMETRIC VIEW
SCALE: 3:2

TOLERANCES	
0.0	± 0.1
0.00	± 0.08
0.000	± --
ANGLES	± 1.0°

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM

DWN	05/13/2022	M.HUSSAIN
CHK	05/13/2022	M.HUSSAIN
APVD	07/22/2022	C.M

Amphenol AHSP

A Division of Amphenol Corporation
200 Innovative Way, Suite 201, Nashua, N.H. 03062 (603) 879-3000

TITLE: CABLE ASSY, QSFP-DD 112G 100Ω, 32AWG, ACTIVE LINEAR

INTERPRET PER ASME Y14.5

CODE IDENT 31413

CUSTOMER USE DRAWING

PART NO.	REV
SEE TABLE 1	N/A
DRAWING NO. C-NJYYLK-0099	REV. 1.0


SIZE D | SCALE 2:1 | SHEET 1 OF 2

DWG NO. C-NJYYLK-0099 SH 1 REV 1.0

AHSP_szD_mm.drwdot Rev01/201409

DWG NO.	SH	REV
C-NJYYLK-0099	2	1.0

REVISIONS						
ZONE	REV.	ECN NUMBER	DESCRIPTION	BY	DATE	APPROVED
			SEE SHEET 1			

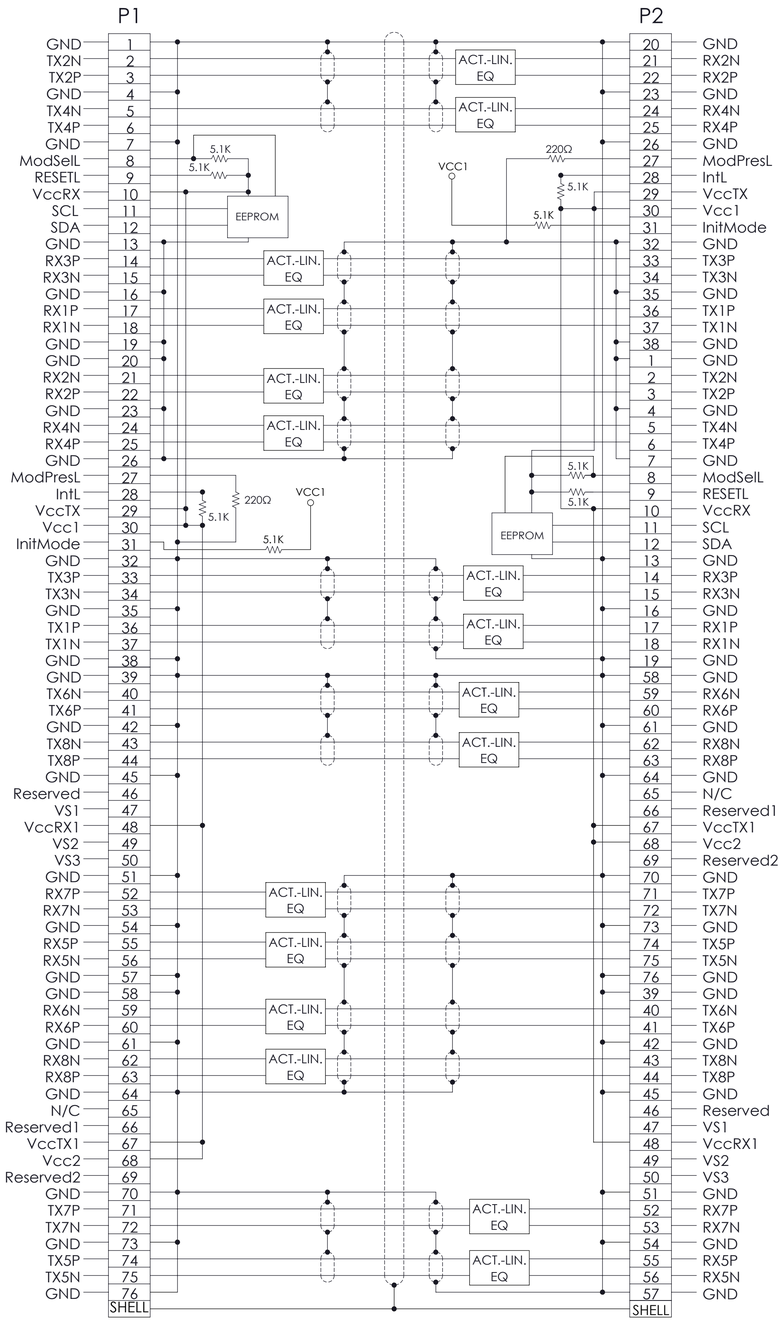

NOTE: DC BLOCKING CAP VALUE IS 100nF

TOLERANCES		DWN	05/13/2022
0.0	± 0.1		M.HUSSAIN
0.00	± 0.08	CHK	05/13/2022
0.000	± —		M.HUSSAIN
ANGLES	± 1.0°	APVD	07/22/2022
			C.M

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM

Amphenol AHSP

A Division of Amphenol Corporation

200 Innovative Way, Suite 201, Nashua, N.H. 03062 (603) 879-3000

TITLE: CABLE ASSY, QSFP-DD 112G 100Ω, 32AWG, ACTIVE LINEAR

INTERPRET PER ASME Y14.5

CUSTOMER USE DRAWING

CODE IDENT 31413

PART NO.	REV
SEE TABLE 1	N/A
DRAWING NO.	REV
C-NJYYLK-0099	1.0

SIZE D | SCALE 1:1 | SHEET 2 OF 2

DWG NO. C-NJYYLK-0099 | SH 2 | REV 1.0

AHSP_szD_mm.drwdot Rev01/201409