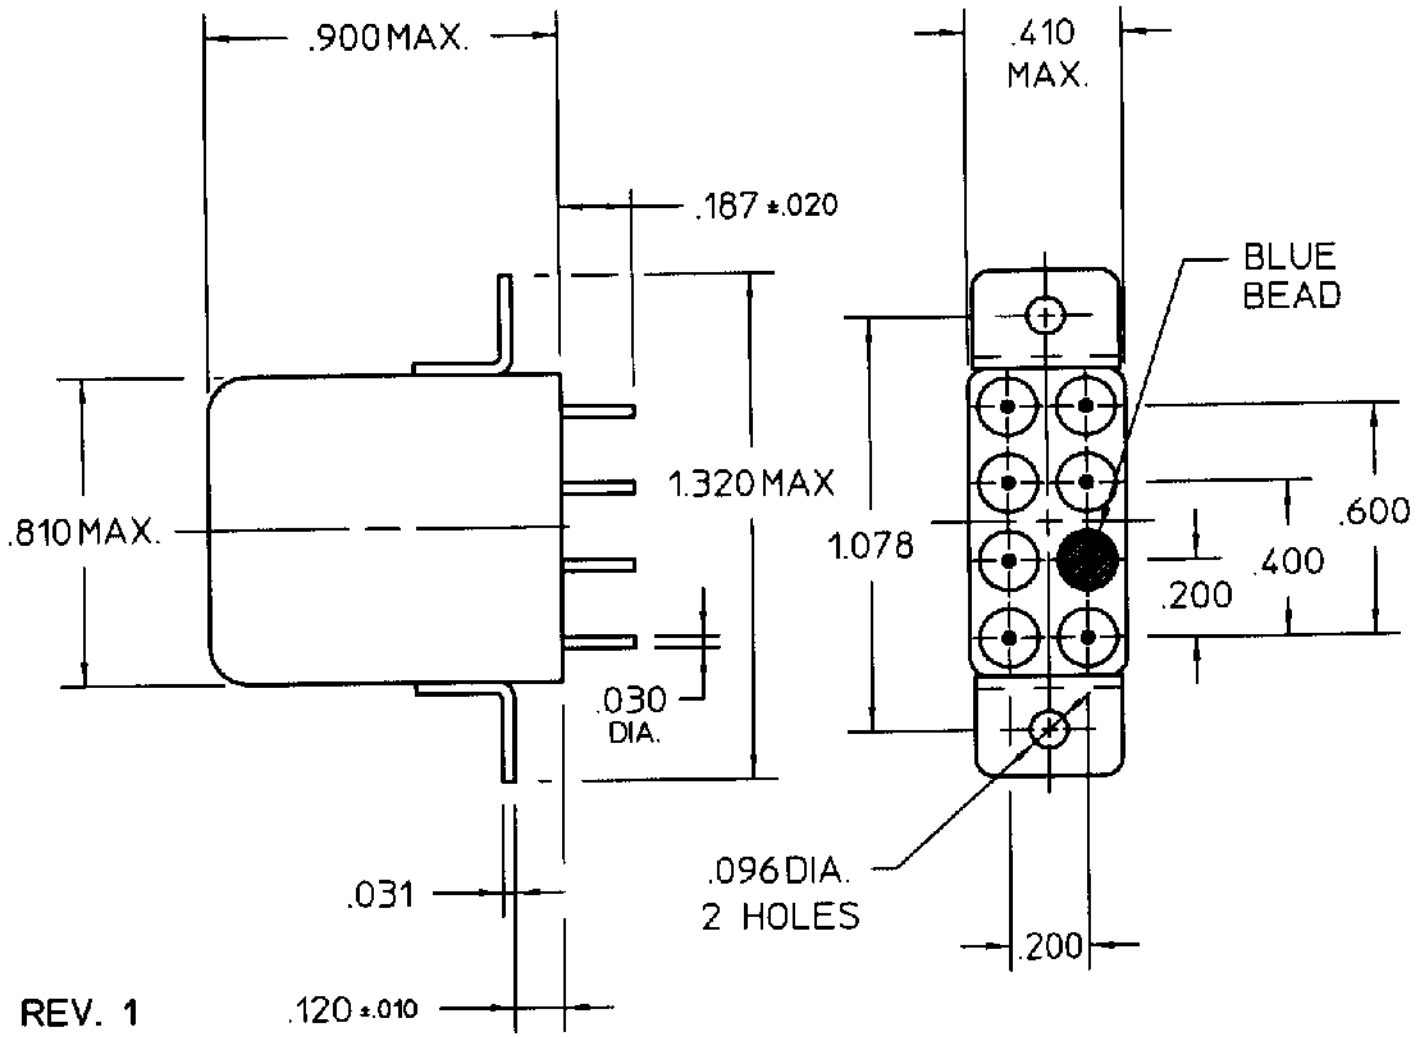


REV. 1
DCO 15852

COIL: @ 25°C

RESISTANCE	2000 OHMS ±10%
NOMINAL VOLTAGE	18.0 VDC
MUST OPERATE	4.5 mADC
MUST RELEASE	0.50 mADC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 15 MS MAX
RELEASE TIME 10 MS MAX
(CATALOG IS 8 MS OPERATE, 4 MS RELEASE)

CUSTOMER DATA SHEET

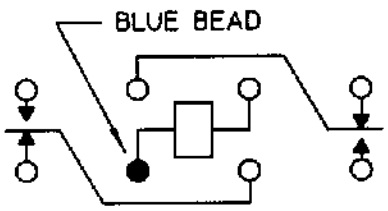

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
2 AMPS 30 VDC, 1 AMP 115 VAC 400 HZ
RESISTIVE 100,000 OPERATIONS

DR. R.B. 2/20/98 | CK. GQB 10/8/99

COMMUNICATIONS INSTRUMENTS, INC.

CUST. HI-G
CUST. NO. 2BK-2E-118 REV.

"SF" RELAY

SF6296H01

F-718 REV. 2