

© – TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	GTP(ECN-23-229279)	02SEP2023	ED	WH

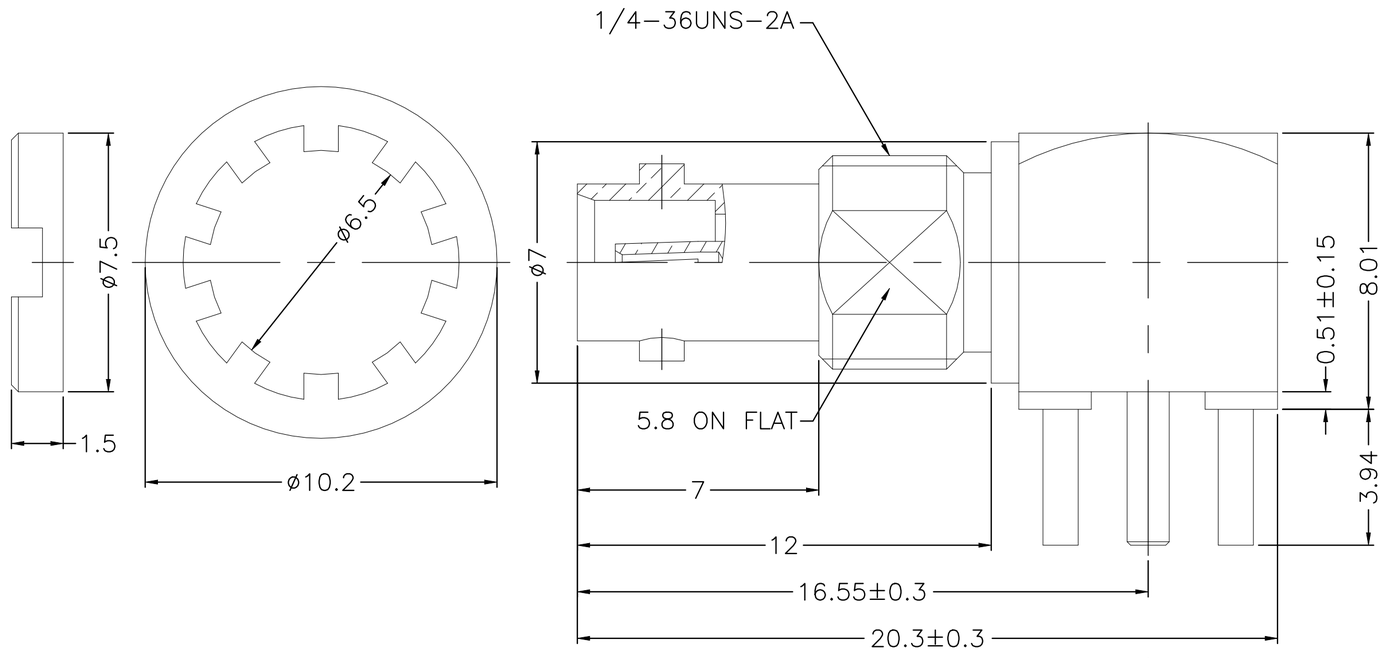

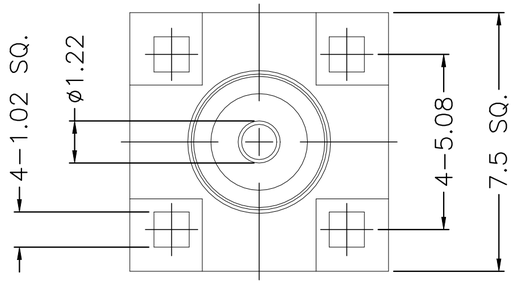

NOTES:

1 PACK IN ACCORDANCE WITH TE SPEC 107-3275;

2 ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED;

3 ELECTRICAL CHARACTERISTICS :
FREQUENCY RANGE : DC-12GHz
NOMINAL IMPEDANCE : 50 OHMS
INSULATION RESISTANCE : 1000 MOHMS
WORKING VOLTAGE : 335 VRMS MAX
DIELECTRIC WITHSTANDING VOLTAGE : 1000 VOLTS MAX
Return Loss : 17dB MAX (DC-12GHz)
CONTACT RESISTANCE :
CENTER CONTACT : 5 mOHMS MAX
OUTER CONTACT : 2.5 mOHMS MAX;

4 MECHANICAL CHARACTERISTICS :
DURABILITY : 500 CYCLES;

5 TEMPERATURE RANGE: -55°-+125°;

6 RoHS: COMPLIANT;

7 MAX. PANEL THICKNESS=2.2mm;


8 NICKEL PLATING 100u" MIN OVER COPPER PLATING;

9 GOLD PLATING 3u" MIN OVER NICKEL PLATING OVER COPPER PLATING;


10 GOLD PLATING 10u" MIN OVER NICKEL PLATING OVER COPPER PLATING;

11 GOLD PLATING 1u" MIN OVER NICKEL PLATING OVER COPPER PLATING;

12 GOLD PLATING 30u" MIN OVER NICKEL PLATING OVER COPPER PLATING.



RECOMMENDED MOUNTING HOLE

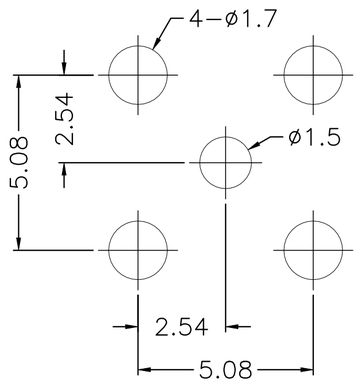

PCB MOUNTING HOLE

1 (8)	1 (8)	1 (8)	BRASS	NUT	7
1 (8)	1 (8)	1 (8)	BRASS	LOCK WSHER	6
1	1	1	PTFE,NATURAL	INSULATOR	5
1 (12)	1 (10)	1 (11)	BRASS	HOUSING	4
1 (12)	1 (10)	1 (9)	BERYLLIUM COPPER	CONTACT PIN	3
1	1	1	PTFE,NATURAL	INSULATOR	2
1 (8)	1 (8)	1 (8)	BRASS	BODY	1
2446155-3	2446155-2	2446155-1	MATERIAL	DESCRIPTION	ITEM
QUANTITY PER ASSY			PARTS LIST		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± 0.3
1 PLC ± 0.2
2 PLC ± 0.1
3 PLC ± –
4 PLC ± –
ANGLES ± 5'

MATERIAL –

FINISH –

DWN	24APR2023 ED
CHK	24APR2023 RZ
APVD	24APR2023 WH
PRODUCT SPEC	–
APPLICATION SPEC	–
WEIGHT	0

TE Connectivity

NAME: HIGH DENSITY BNC(50OHM) R/A MOUNT JACK,PCB, BULKHEAD,DC-12GHZ
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-2446155	–

CUSTOMER DRAWING | SCALE 1 | SHEET 1 OF 1 | REV A

2446155