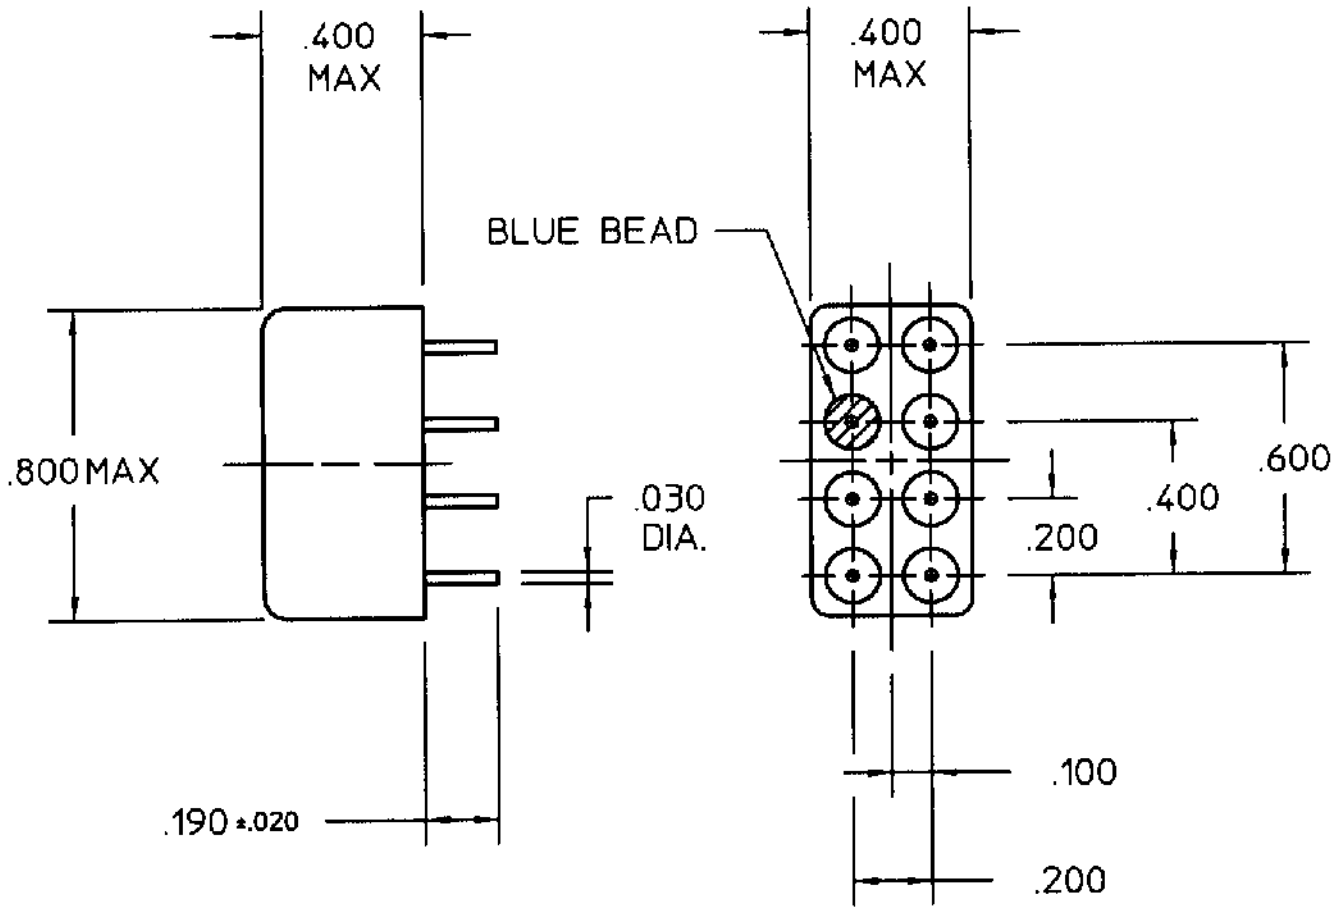


REV. 0
DCO 16189

COIL: @ 25°C

RESISTANCE 47 OHMS ±10%

NOMINAL VOLTAGE 3.2 - 7.0 VDC

MUST OPERATE 2.2 VDC

MUST RELEASE 1.32 VDC MAX 0.21 VDC MIN

ENVIRONMENT:


VIBRATION 10 CPS TO 2500 CPS @ 20 g's

SHOCK 50 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 6 MS MAX
RELEASE 5 MS MAX
CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

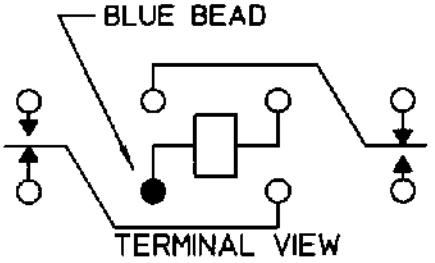

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. P.B.B. 3/29/00 | CK. TLG 5-26-00

COMMUNICATIONS INSTRUMENTS, INC.

CUST. GENICOM
CUST. NO. 3SAV5004A2 REV.

"HMS" RELAY

HMS1201S121