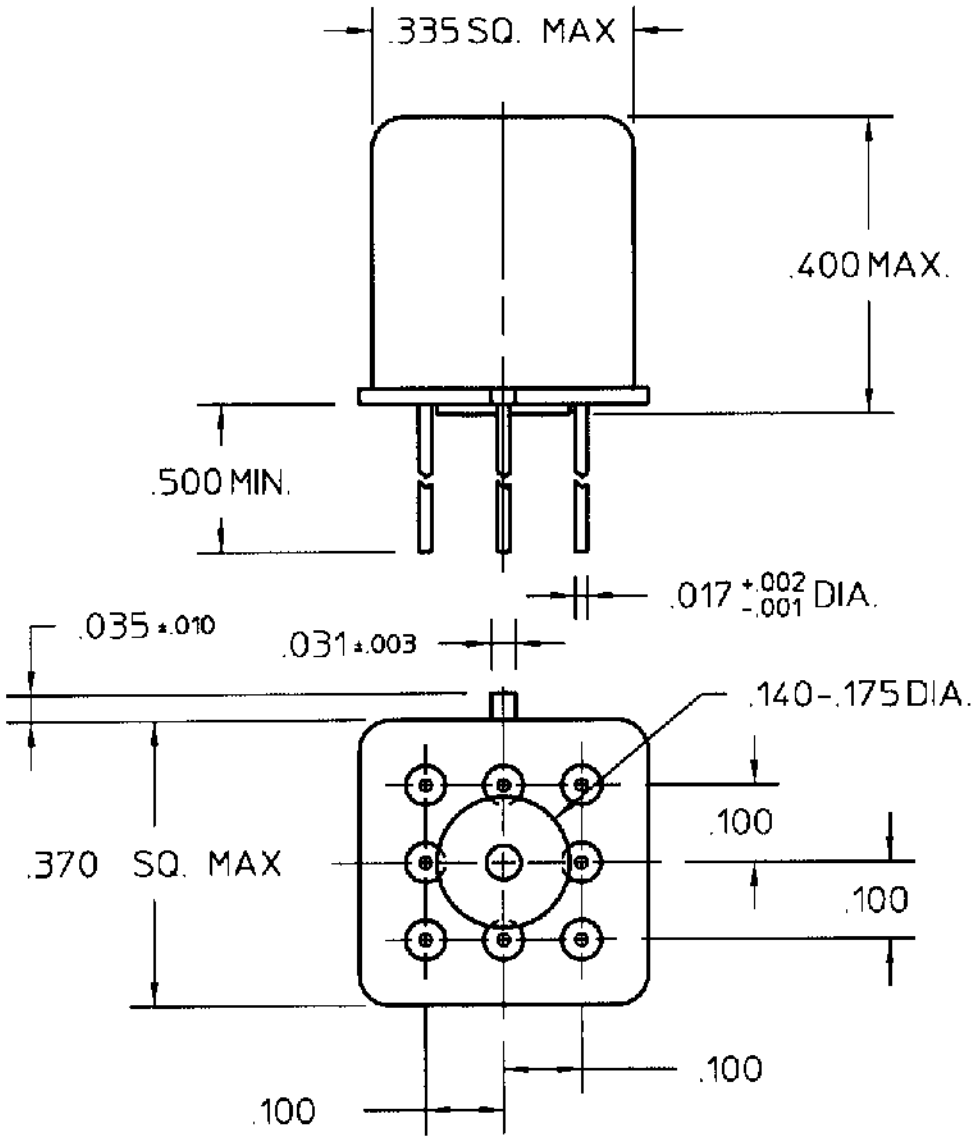


COIL: @ 25°C

RESISTANCE	200 OHMS ± 10%
NOMINAL VOLTAGE	6.0 VDC
MUST OPERATE	3.4 VDC
MUST RELEASE	2.0 VDC MAX. 0.28 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX
RELEASE TIME 7.5 MS MAX
CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS MIN

DR. R.B 12/19/97 CK JERRY 12/19/97

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M39016/42-050P

TYPE JMGSD RELAY

JMGSCD-6PW