CUC-PP-FR19:1U-I-EMPTY:24 - Marshalling panel

1422978

https://www.phoenixcontact.com/us/products/1422978

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Patch bay, 19" mounting, IP20, with 24 slots selectively for RJ45 cable connection modules, RJ45 coupling modules, LC duplex, SC simplex and MPO, medium gray



Your advantages

- Assembly without special tools
- Rugged design

Commercial data

Item number	1422978
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB18
Product key	ABNLBA
Catalog page	Page 391 (C-2-2019)
GTIN	4055626319926
Weight per piece (including packing)	808 g
Weight per piece (excluding packing)	808 g
Customs tariff number	85389099
Country of origin	CN

Technical data

Product properties

Product type	Patch panel
Application	Installation slots for RJ45 cable connection module, adapter-free, and various FO couplings
Connection profile	RJ45
No. of cable outlets	24
Number of slots	24

Electrical properties

Insulation resistance	according to IEC 61010-1
Transmission medium	FO

Connection data

Connection method	Quick connection

Dimensions

Dimensional drawing	
Width	482.6 mm
Height	43.6 mm
Depth	83.4 mm

Material specifications

Color	gray
Material	Steel, galvanized
Flammability rating according to UL 94	V0
Housing material	PC-GF

Cable/line

Tensile strength short-term/long-term	150N (Modul)

Mechanical properties

Tensile strength short-term/long-term	150N (Modul)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
	IP20
Ambient temperature (operation)	5 °C ... 55 °C

Ambient temperature (storage/transport)	-5 °C ... 55 °C
Ambient temperature (assembly)	-25 °C ... 55 °C

Mounting

Mounting type	19" rack
Assembly note	Observe the grounding concept

Drawings

Dimensional drawing

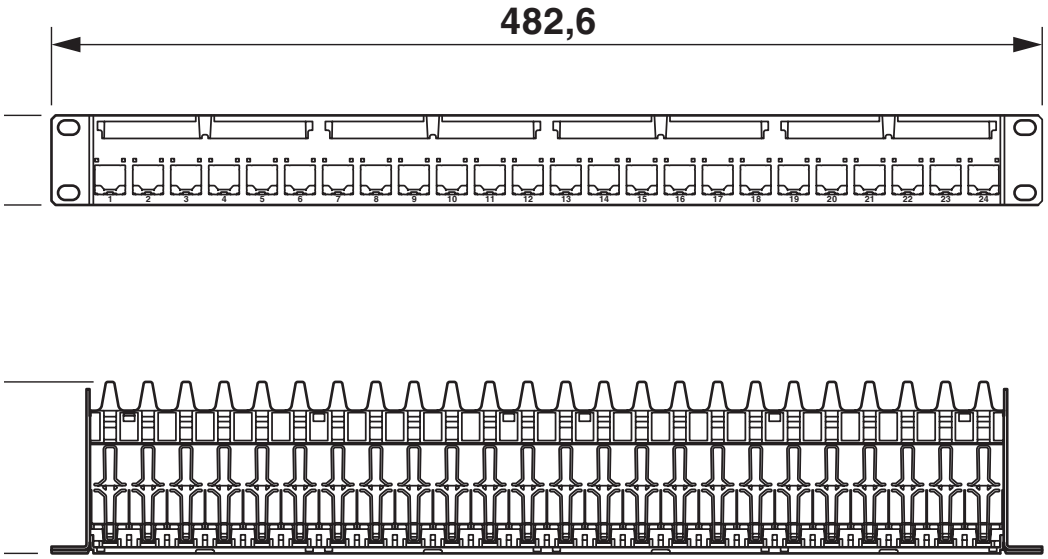

19" patch panel

Classifications

ECLASS

ECLASS-11.0	27440210
ECLASS-12.0	27440210
ECLASS-13.0	27440210

ETIM

ETIM 9.0	EC002310

UNSPSC

UNSPSC 21.0	39121400

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Accessories

CUC-I-J1ZNI-S/R4IDC8 - RJ45 jack insert

1417274

https://www.phoenixcontact.com/us/products/1417274



RJ45 jack insert, design: RJ45, degree of protection: IP20, number of positions: 8, 10 Gbps, $CAT6_A$, material: Metal, connection method: IDC connection, connection cross section: AWG 26- 22, cable outlet: straight, Adapter-free design, Ethernet

MICROFOX-SP-1 - Diagonal cutter

1212487

https://www.phoenixcontact.com/us/products/1212487



Electronic diagonal cutter, tapered head, without chamfer, with opening spring, non-reflective phosphate-treated surface, punched version

CUC-PP-PATCHBAY - Marshalling panel

1407994

https://www.phoenixcontact.com/us/products/1407994

Marshalling panel, design: 19" rack/fixed housing, degree of protection: IP20, material: Steel, powder-coated, connection method: Screw connection, color: light grey RAL 7035



CUC-PP-PATCHBAY-MH - Marshalling panel

1409283

https://www.phoenixcontact.com/us/products/1409283

Marshalling panel, design: 19" rack/fixed housing, degree of protection: IP20, material: Steel, powder-coated, connection method: Screw connection, housing size: 1, color: light grey RAL 7035



CUC-PP-PATCHBAY-MH BK - Marshalling panel

1409284

https://www.phoenixcontact.com/us/products/1409284

Marshalling distributor panel, 19", 1 HU, with 5 metal brackets, color similar to RAL 9005



CUC-I-D1ZNI-S/R4GC8 - RJ45 coupling

1041760

https://www.phoenixcontact.com/us/products/1041760

RJ45 coupling, degree of protection: IP20, number of positions: 8, 10 Gbps, $CAT6_A$, material: Metal, connection method: Coupling, cable outlet: straight, Adapter-free design, Ethernet



FOC-I-D1PGN-S/LCGCSM - Fiber optic coupling

1041780

https://www.phoenixcontact.com/us/products/1041780



Fiber optic coupling, design: LC, degree of protection: IP20, number of positions: 2, material: Plastic, connection method: Coupling, cable outlet: straight

FOC-I-D1PGR-S/SCGCSM - Fiber optic coupling

1041800

https://www.phoenixcontact.com/us/products/1041800



Fiber optic coupling, design: SC, degree of protection: IP20, number of positions: 2, material: Plastic, connection method: Coupling, cable outlet: straight

FOC-I-D1PGY-S/MPAGC - Fiber optic coupling

1041820

https://www.phoenixcontact.com/us/products/1041820



Fiber optic coupling, degree of protection: IP20, number of positions: 2, material: Plastic, connection method: Coupling, cable outlet: straight, Ethernet

FOC-I-D1PGY-S/MPBGC - Fiber optic coupling

1041840

https://www.phoenixcontact.com/us/products/1041840



Fiber optic coupling, degree of protection: IP20, number of positions: 2, material: Plastic, connection method: Coupling, cable outlet: straight, Ethernet

CUC-PP-FRAME-SCREWSET - Screw set

1407989

https://www.phoenixcontact.com/us/products/1407989



Screw set, fixing material for the frame

Phoenix Contact 2024 © - all rights reserved
https://www.phoenixcontact.com

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com