




Connectors > Terminal Blocks & Strips > Modular Terminal Blocks

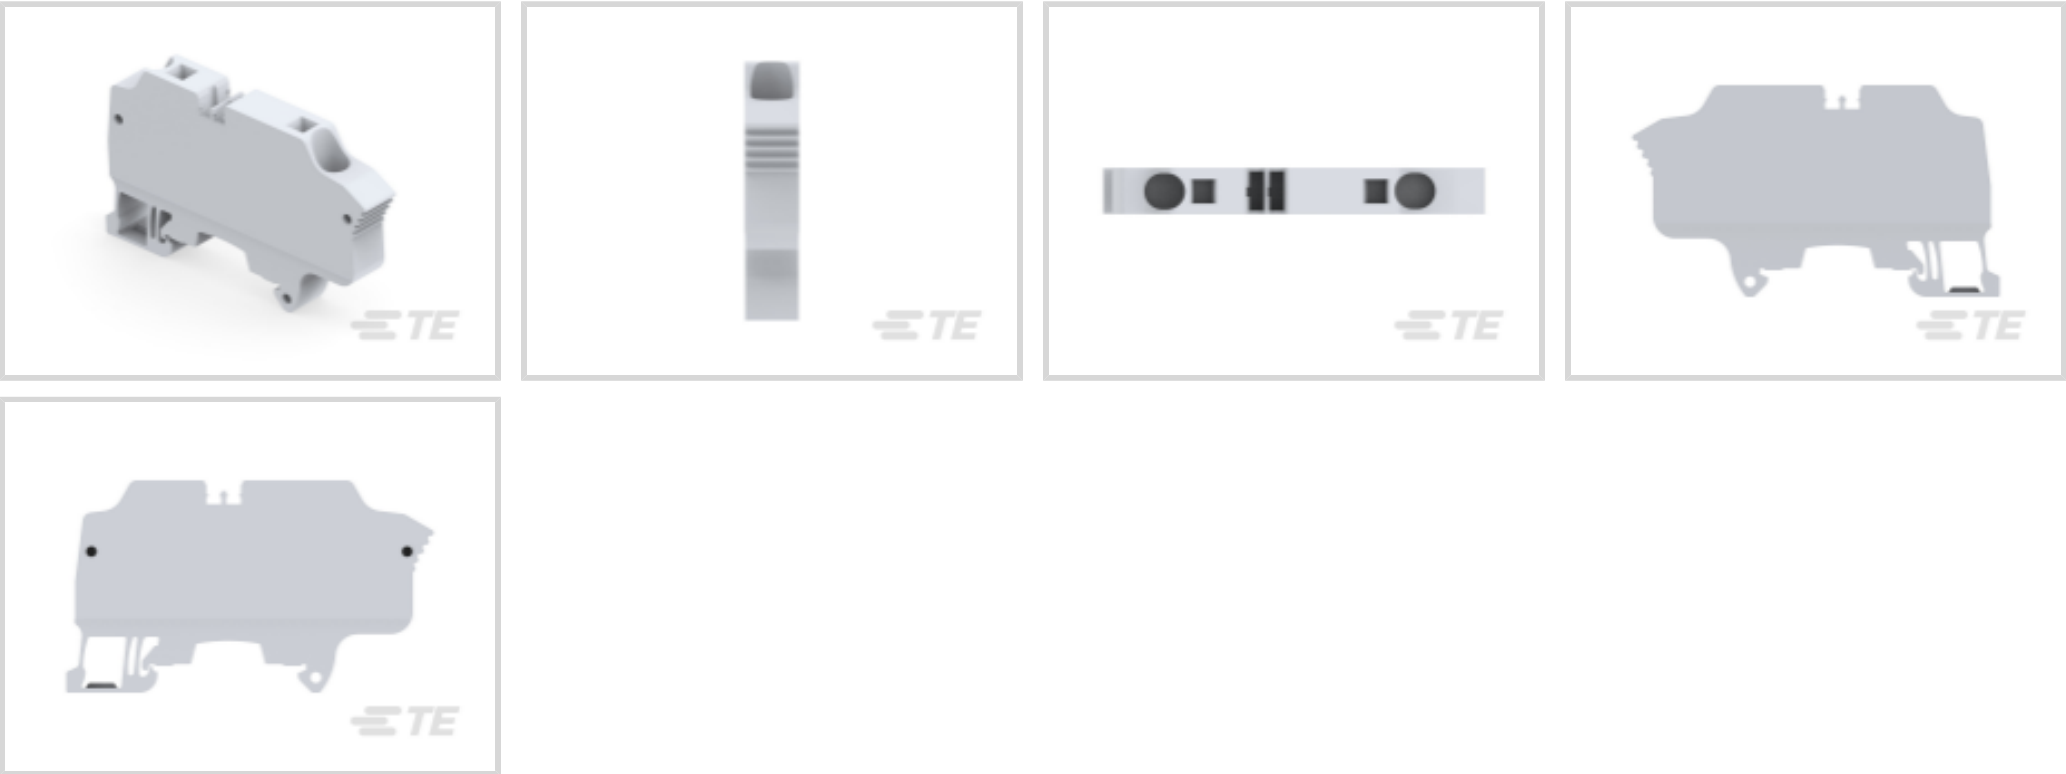

Block Function: **Feed-Through**

Modular Terminal Block Product Type: **PI-Spring Terminal Block**

Primary Product Color: **Gray**

Product Spacing: **12 mm [.472 in]**

Number of Positions: **2**

Features

Product Type Features

|                                     |                          |
|-------------------------------------|--------------------------|
| Modular Terminal Block Product Type | PI-Spring Terminal Block |
|-------------------------------------|--------------------------|

Configuration Features

|                     |                  |
|---------------------|------------------|
| Number of Levels    | 1                |
| Gauge Type          | A6 & 5.1 mm Dia. |
| Block Function      | Feed-Through     |
| Number of Positions | 2                |

Electrical Characteristics

|                                                          |        |
|----------------------------------------------------------|--------|
| Power Loss                                               | 1.8 W  |
| Operating Voltage Rating (UL & CSA) (Max) - Main Circuit | 1000 V |
| Impulse Withstanding Voltage Rating (IEC)                | 8000 V |
| Current Rating (IEC)                                     | 57 A   |
| Current Rating (UL)                                      | 55 A   |
| Current Rating (CSA)                                     | 55 A   |
| Dielectric Withstanding Voltage (Max)                    | 2200 V |



Short-Time Withstanding Current Rating @ 1s

1200 A

Body Features

|                       |                   |
|-----------------------|-------------------|
| Product Weight        | 29.86 g[1.176 oz] |
| Primary Product Color | Gray              |

Mechanical Attachment

|                         |                   |
|-------------------------|-------------------|
| DIN Rail Mounting Type  | TH35-15, TH35-7.5 |
| Connector Mounting Type | DIN Rail          |

Housing Features

|                  |           |
|------------------|-----------|
| Housing Material | Polyamide |
|------------------|-----------|

Dimensions

|                                                                     |                  |
|---------------------------------------------------------------------|------------------|
| Main Circuit Capacity - Twin Ferrule per Spring Clamp               | 20 – 12 AWG      |
| Product Depth                                                       | 82.5 mm          |
| Tool Size                                                           | 4 mm[.157 in]    |
| Wire Stripping Length                                               | 15 mm[.591 in]   |
| Main Circuit Capacity - 1 Rigid Stranded Conductor per Spring Clamp | 20 – 6 AWG       |
| Main Circuit Capacity - 1 Non-Insulated Ferrule per Spring Clamp    | 20 – 8 AWG       |
| Main Circuit Capacity - 1 Insulated Ferrule per Spring Clamp        | 20 – 8 AWG       |
| Main Circuit Capacity - 1 Flexible Conductor per Spring Clamp       | .5 – 10 mm²      |
| Product Length                                                      | 82.5 mm[3.25 in] |
| Product Height                                                      | 47.5 mm          |
| Product Spacing                                                     | 12 mm[.472 in]   |

Usage Conditions

|                                |                            |
|--------------------------------|----------------------------|
| Installation Temperature Range | -5 – 40 °C[23 – 104 °F]    |
| Operating Temperature Range    | -55 – 110 °C[-67 – 230 °F] |

Industry Standards

|                        |          |
|------------------------|----------|
| IP Rating              | IP20     |
| UL Flammability Rating | UL 94V-0 |

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

|                              |           |
|------------------------------|-----------|
| EU RoHS Directive 2011/65/EU | Compliant |
|------------------------------|-----------|



|                                               |                                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                       |
| China RoHS 2 Directive MIIT Order No 32, 2016 | 有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2025 (250)<br>Candidate List Declared Against: JUNE 2025 (250)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                                |
| Solder Process Capability                     | Not reviewed for solder process capability                                                                                      |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1SNK912305R0000  
JB12-5



TE Part # 1SNK900611R0000  
UMH



TE Part # 1SNK900002R0000  
BAZ1



TE Part # 1SNK912303R0000  
JB12-3



TE Part # 1SNK900107R0000  
CS-R3



TE Part # 1SNK912302R0000  
JB12-2



TE Part # 1SNK160000R0000  
MC812



TE Part # 1SNK169999R0000  
MC812PA





TE Part # 1SNK900205R0000

TP4



TE Part # 1SNK900203R0000

TP2

Also in the Series | ENTRELEC SNK



Modular Terminal Blocks(319)



Terminal Block & Strip Conducting Accessories(67)



Terminal Block & Strip Insulating Accessories(31)

Customers Also Bought




TE Part #H1111000301-000

HPC-200-050-F-P-OR-01



TE Part #H101100030A-000

HPC-125/200/250-M-R-OR-01

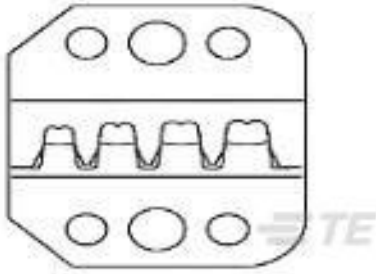

TE Part #58628-2

PROCRMP DIESET 26-14 ULTRAFAST



TE Part #202507-1

CONTACT PIN ASSY.



TE Part #202508-1

CONTACT SOCKET ASSY.



TE Part #211398-1

CPC RECPT. SIZE 13-7



TE Part #211400-1

CPC PLUG ASSEMBLY SIZE 13-7



TE Part #1462041-6

IMB06CTS=IM RELAY 140mW12V HDV



TE Part #6-1625984-5

HSA50 50K 5%



TE Part #3-1630027-9

HSC300 R22 5%



Documents

Product Drawings

ZK10-PV

English

CAD Files

Customer View Model

ENG\_CVM\_CVM\_1SNK710063R0000\_A2.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1SNK710063R0000\_A2.3d\_stp.zip

English

Customer View Model

ENG\_CVM\_CVM\_1SNK710063R0000\_A2.2d\_dxf.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

ZK10-PV

English

ENTRELEC Terminal Block - Master Catalog

ENTRELEC Terminal Block - Master Catalog

English

SNK SERIES TERMINAL BLOCKS

English

Agency Approvals

UL

English