

MBK BU - Mini feed-through terminal block



1401093
<https://www.phoenixcontact.com/us/products/1401093>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Mini feed-through terminal block, nom. voltage: 500 V, nominal current: 17.5 A, number of connections: 2, connection method: Screw connection, 1 level, Rated cross section: 1.5 mm², cross section: 0.2 mm² - 2.5 mm², mounting type: NS 15, color: blue

Your advantages

- MBK ... mini strip terminal blocks and their variants represent the original, typical shape of the MBK ... range
- Clear arrangement thanks to marking of all terminal points
- Space saving thanks to compact design and mounting option on a 15 mm DIN rail
- Easy potential distribution thanks to standardized plug-in bridges

Commercial data

Item number	1401093
Packing unit	200 pc
Minimum order quantity	200 pc
Sales key	BE12
Product key	BE1261
Catalog page	Page 520 (CL1-2011)
GTIN	4017918020200
Weight per piece (including packing)	4.34 g
Weight per piece (excluding packing)	4.121 g
Customs tariff number	85369010
Country of origin	DE

MBK BU - Mini feed-through terminal block



1401093

<https://www.phoenixcontact.com/us/products/1401093>

Technical data

Product properties

Product type	Miniature terminal block
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	0.56 W

Connection data

Number of connections per level	2
Nominal cross section	1.5 mm ²

1 level

Screw thread	M2,6
Tightening torque	0.5 ... 0.6 Nm
Stripping length	8 mm
Internal cylindrical gage	A1
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section rigid	0.2 mm ² ... 2.5 mm ²
Cross section AWG	24 ... 14 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm ² ... 1.5 mm ²
Conductor cross section, flexible [AWG]	24 ... 16 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm ² ... 1.5 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.25 mm ² ... 1 mm ²
Cross-section with insertion bridge, rigid	1.5 mm ²
Cross-section with insertion bridge, flexible	1.5 mm ²
2 conductors with same cross section, solid	0.2 mm ² ... 0.75 mm ²
2 conductors with same cross section, flexible	0.2 mm ² ... 1 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.25 mm ² ... 0.5 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 0.75 mm ²
Nominal current	17.5 A
Maximum load current	24 A (with a 2.5 mm ² conductor cross section)
Nominal voltage	500 V
Nominal cross section	1.5 mm ²

MBK BU - Mini feed-through terminal block



1401093

<https://www.phoenixcontact.com/us/products/1401093>

Dimensions

Width	5 mm
-------	------

Material specifications

Color	blue
Flammability rating according to UL 94	V2
Insulating material group	I
Insulating material	PA
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Relative insulation material temperature index (Elec., UL 746 B)	125 °C

Electrical tests

Surge voltage test

Test voltage setpoint	7.3 kV
Result	Test passed

Temperature-rise test

Requirement temperature-rise test	Increase in temperature ≤ 45 K
Result	Test passed
Short-time withstand current 1.5 mm ²	0.18 kA
Short-time withstand current 2.5 mm ²	0.3 kA
Result	Test passed

Power-frequency withstand voltage

Test voltage setpoint	1.89 kV
Result	Test passed

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Mechanical tests

Mechanical strength

Result	Test passed
--------	-------------

Attachment on the carrier

DIN rail/fixing support	NS 15
Test force setpoint	1 N
Result	Test passed

Test for conductor damage and slackening

Rotation speed	10 rpm
Revolutions	135

MBK BU - Mini feed-through terminal block



1401093

<https://www.phoenixcontact.com/us/products/1401093>

Conductor cross section/weight	0.2 mm ² / 0.2 kg
	1.5 mm ² / 0.4 kg
	2.5 mm ² / 0.7 kg
Result	Test passed

Environmental and real-life conditions

Needle-flame test

Time of exposure	30 s
Result	Test passed

Ambient conditions

Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

Mounting


Mounting type	NS 15
---------------	-------

MBK BU - Mini feed-through terminal block

1401093

<https://www.phoenixcontact.com/us/products/1401093>

Drawings

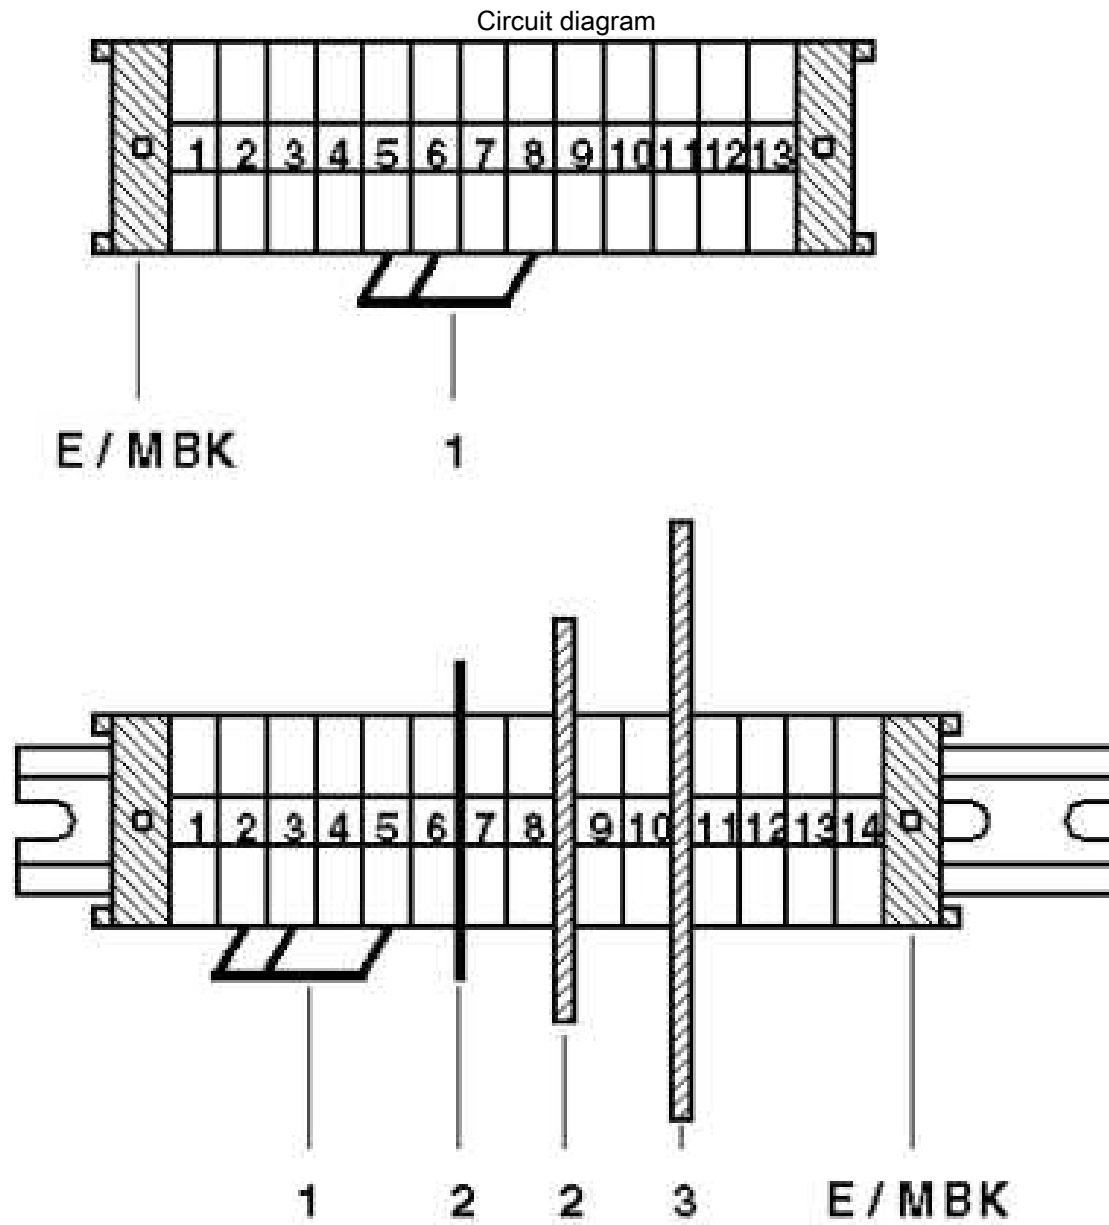

MBK BU - Mini feed-through terminal block



1401093

<https://www.phoenixcontact.com/us/products/1401093>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1401093>



EAC

Approval ID: RU C-DE.BL08.B.00534

MBK BU - Mini feed-through terminal block



1401093

<https://www.phoenixcontact.com/us/products/1401093>

Classifications

ECLASS

ECLASS-11.0	27141120
ECLASS-13.0	27250101

ETIM

ETIM 8.0	EC000897
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

MBK BU - Mini feed-through terminal block



1401093

<https://www.phoenixcontact.com/us/products/1401093>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

MBK BU - Mini feed-through terminal block

1401093

<https://www.phoenixcontact.com/us/products/1401093>



Accessories

i Note: Applying some accessories below might limit this product.

EB 3- 5 - Insertion bridge

1401145

<https://www.phoenixcontact.com/us/products/1401145>

Insertion bridge, pitch: 5 mm, number of positions: 3, color: gray



i Max. current carrying capacity: 24 A

EB 10- 5 - Insertion bridge

1401132

<https://www.phoenixcontact.com/us/products/1401132>

Insertion bridge, pitch: 5.2 mm, number of positions: 10, color: gray



i Max. current carrying capacity: 24 A

MBK BU - Mini feed-through terminal block

1401093

<https://www.phoenixcontact.com/us/products/1401093>



EB 2- 5 - Insertion bridge

1401158

<https://www.phoenixcontact.com/us/products/1401158>

Insertion bridge, pitch: 5 mm, number of positions: 2, color: gray



 Max. current carrying capacity: 24 A

TP-BK/MBK - Separating plate

0801791

<https://www.phoenixcontact.com/us/products/0801791>

Separating plate, width: 2 mm, height: 42 mm, color: gray



MBK BU - Mini feed-through terminal block

1401093

<https://www.phoenixcontact.com/us/products/1401093>



ATP-MBK - Partition plate

1413227

<https://www.phoenixcontact.com/us/products/1413227>



Partition plate, depth: 30.5 mm, width: 2.5 mm, height: 42.5 mm, color: gray

BN WH - Marker for terminal blocks

1401404

<https://www.phoenixcontact.com/us/products/1401404>



Marker for terminal blocks, Stud, white, unlabeled, can be labeled with: Marker pen, mounting type: plug in, for terminal block width: 4.2 mm, lettering field size: 4 x 4 mm

MBK BU - Mini feed-through terminal block



1401093

<https://www.phoenixcontact.com/us/products/1401093>

SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/us/products/1205053>



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

ATS-MBK - Separating plate

1402225

<https://www.phoenixcontact.com/us/products/1402225>



Separating plate, width: 0.5 mm, height: 26.6 mm, color: gray

MBK BU - Mini feed-through terminal block

1401093

<https://www.phoenixcontact.com/us/products/1401093>



BN-ZB 5,2/WH CUS - Marker pin Zack strip

0824271

<https://www.phoenixcontact.com/us/products/0824271>



Marker pin Zack strip, Strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: plug in, for terminal block width: 5.2 mm, lettering field size: 4 x 4 mm, Number of individual labels: 10

NS 15 UNPERF 2000MM VPE 10 - DIN rail, unperforated

1401695

<https://www.phoenixcontact.com/us/products/1401695>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

MBK BU - Mini feed-through terminal block



1401093

<https://www.phoenixcontact.com/us/products/1401093>

NS 15 PERF 2000MM VPE 10 - DIN rail perforated

1401682

<https://www.phoenixcontact.com/us/products/1401682>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 15 AL PERF 2000MM VPE 10 - DIN rail perforated

1401763

<https://www.phoenixcontact.com/us/products/1401763>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

MBK BU - Mini feed-through terminal block

1401093

<https://www.phoenixcontact.com/us/products/1401093>



NS 15 WH PERF 2000MM-VPE 10 - DIN rail perforated

1204096

<https://www.phoenixcontact.com/us/products/1204096>




DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

E/MBK - End bracket

1401637

<https://www.phoenixcontact.com/us/products/1401637>



End clamp, width: 6.2 mm, color: gray

MBK BU - Mini feed-through terminal block

1401093

<https://www.phoenixcontact.com/us/products/1401093>



E/MK - End bracket

1421633

<https://www.phoenixcontact.com/us/products/1421633>

End clamp, width: 6.2 mm, color: gray




E/MK 1 - End bracket

1421659

<https://www.phoenixcontact.com/us/products/1421659>

End clamp width: 6 mm, color: gray



Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com