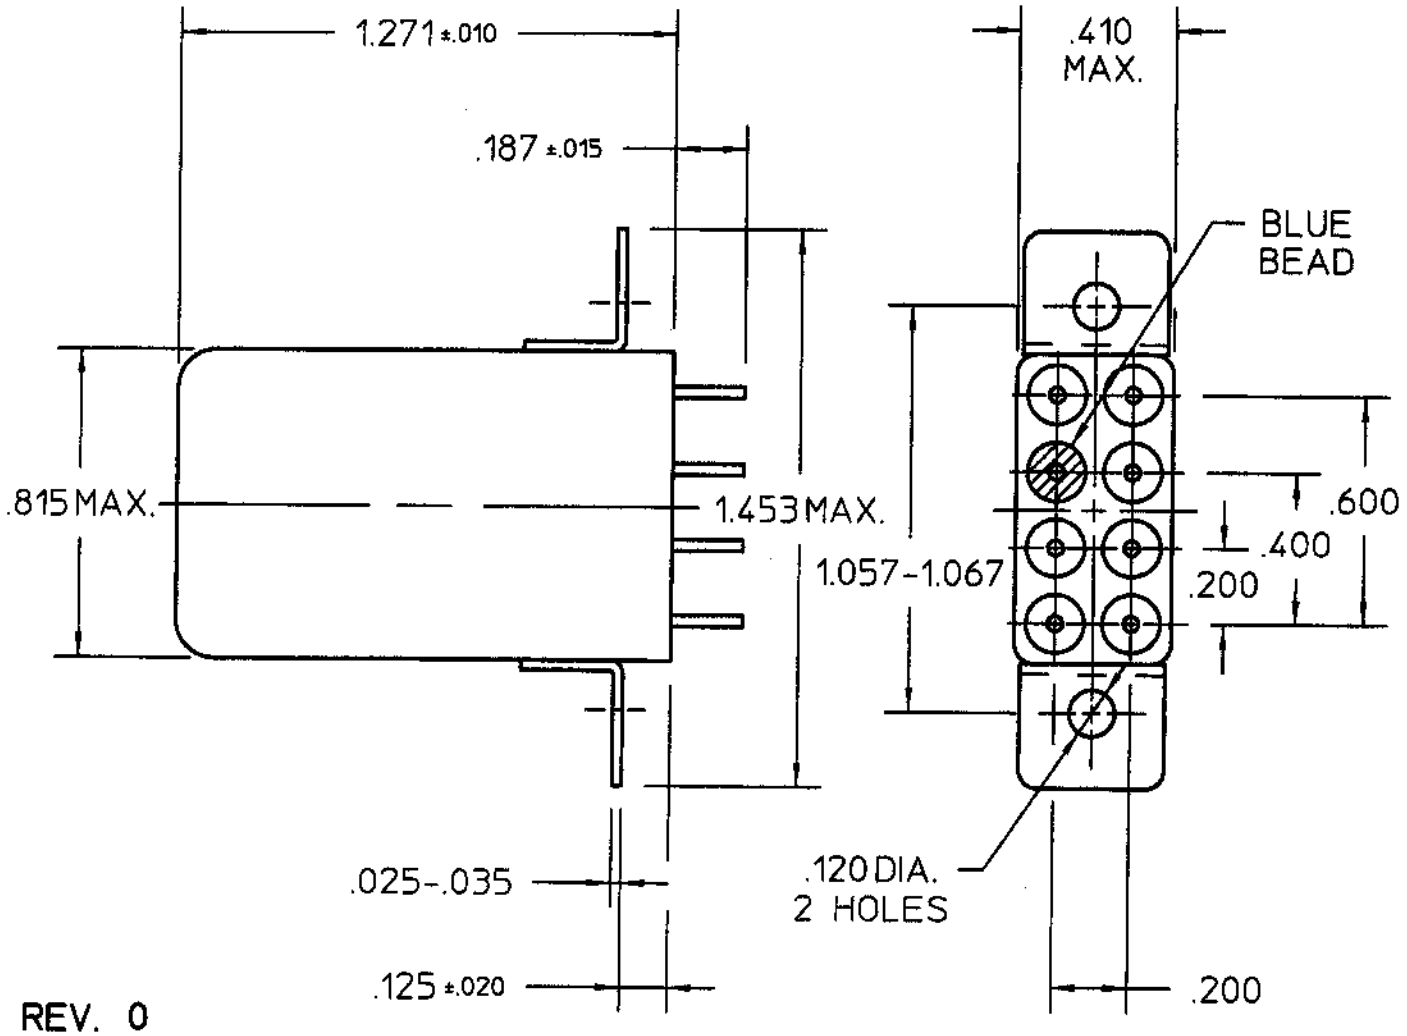


REV. 0

DCO 170424

COIL: @ 25°C

RESISTANCE 2500 OHMS

NOMINAL VOLTAGE 8.0 mADC

MUST OPERATE 4.0 mADC

MUST RELEASE 2.0 mADC MAX, 0.40 mADC MIN

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 15 g's

SHOCK 100 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 15 MS MAX

RELEASE 10 MS MAX

CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

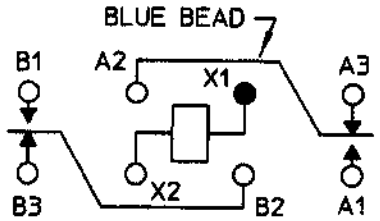

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 3/05/01 | CK. TLG 3-5-01

CII Technologies
advanced control electronic solutions

CUST. QPL

CUST. NO. M5757/13-100 REV.

3SAT RELAY

3SAT1317A2

F-718 REV 3