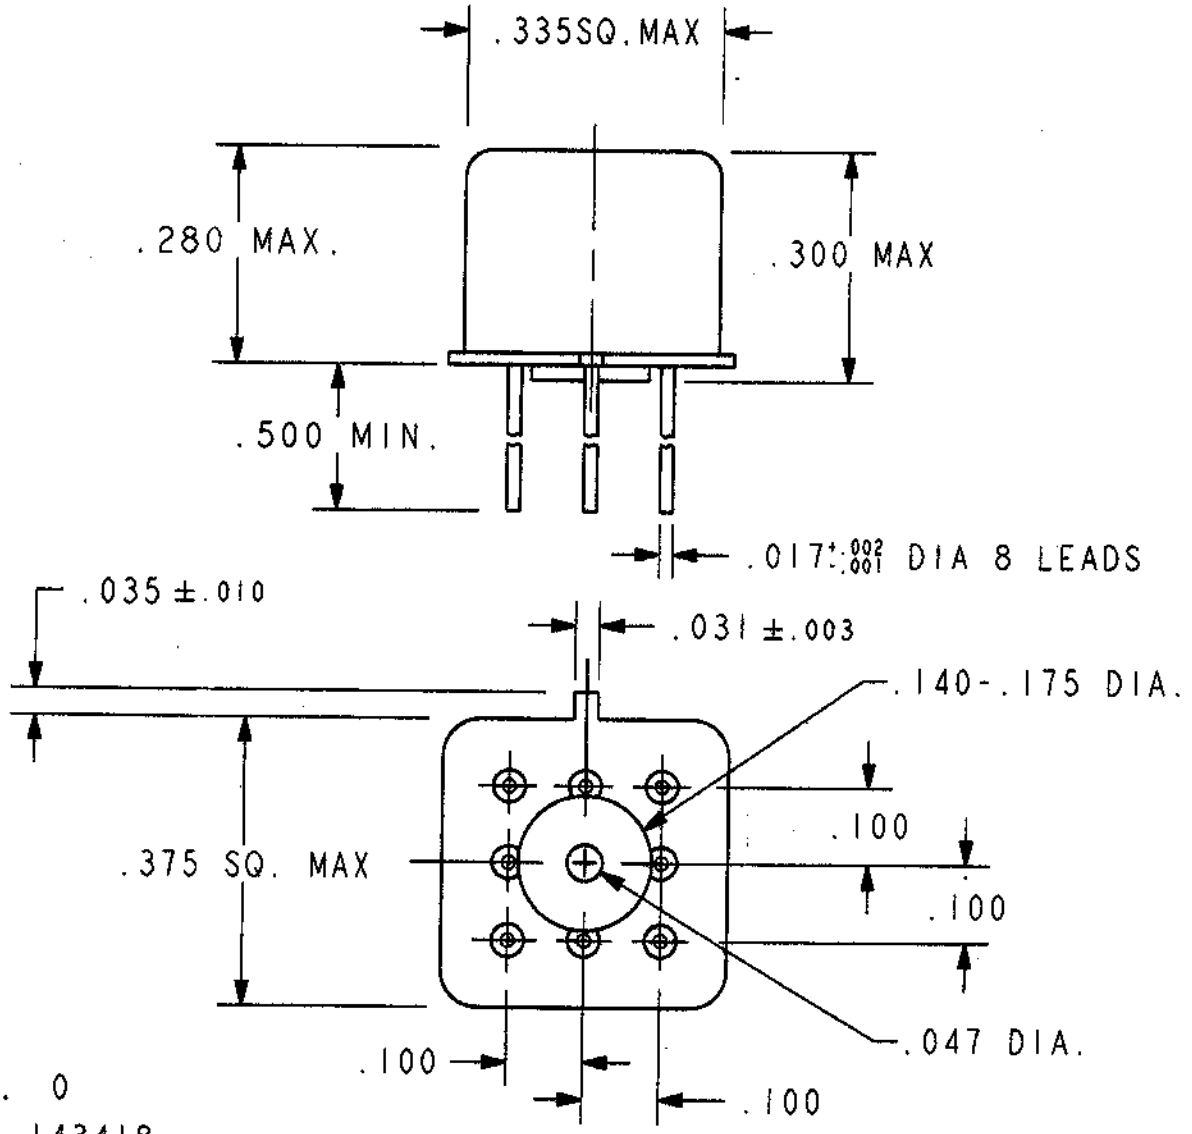



REV. 0
DCO 143418

COIL: @ 25°C

RESISTANCE 880 OHMS ±10%

NOMINAL VOLTAGE 18.0 VDC

MUST OPERATE 10.5 VDC

MUST RELEASE 6.0 VDC MAX, 0.91 VDC MIN.

ENVIRONMENT:


VIBRATION 10 Hz TO 3000 Hz @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX
RELEASE TIME 4.0 MS MAX
CONTACT STABILIZATION 2.5 MS MAX

## CUSTOMER DATA SHEET




TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS

DR. ASB 01/21/02 | CK [signature] 1/21/02

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M39016/18-041P REV.

"JMGAD" RELAY

# JMGACD-18PW

F-718 REV. 4