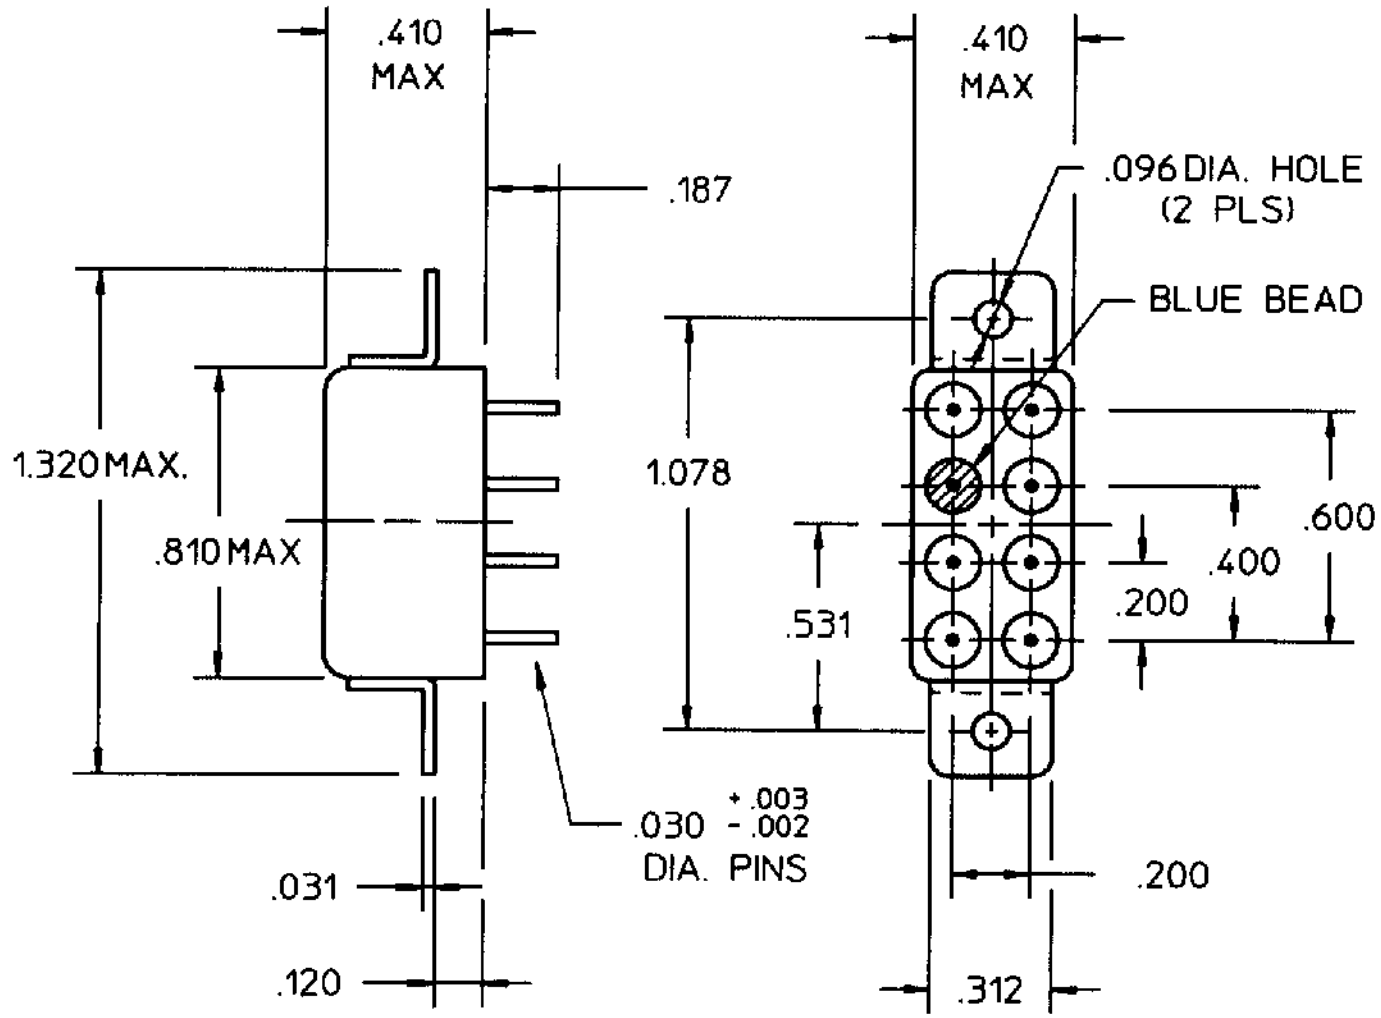


COIL: @ +25 °C

RESISTANCE	700 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	1.5 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 4 MS MAX.
RELEASE 2 MS MAX.
BOUNCE 3 MS MAX.

CUSTOMER DATA SHEET

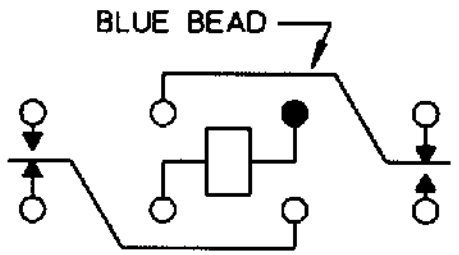

CONTACT RATING: LOW LEVEL TO 2A 30 VDC RESISTIVE 100,000 OPERATIONS MIN.

DR. R.B. 5/19/92 CK. 5/20/92 JMB

COMMUNICATIONS INSTRUMENTS, INC.

CUST. HI-G
CUST. NO. 2K-2C-126

TYPE "HFW" RELAY

HFW1240S01