

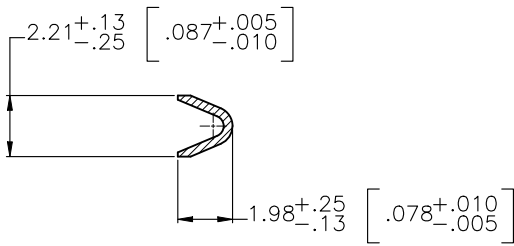
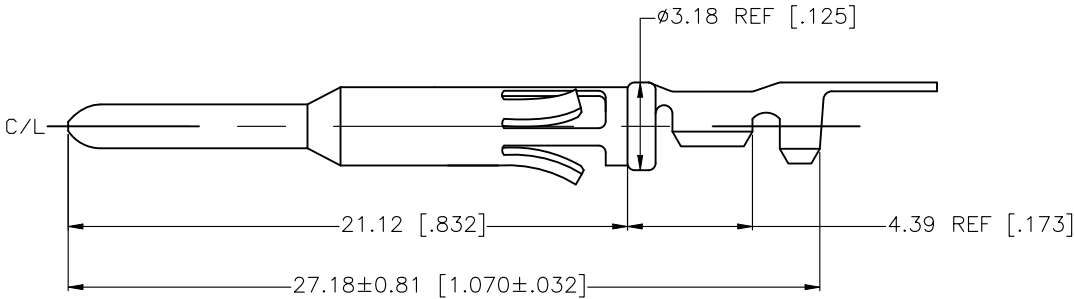



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H	REVISED PER ECR-24-213591	28JUN2024	RK	FJS

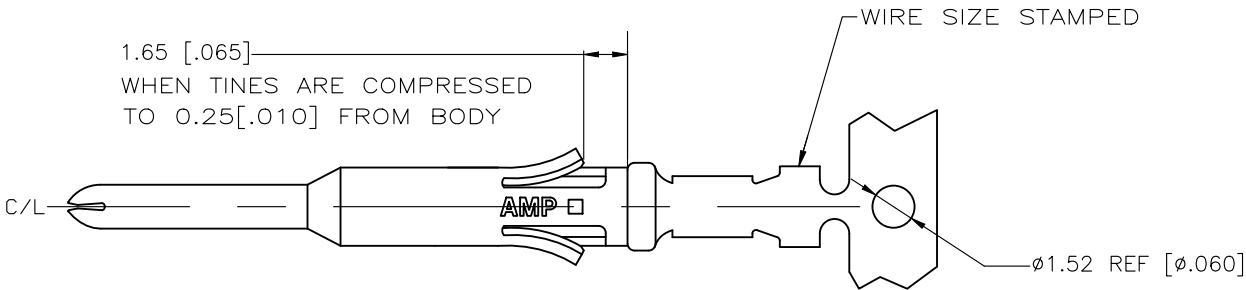

SECTION B-B

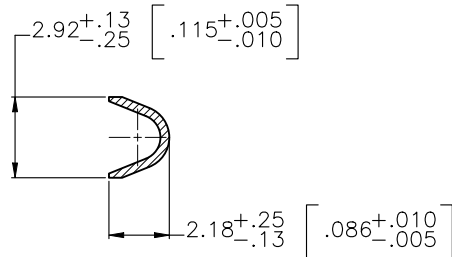

SECTION A-A

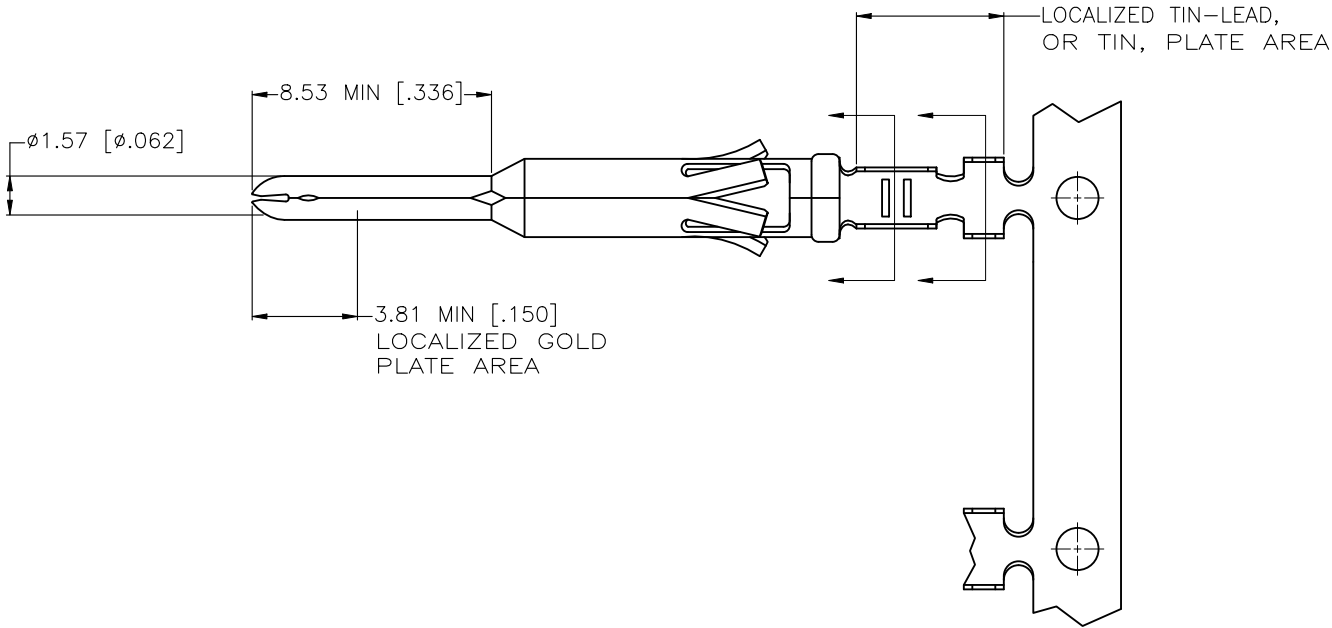

- WIRE RANGE 24-20 AWG.
 - INSULATION RANGE 1.02-2.03[.040-.080] DIA.
 - FOR LOOSE PIECE PART SEE DWG 66593.
- ⚠ 0.76µm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA,
1.27µm [.000050] MIN TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA,
BOTH OVER 1.27µm [.000050] MIN NICKEL.
- ⚠ TIN PLATED.
- ⚠ GOLD PLATING PER MIL-G-45204, TIN PER MIL-T-10727 AND NICKEL PER QQ-N-290.
- ⚠ 0.76µm [.000030] MIN GOLD IN LOCALIZED PRECIOUS METAL PLATE PLATE AREA,
1.27µm [.000050] MIN TIN IN LOCALIZED TIN PLATE AREA,
BOTH OVER 1.27µm [.000050] MIN NICKEL.
CONFORMS TO THE REQUIREMENTS OF TE PRODUCT SPEC 108-10042,
BASED ON EIA-364-1000.01 (CONTROLLED ENVIRONMENT APPLICATIONS).

OBsolete

REVERSE REELED FOR MINI-APPLICATOR	⚠	1-66583-0
REVERSE REELED FOR MINI-APPLICATOR	⚠	66583-4
-	⚠	66583-3
REVERSE REELED FOR MINI-APPLICATOR	⚠	66583-2
-	⚠	66583-1
DESCRIPTION	FINISH	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± -
MATERIAL BRASS MIL-C-50	FINISH SEE TABLE

DWN V. FURLER 16MAY2003	TE Connectivity			
CHK G. STEINHAUER 16MAY03				
APVD G. STEINHAUER 16MAY03	NAME CONTACT, PIN, STRIP, TYPE VI, MULTIMATE			
PRODUCT SPEC -	SIZE A3	CAGE CODE 00779	DRAWING NO C-66583	RESTRICTED TO -
APPLICATION SPEC -				
WEIGHT -				
CUSTOMER DRAWING			SCALE NTS	SHEET 1 OF 1
			REV H	