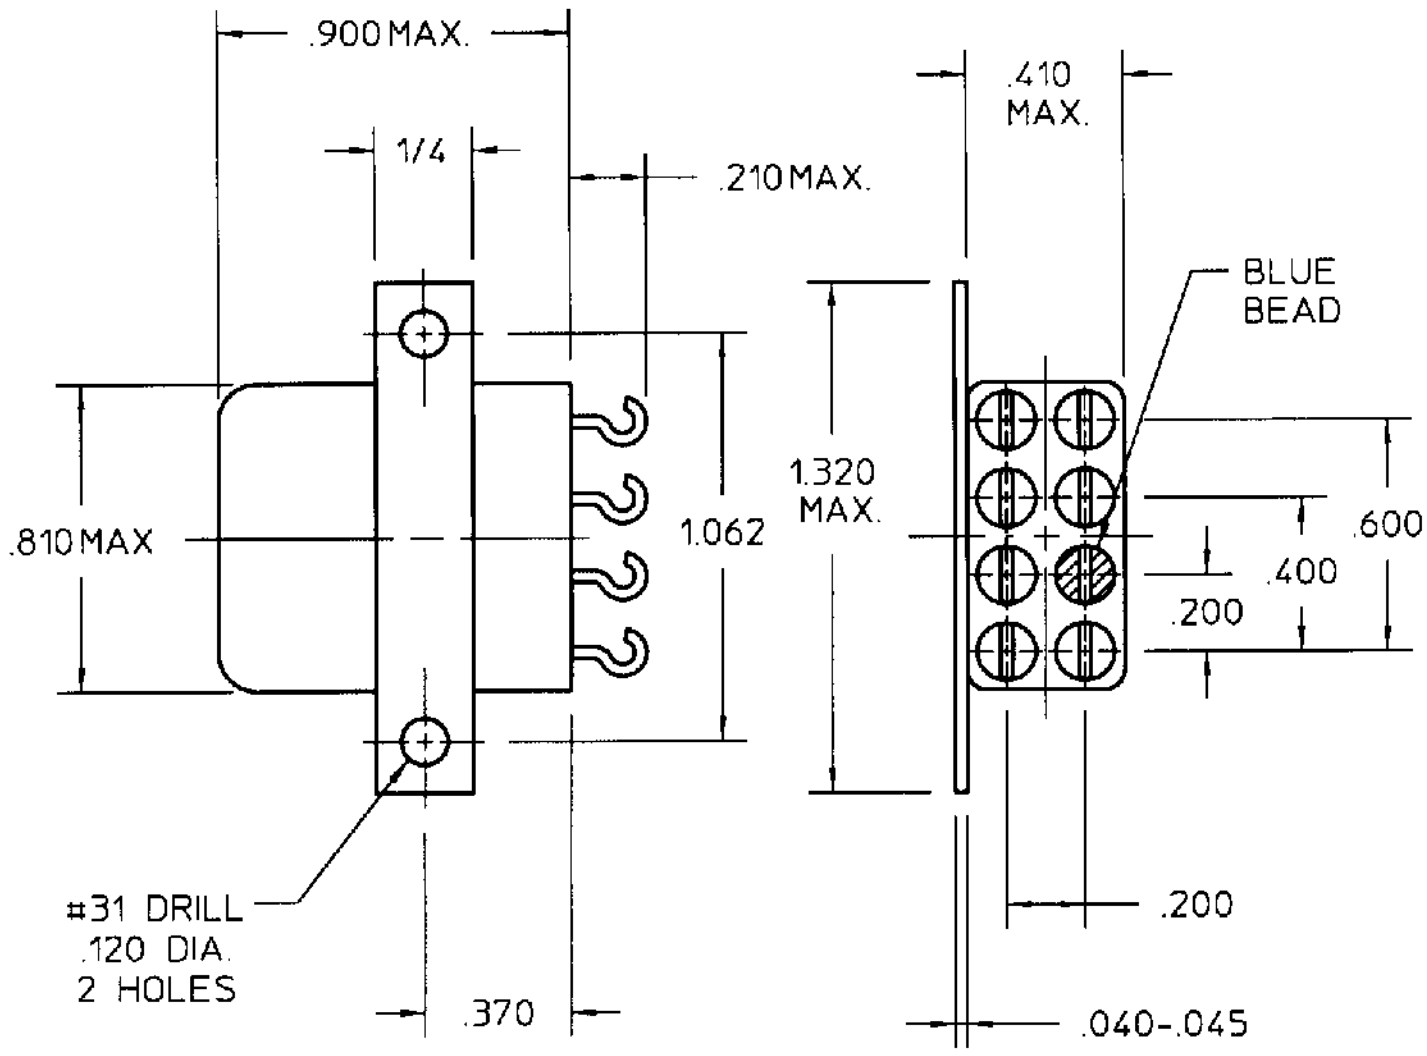


COIL: @ +25° C

RESISTANCE	2000 OHMS ± 10%
NOMINAL VOLTAGE	18.0 VDC
MUST OPERATE	4.5 mADC
MUST RELEASE	0.50 mADC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 15 MS MAX (HI-G IS 8 MS)
RELEASE 10 MS MAX (HI-G IS 4 MS)
CONTACT BOUNCE 3 MS MAX

CUSTOMER DATA SHEET

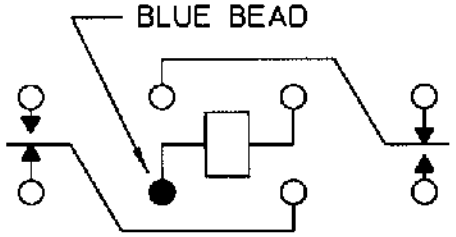

CONTACT RATING: LOW LEVEL TO 2 AMPS
30 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 2/20/98 CK 2/20/98

COMMUNICATIONS INSTRUMENTS, INC.

CUST. HI-G
CUST. NO. 28K-18-118

TYPE "SF" RELAY

SF6193H01