FEI Part Number	Dimension A in. (mm) +/- .250" (6.35)	B / C Max.	Stud Size D +/- .003	Stud Size E +/-.003	FEI Part Number	Dimension A in. (mm) +/- .250" (6.35)	B Max.	C Max.	Stud Size D +/- .003	Stud Size E +/-.003	FEI Part Number	Dimension A in. (mm) +/- .250" (6.35)	B / C Max.	Stud Size D +/- .003	Stud Size E +/-.003
3/4-01-004FB	4.0 (101.6)	.485"/(12.32)	.265 (6.73)	.265 (6.73)	3/4-02-004FB	4.0 (101.6)	.483 (12.26)	.837 (21.26)	.265 (6.73)	.515 (13.08)	3/4-03-004FB	4.0 (101.6)	.837 (21.26)	.515 (13.08)	.515 (13.08)
3/4-01-008FB	8.0 (203.2)	.485"/(12.32)	.265 (6.73)	.265 (6.73)	3/4-02-008FB	8.0 (203.2)	.483 (12.26)	.837 (21.26)	.265 (6.73)	.515 (13.08)	3/4-03-008FB	8.0 (203.2)	.837 (21.26)	.515 (13.08)	.515 (13.08)
3/4-01-012FB	12.0 (304.8)	.485"/(12.32)	.265 (6.73)	.265 (6.73)	3/4-02-012FB	12.0 (304.8)	.483 (12.26)	.837 (21.26)	.265 (6.73)	.515 (13.08)	3/4-03-012FB	12.0 (304.8)	.837 (21.26)	.515 (13.08)	.515 (13.08)
3/4-01-016FB	16.0 (406.4)	.485"/(12.32)	.265 (6.73)	.265 (6.73)	3/4-02-016FB	16.0 (406.4)	.483 (12.26)	.837 (21.26)	.265 (6.73)	.515 (13.08)	3/4-03-016FB	16.0 (406.4)	.837 (21.26)	.515 (13.08)	.515 (13.08)
3/4-01-020FB	20.0 (508)	.485"/(12.32)	.265 (6.73)	.265 (6.73)	3/4-02-020FB	20.0 (508)	.483 (12.26)	.837 (21.26)	.265 (6.73)	.515 (13.08)	3/4-03-020FB	20.0 (508)	.837 (21.26)	.515 (13.08)	.515 (13.08)
3/4-01-024FB	24.0 (609.6)	.485"/(12.32)	.265 (6.73)	.265 (6.73)	3/4-02-024FB	24.0 (609.6)	.483 (12.26)	.837 (21.26)	.265 (6.73)	.515 (13.08)	3/4-03-024FB	24.0 (609.6)	.837 (21.26)	.515 (13.08)	.515 (13.08)

Specifications subject to change without notice

1 AA59569F36T0781 Flat Braided Cable Specifications: (subject to change without notice)

AWG Size 7
Nom. Circular Area (Mils) 21600
Nom. Thick. (in) 0.040
Amps 88
F Braid 3/4

Construction 48-18-36
Nom. Flat Width (in) 3/4
Approx LBS/MFT 75.00
Cond. Material Tinned Copper

2 Terminal Specifications:

1.MATERIAL:COPPER
.050/(1.27) THICK REF.
PLATING : ELECTRO TIN

2.MATERIAL:COPPER
.057/(1.45) THICK REF.
PLATING : ELECTRO TIN

10" Pull Standard

3 Solder option

All ground straps are RoHs compliant unless otherwise specified

*63/37 solder available by request

3 Heat Shrink Option

Polyolefin Heat Shrink

Color:Black, Green other colors available by request

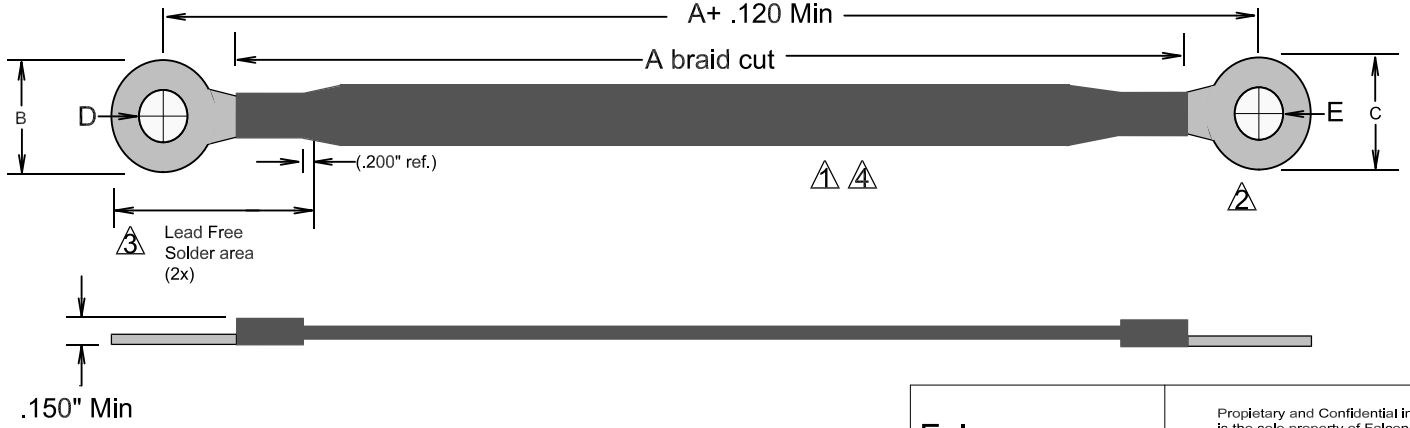

For customer use only

Falconer Electronics, Inc

Product Drawing

General Tol. Unless noted

+/-.250"

All Dim. Inches

Propietary and Confidential information contained in this drawn is the sole property of Falconer Electronics, Inc. Any reproduction in part or as a whole without the written permission of Falconer Electronics, Inc is prohibited

TITLE: Braided Ground Strap Straight .750 Series Insulated

SIZE	CAGE CODE	DWG NO	REV
B		750LL024007	

SCALE N/A | 10/07/24 | SHEET