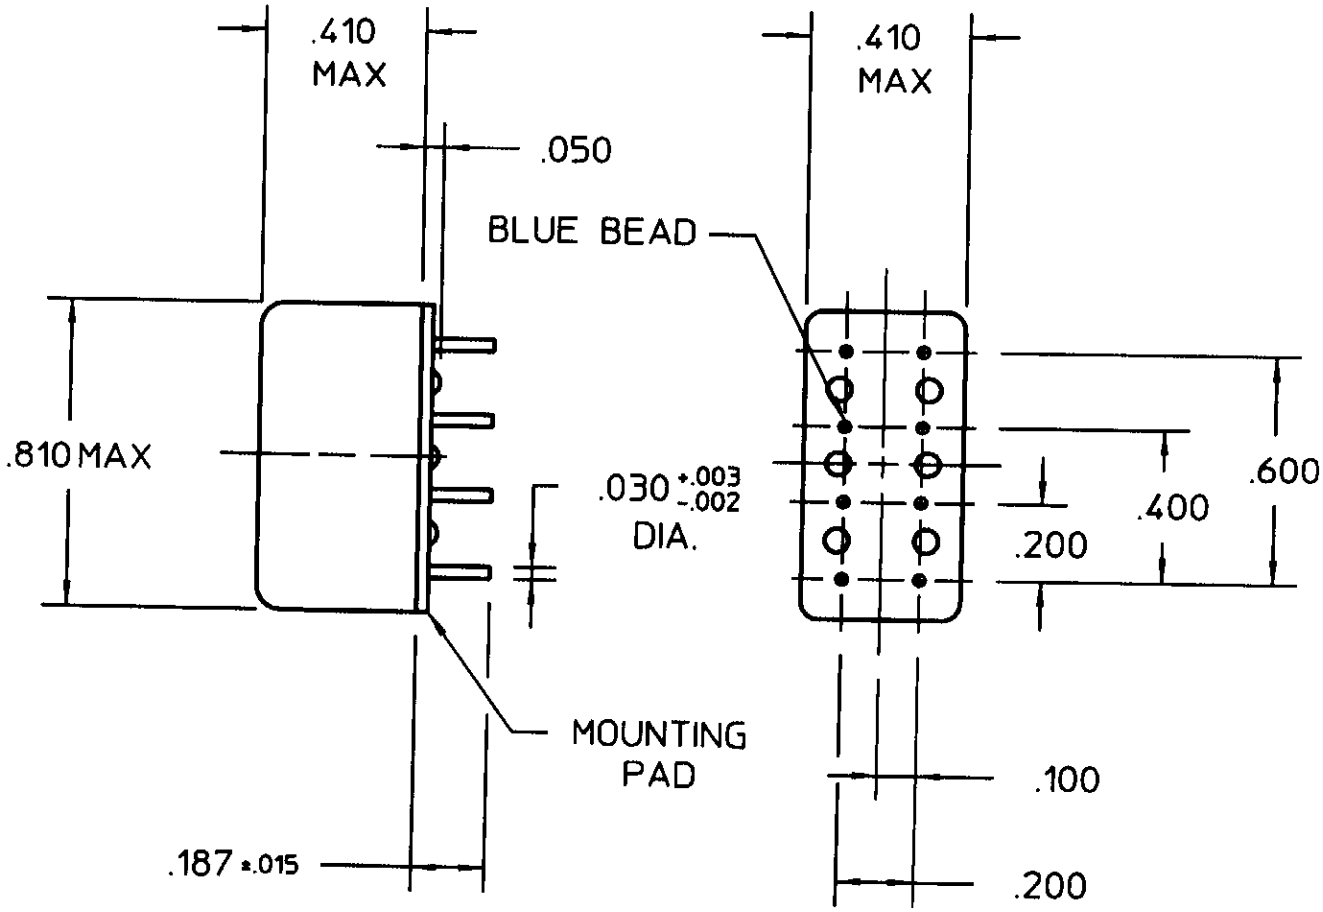


COIL: @ +25 °C

RESISTANCE	2070 OHMS ± 10%
NOMINAL VOLTAGE	24.0 VDC
MUST OPERATE	17.5 VDC
MUST RELEASE	1.4 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 500 CPS @ 10 g's

SHOCK 30 g's 6 MS. DURATION

TEMPERATURE -55 °C TO +85 °C

NOTES: OPERATE 6 MS MAX.
RELEASE 4 MS MAX.

CUSTOMER DATA SHEET

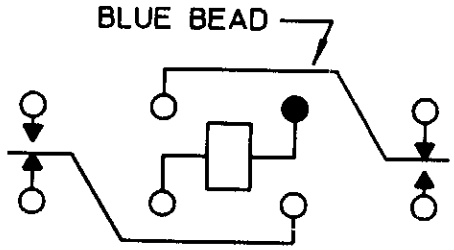

CONTACT RATING: 2 AMPS 30 VDC
RESISTIVE 100,000 OPERATIONS

DR. R.B. 8/30/94 CK. 8/30/94

COMMUNICATIONS INSTRUMENTS, INC.

CUST. HI-G
CUST. NO. FS3-2A-124P

TYPE "HFW" RELAY

HFW1201P303