


SOT-227

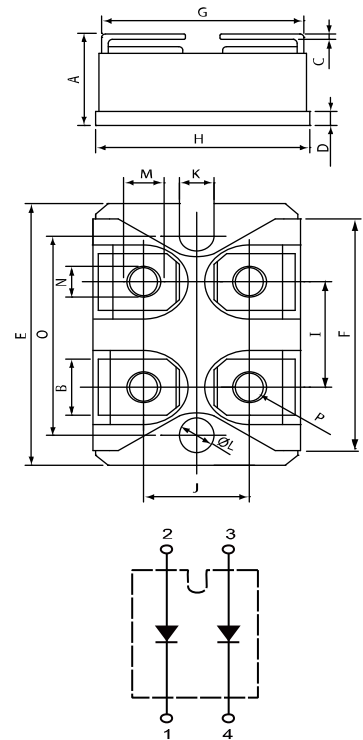

DIM	DIMENSIONS			
	INCHES		MM	
	MIN	MXA	MIN	MXA
A	.500	.519	12.70	13.20
B	.307	.322	7.80	8.20
C	.029	.033	.75	.84
D	.077	.082	1.95	2.10
E	1.487	1.502	37.80	38.20
F	1.250	1.258	31.75	32.00
	.931	.956	23.65	24.30
	.996	1.007	25.30	25.60
	.586	.594	14.90	15.10
	.492	.516	12.50	13.10
	.161	.169	4.10	4.30
	.161	.169	4.10	4.30
	.181	.191	4.60	4.95
	.165	.177	4.20	4.50
	1.184	1.192	30.10	30.30

Pulse Test: Pulse Width 300 μ sec, Duty < 2%

Figure .1- Typical Forward Characteristics

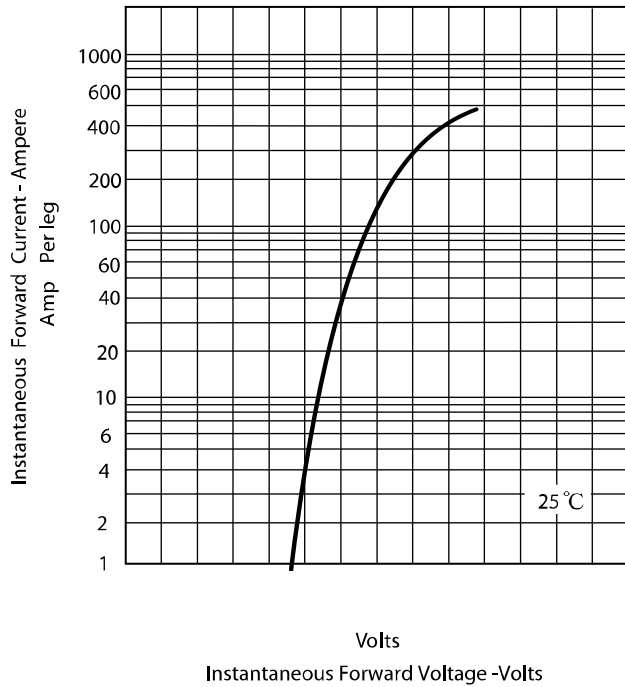


Figure.2 - Forward Derating Curve

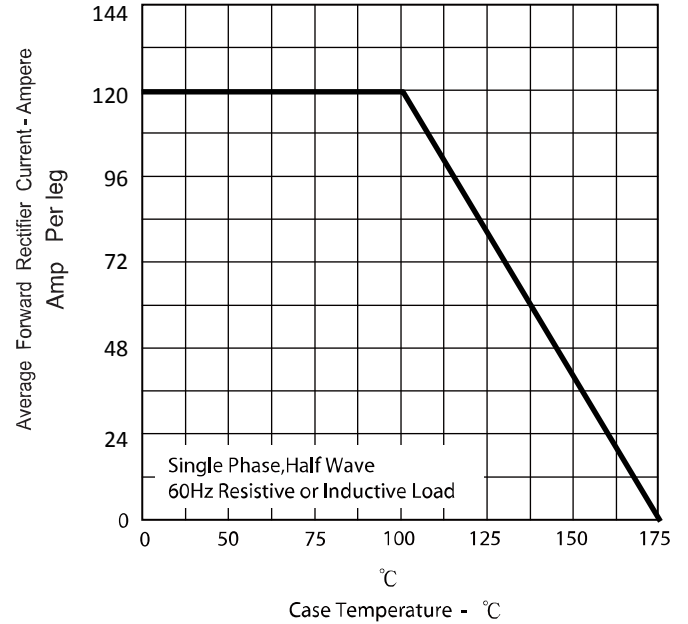


Figure.3 - Peak Forward Surge Current

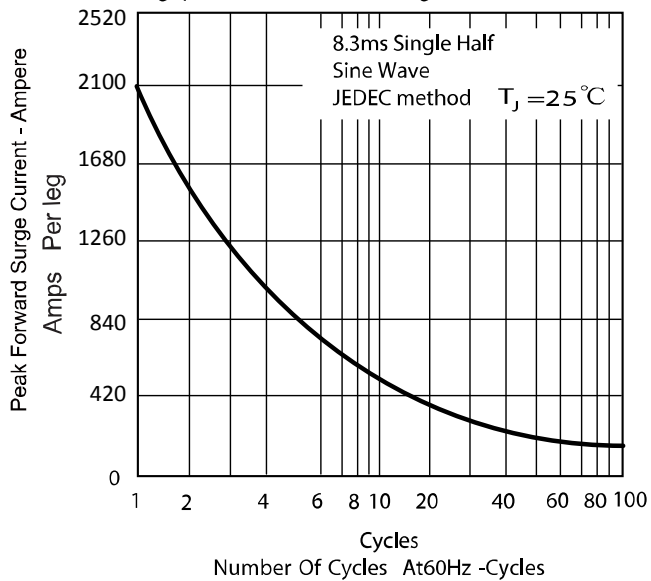


Figure .4 -Typical Reverse Characteristics

