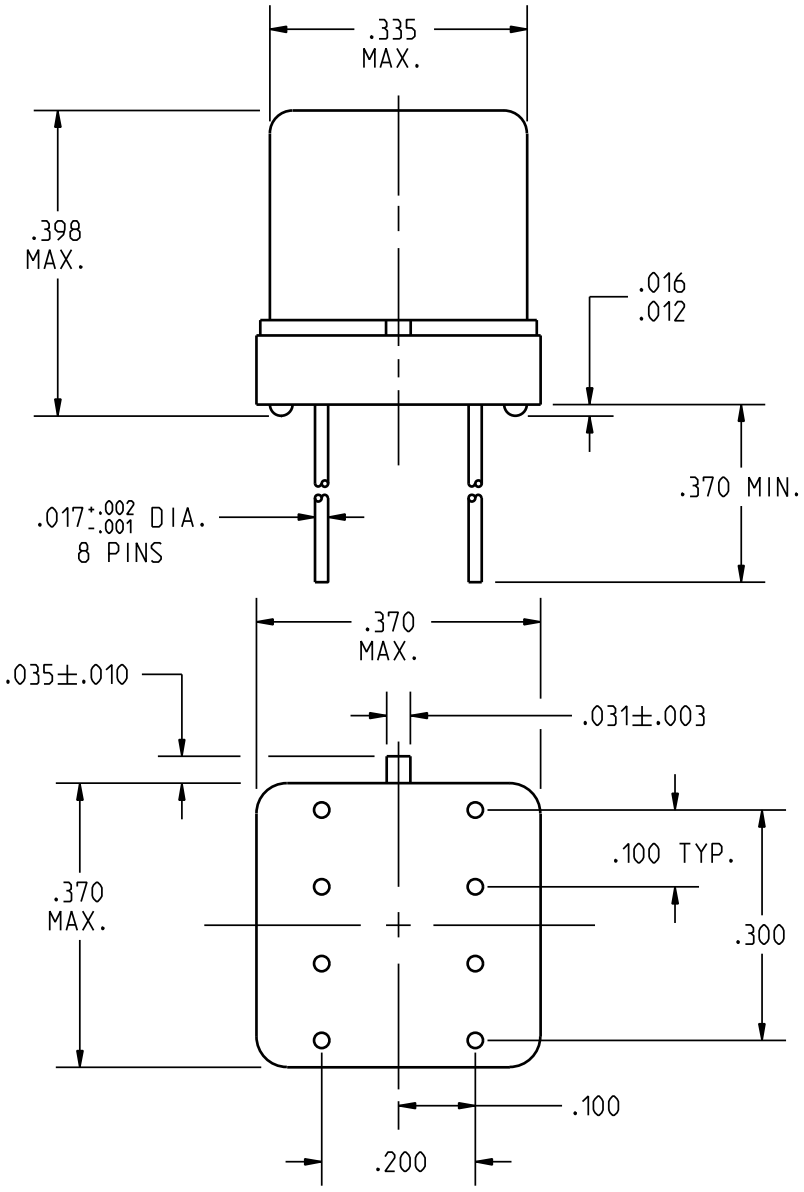


REV. 0
DCO 143868

COIL: @ 25°C

RESISTANCE	390 OHMS ±10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	7.0 VDC
MUST RELEASE	4.0 VDC MAX. 0.63 VDC MIN.

ENVIRONMENT:


VIBRATION 10 Hz TO 3000 Hz @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX
RELEASE TIME 4.0 MS MAX
CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
1A 28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 08APR04 | CK. JERRY C. 4/12/04

CII Technologies™
advanced control electronic solutions

CUST.
CUST. NO. M39016/9-074L REV.

"JMAC" RELAY

JMAC-12XLS