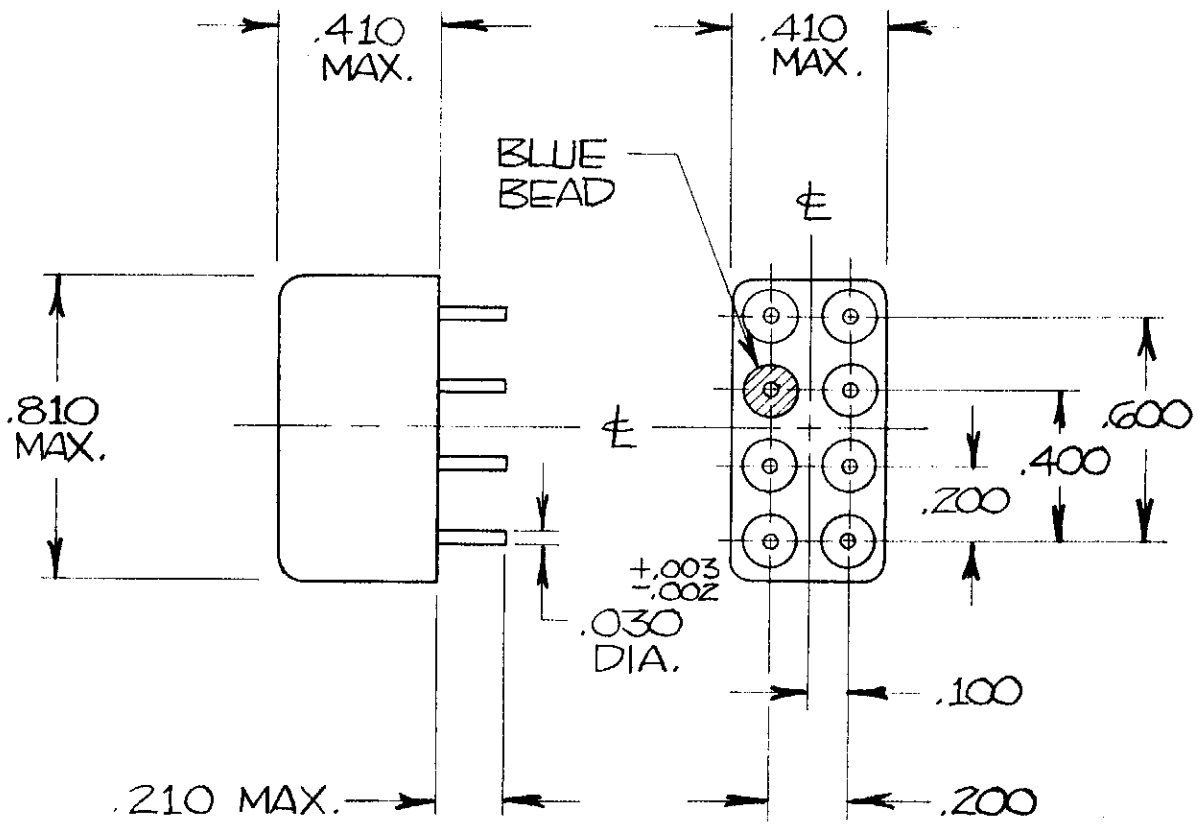


COIL: @ +25°C

RESISTANCE 218 Ω ±10%

NOMINAL VOLTAGE 12 VDC

MUST OPERATE 9.2 VDC

MUST RELEASE —

ENVIRONMENT:

VIBRATION — CPS TO — CPS @ — g's

SHOCK — g's — MS. DURATION

TEMPERATURE -45 °C TO +70 °C


NOTES: OPERATE 5MS mA

RELEASE 3MS mA

500VAC DIELECTRIC ALL POINTS

CUSTOMER DATA SHEET

BLUE BEAD

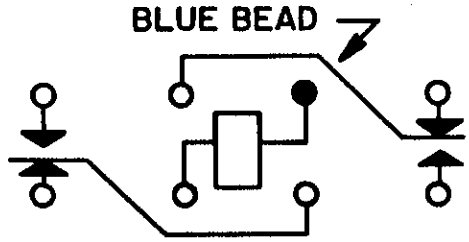

CONTACT RATING: 2 AMPS 28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 4-1-91 CK. 4/1/91 JMB

Communications Instruments, Inc.

CUST. P & B

CUST. NO. HP-11D-12

TYPE "HFW" RELAY

HFW1201S139