


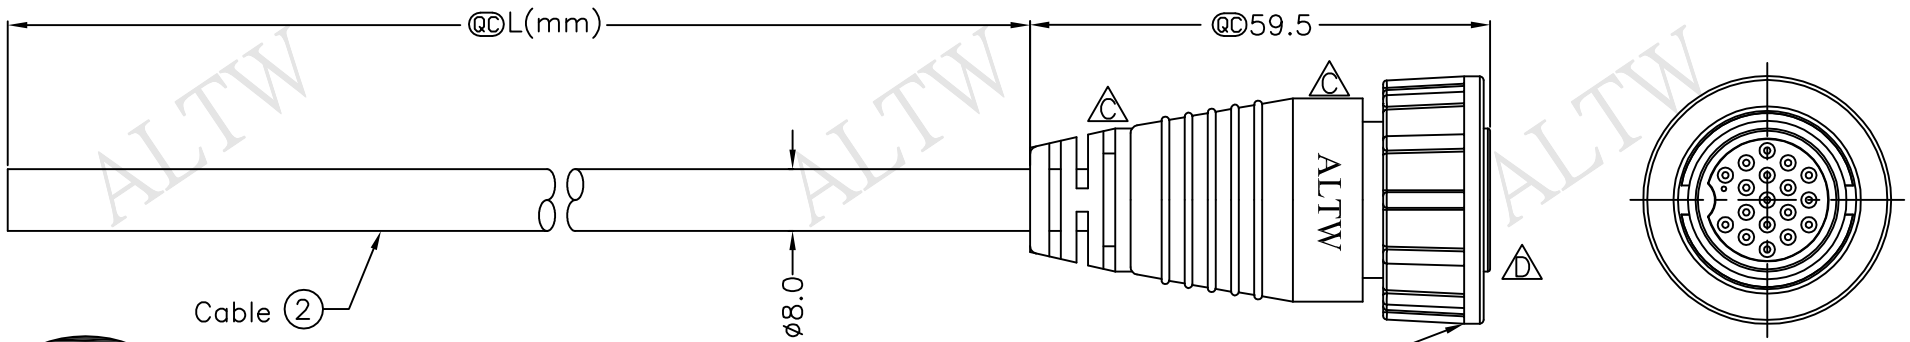


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE3-910040~3	2009/01/06	TOMMY	UPDATE DRAWING
C	LEN1370422~425	2013/07/17	Ruru	Modify the SR & Change Logo
D	LEN1610242~245	2016/01/15	Vicky	Update View

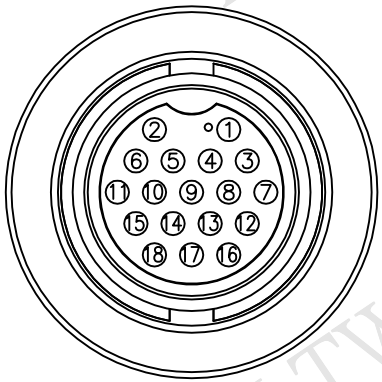

DD-18AFMM-SL7000 ①
Color:Black

DD-18AFMM-SL7AXX
XX:01~99Meters
01:01Meter
02:02Meters
:
:
99:99Meters
Cable Length(L):01~99Meters



Blue/White	藍/白	18
Green/White	綠/白	17
Orange/White	橙/白	16
Red/White	紅/白	15
Brown/White	棕/白	14
Black/White	黑/白	13
Light Green	淺綠	12
Purple	紫	11
Orange	橙	10
Black	黑	9
Red	紅	8
Pink	粉紅	7
Gray	灰	6
Yellow	黃	5
Green	綠	4
White	白	3
Blue	藍	2
Brown	棕	1
Wire Color		Conn.
Pin Out		

- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Connector: Nylon+GF, Black
 - * Male Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 24#*18C+D+A, PVC Jacket
UV Resistant OD=8.0mm, Black
 - * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm		TITLE
TOLERANCE	±0.5 mm	Large Cable Screw 18P F Conn M Pin
SCALE	Free	SHEET 1 OF 1
REV.	D	SIZE A4
@C :Inspection Item		

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
DD-18AFMM-SL7AXX	Vicky	2016/01/15
ALTW	Rita	2016/01/15
	Lisa	2016/01/15

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.