


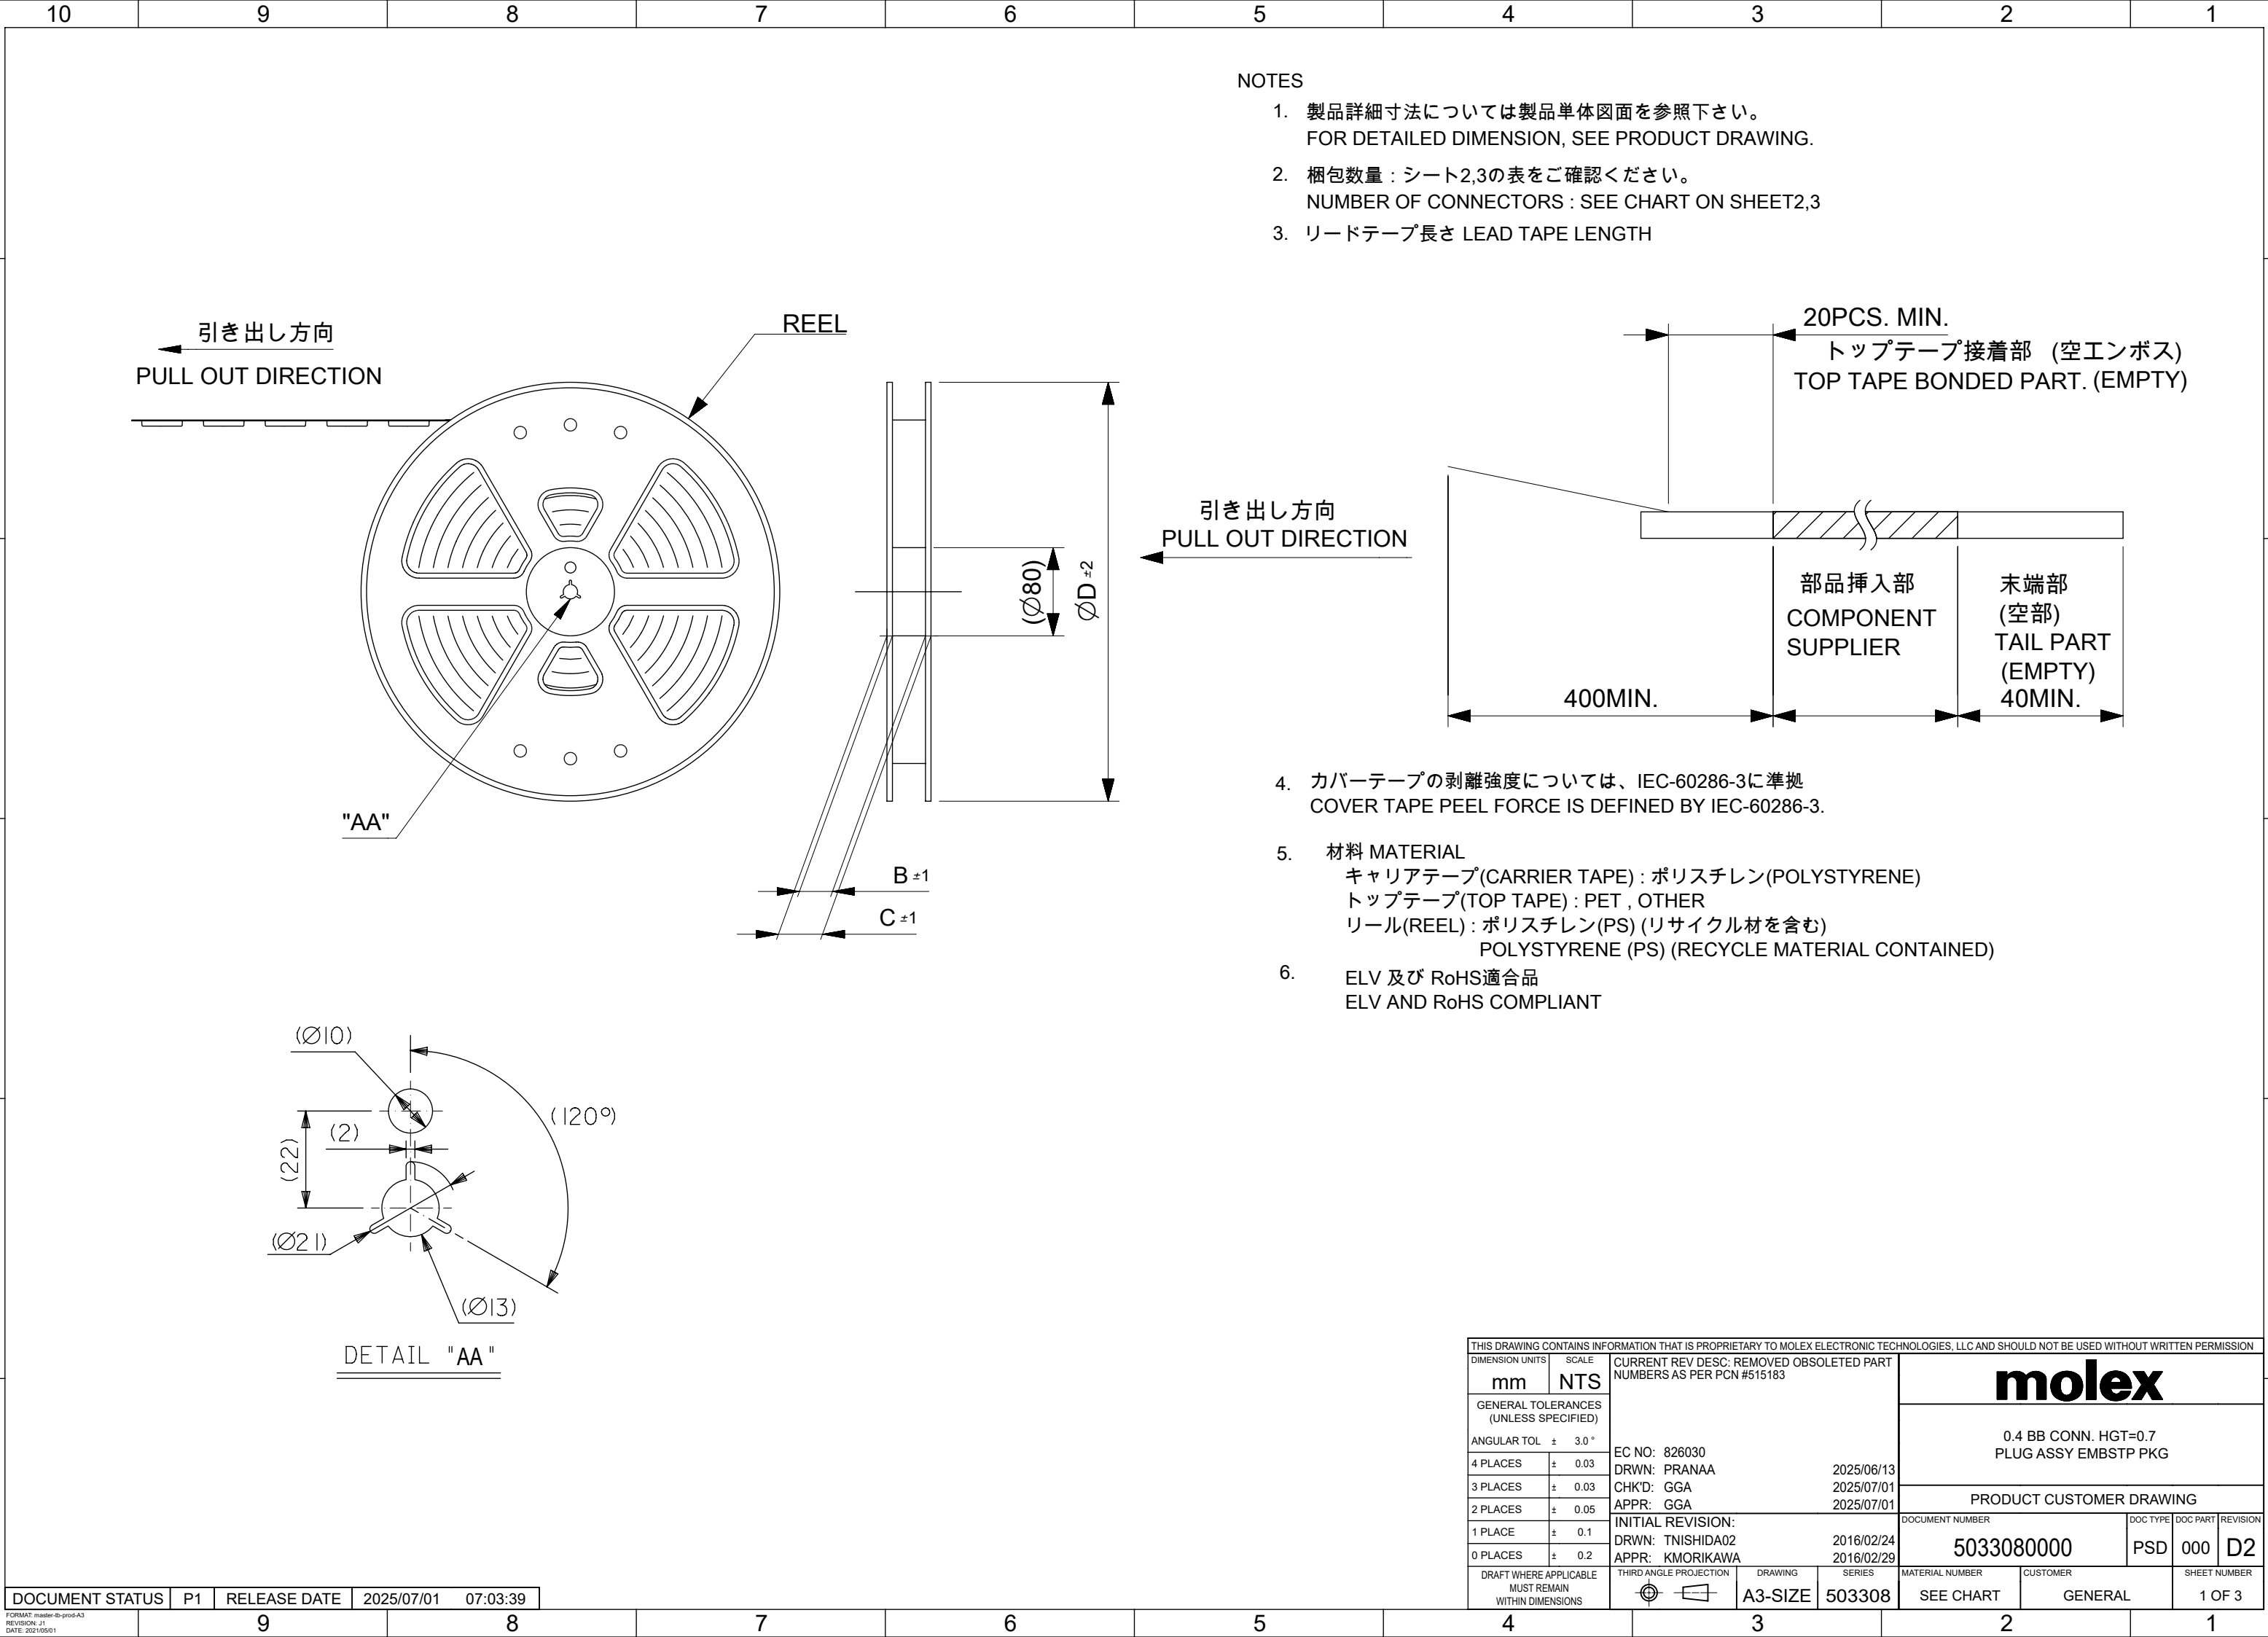


NOTES

- 1. 製品詳細寸法については製品単体図面を参照下さい。
FOR DETAILED DIMENSION, SEE PRODUCT DRAWING.
- 2. 梱包数量：シート2,3の表をご確認ください。
NUMBER OF CONNECTORS：SEE CHART ON SHEET2,3
- 3. リードテープ長さ LEAD TAPE LENGTH
- 4. カバーテープの剥離強度については、IEC-60286-3に準拠
COVER TAPE PEEL FORCE IS DEFINED BY IEC-60286-3.
- 5. 材料 MATERIAL
キャリアテープ(CARRIER TAPE)：ポリスチレン(POLYSTYRENE)
トップテープ(TOP TAPE)：PET , OTHER
リール(REEL)：ポリスチレン(PS) (リサイクル材を含む)
POLYSTYRENE (PS) (RECYCLE MATERIAL CONTAINED)
- 6. ELV 及び RoHS適合品
ELV AND RoHS COMPLIANT

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
DIMENSION UNITS		SCALE	CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN #515183				molex 0.4 BB CONN. HGT=0.7 PLUG ASSY EMBSTP PKG					
mm		NTS										
GENERAL TOLERANCES (UNLESS SPECIFIED)			EC NO: 826030 DRWN: PRANAA 2025/06/13 CHK'D: GGA 2025/07/01 APPR: GGA 2025/07/01 INITIAL REVISION: DRWN: TNISHIDA02 2016/02/24 APPR: KMORIKAWA 2016/02/29				PRODUCT CUSTOMER DRAWING					
ANGULAR TOL ± 3.0 °							DOCUMENT NUMBER			DOC TYPE	DOC PART	REVISION
4 PLACES ± 0.03							5033080000			PSD	000	D2
3 PLACES ± 0.03												
2 PLACES ± 0.05												
1 PLACE ± 0.1												
0 PLACES ± 0.2												
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER	SHEET NUMBER		
					A3-SIZE	503308	SEE CHART		GENERAL	1 OF 3		


DOCUMENT STATUS	P1	RELEASE DATE	2025/07/01	07:03:39
-----------------	----	--------------	------------	----------

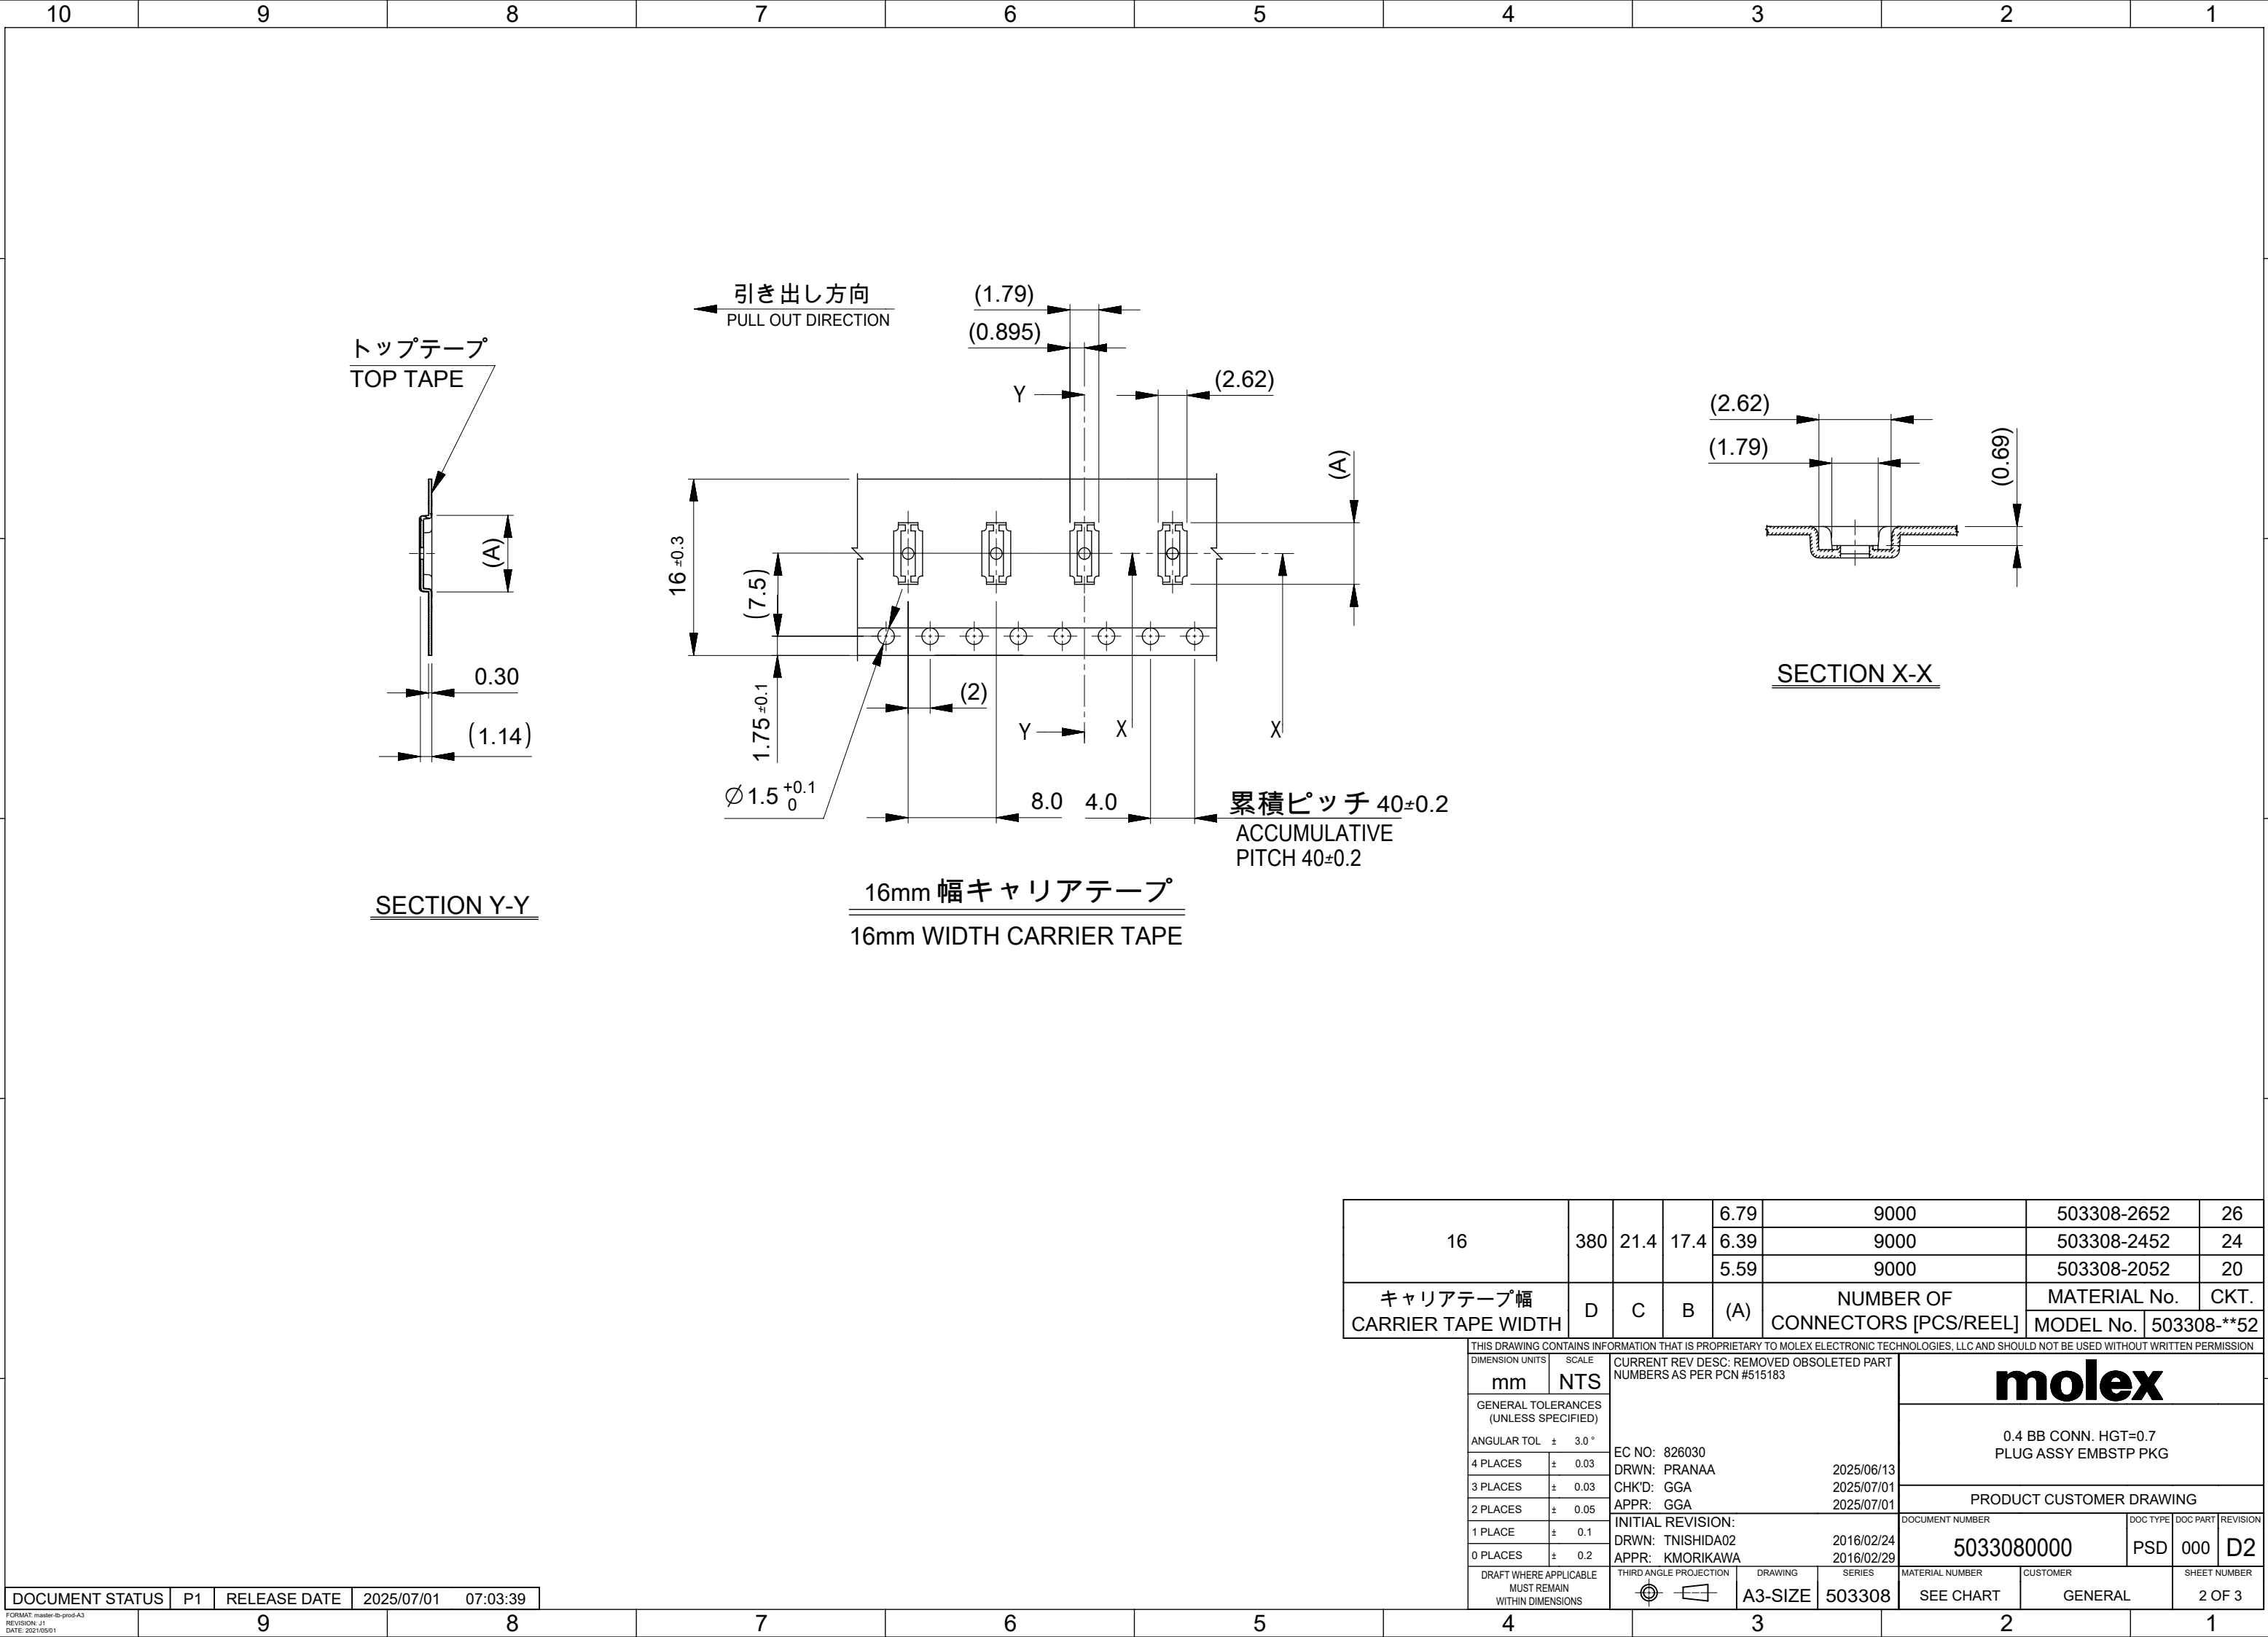


16	380	21.4	17.4	6.79	9000	503308-2652		26
				6.39	9000	503308-2452		24
				5.59	9000	503308-2052		20
キャリアテープ幅 CARRIER TAPE WIDTH	D	C	B	(A)	NUMBER OF CONNECTORS [PCS/REEL]	MATERIAL No.		CKT.
						MODEL No.	503308-**52	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN #515183				molex				
mm		NTS										
GENERAL TOLERANCES (UNLESS SPECIFIED)												
ANGULAR TOL ± 3.0 °												
4 PLACES ± 0.03												
3 PLACES ± 0.03				EC NO: 826030				0.4 BB CONN. HGT=0.7 PLUG ASSY EMBSTP PKG				
2 PLACES ± 0.05				DRWN: PRANAA 2025/06/13								
1 PLACE ± 0.1				CHK'D: GGA 2025/07/01								
0 PLACES ± 0.2				APPR: GGA 2025/07/01				PRODUCT CUSTOMER DRAWING				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				INITIAL REVISION:				DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
				DRWN: TNISHIDA02 2016/02/24				5033080000		PSD	000	D2
				APPR: KMORIKAWA 2016/02/29								
THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER		
		A3-SIZE		503308		SEE CHART		GENERAL		2 OF 3		

DOCUMENT STATUS	P1	RELEASE DATE	2025/07/01	07:03:39
-----------------	----	--------------	------------	----------

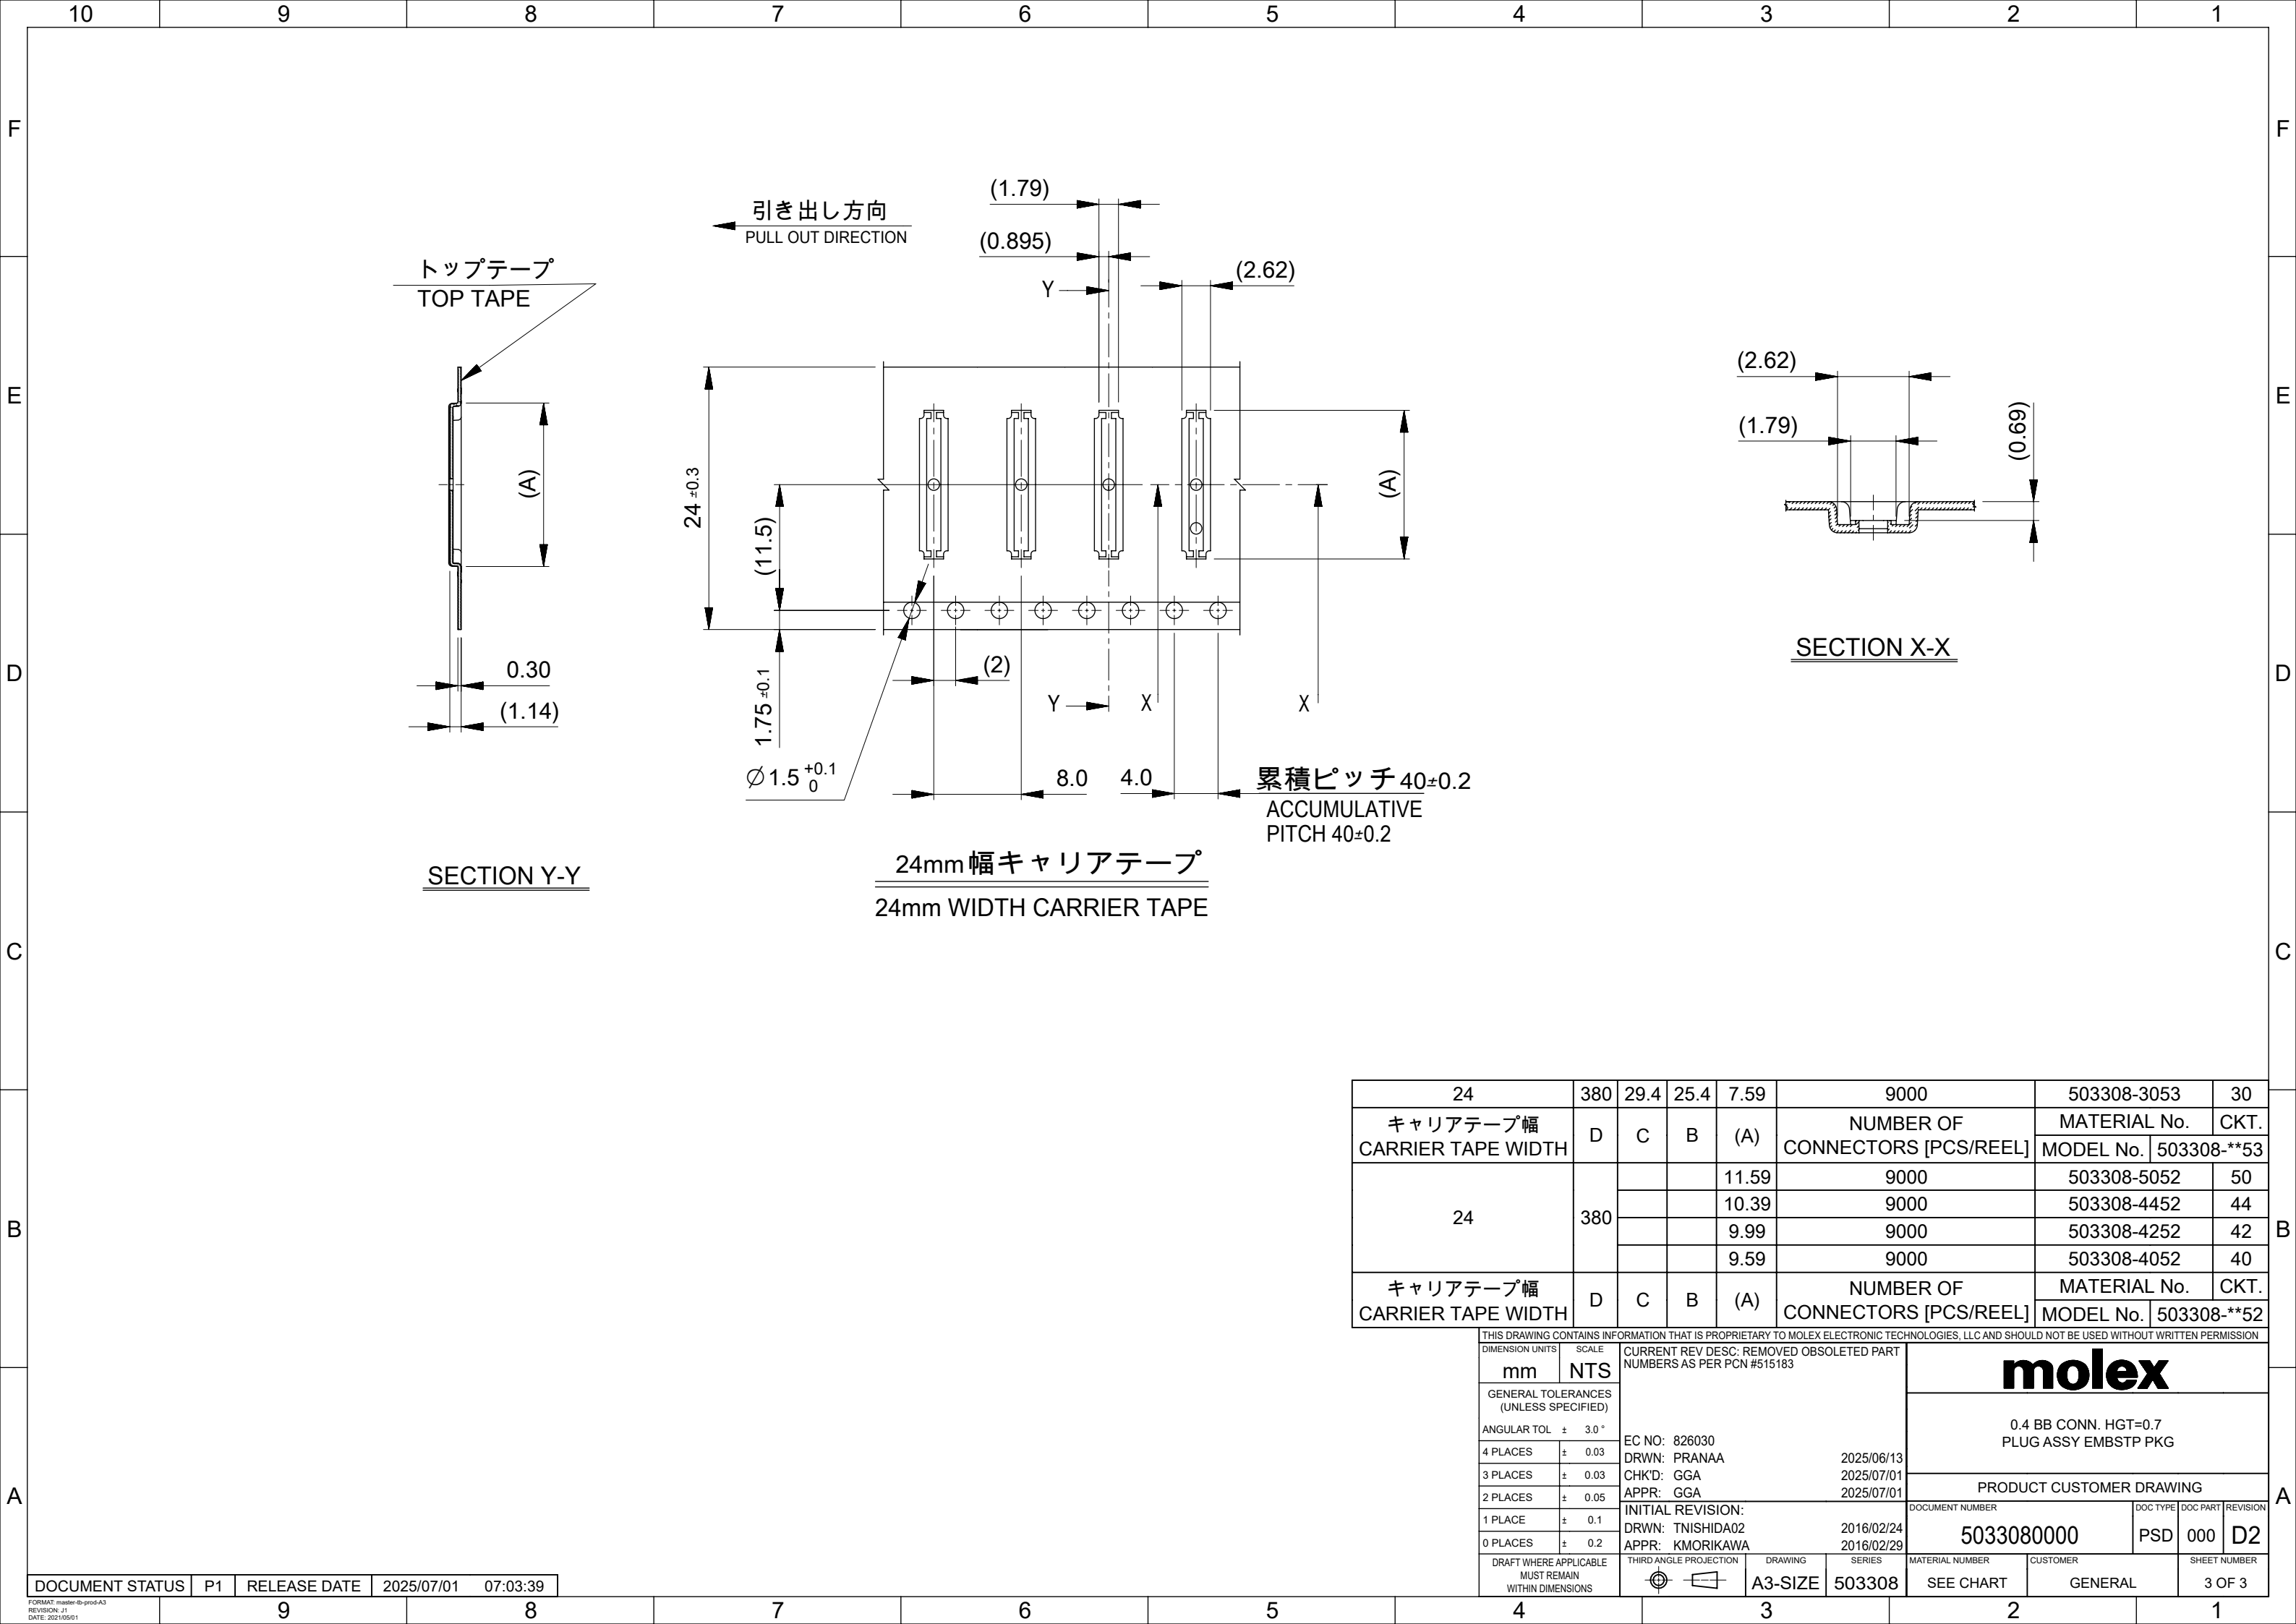



24	380	29.4	25.4	7.59	9000	503308-3053	30
キャリアテープ幅 CARRIER TAPE WIDTH	D	C	B	(A)	NUMBER OF CONNECTORS [PCS/REEL]	MATERIAL No.	CKT.
						MODEL No.	503308-**53
24	380			11.59	9000	503308-5052	50
				10.39	9000	503308-4452	44
				9.99	9000	503308-4252	42
				9.59	9000	503308-4052	40
キャリアテープ幅 CARRIER TAPE WIDTH	D	C	B	(A)	NUMBER OF CONNECTORS [PCS/REEL]	MATERIAL No.	CKT.
						MODEL No.	503308-**52

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN #515183				molex 0.4 BB CONN. HGT=0.7 PLUG ASSY EMBSTP PKG			
mm		NTS									
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 826030 DRWN: PRANAA 2025/06/13 CHK'D: GGA 2025/07/01 APPR: GGA 2025/07/01							
ANGULAR TOL ± 3.0 °											
4 PLACES		± 0.03		INITIAL REVISION: DRWN: TWISHIDA02 2016/02/24 APPR: KMORIKAWA 2016/02/29							
3 PLACES		± 0.03									
2 PLACES		± 0.05		DOCUMENT NUMBER 5033080000							
1 PLACE		± 0.1									
0 PLACES		± 0.2		DOC TYPE PSD		DOC PART 000		REVISION D2			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION 		DRAWING A3-SIZE		SERIES 503308		MATERIAL NUMBER SEE CHART	
								CUSTOMER GENERAL		SHEET NUMBER 3 OF 3	

DOCUMENT STATUS	P1	RELEASE DATE	2025/07/01	07:03:39
-----------------	----	--------------	------------	----------

FORMAT: master-b-prod-A3
REVISION: J1
DATE: 2021/05/01

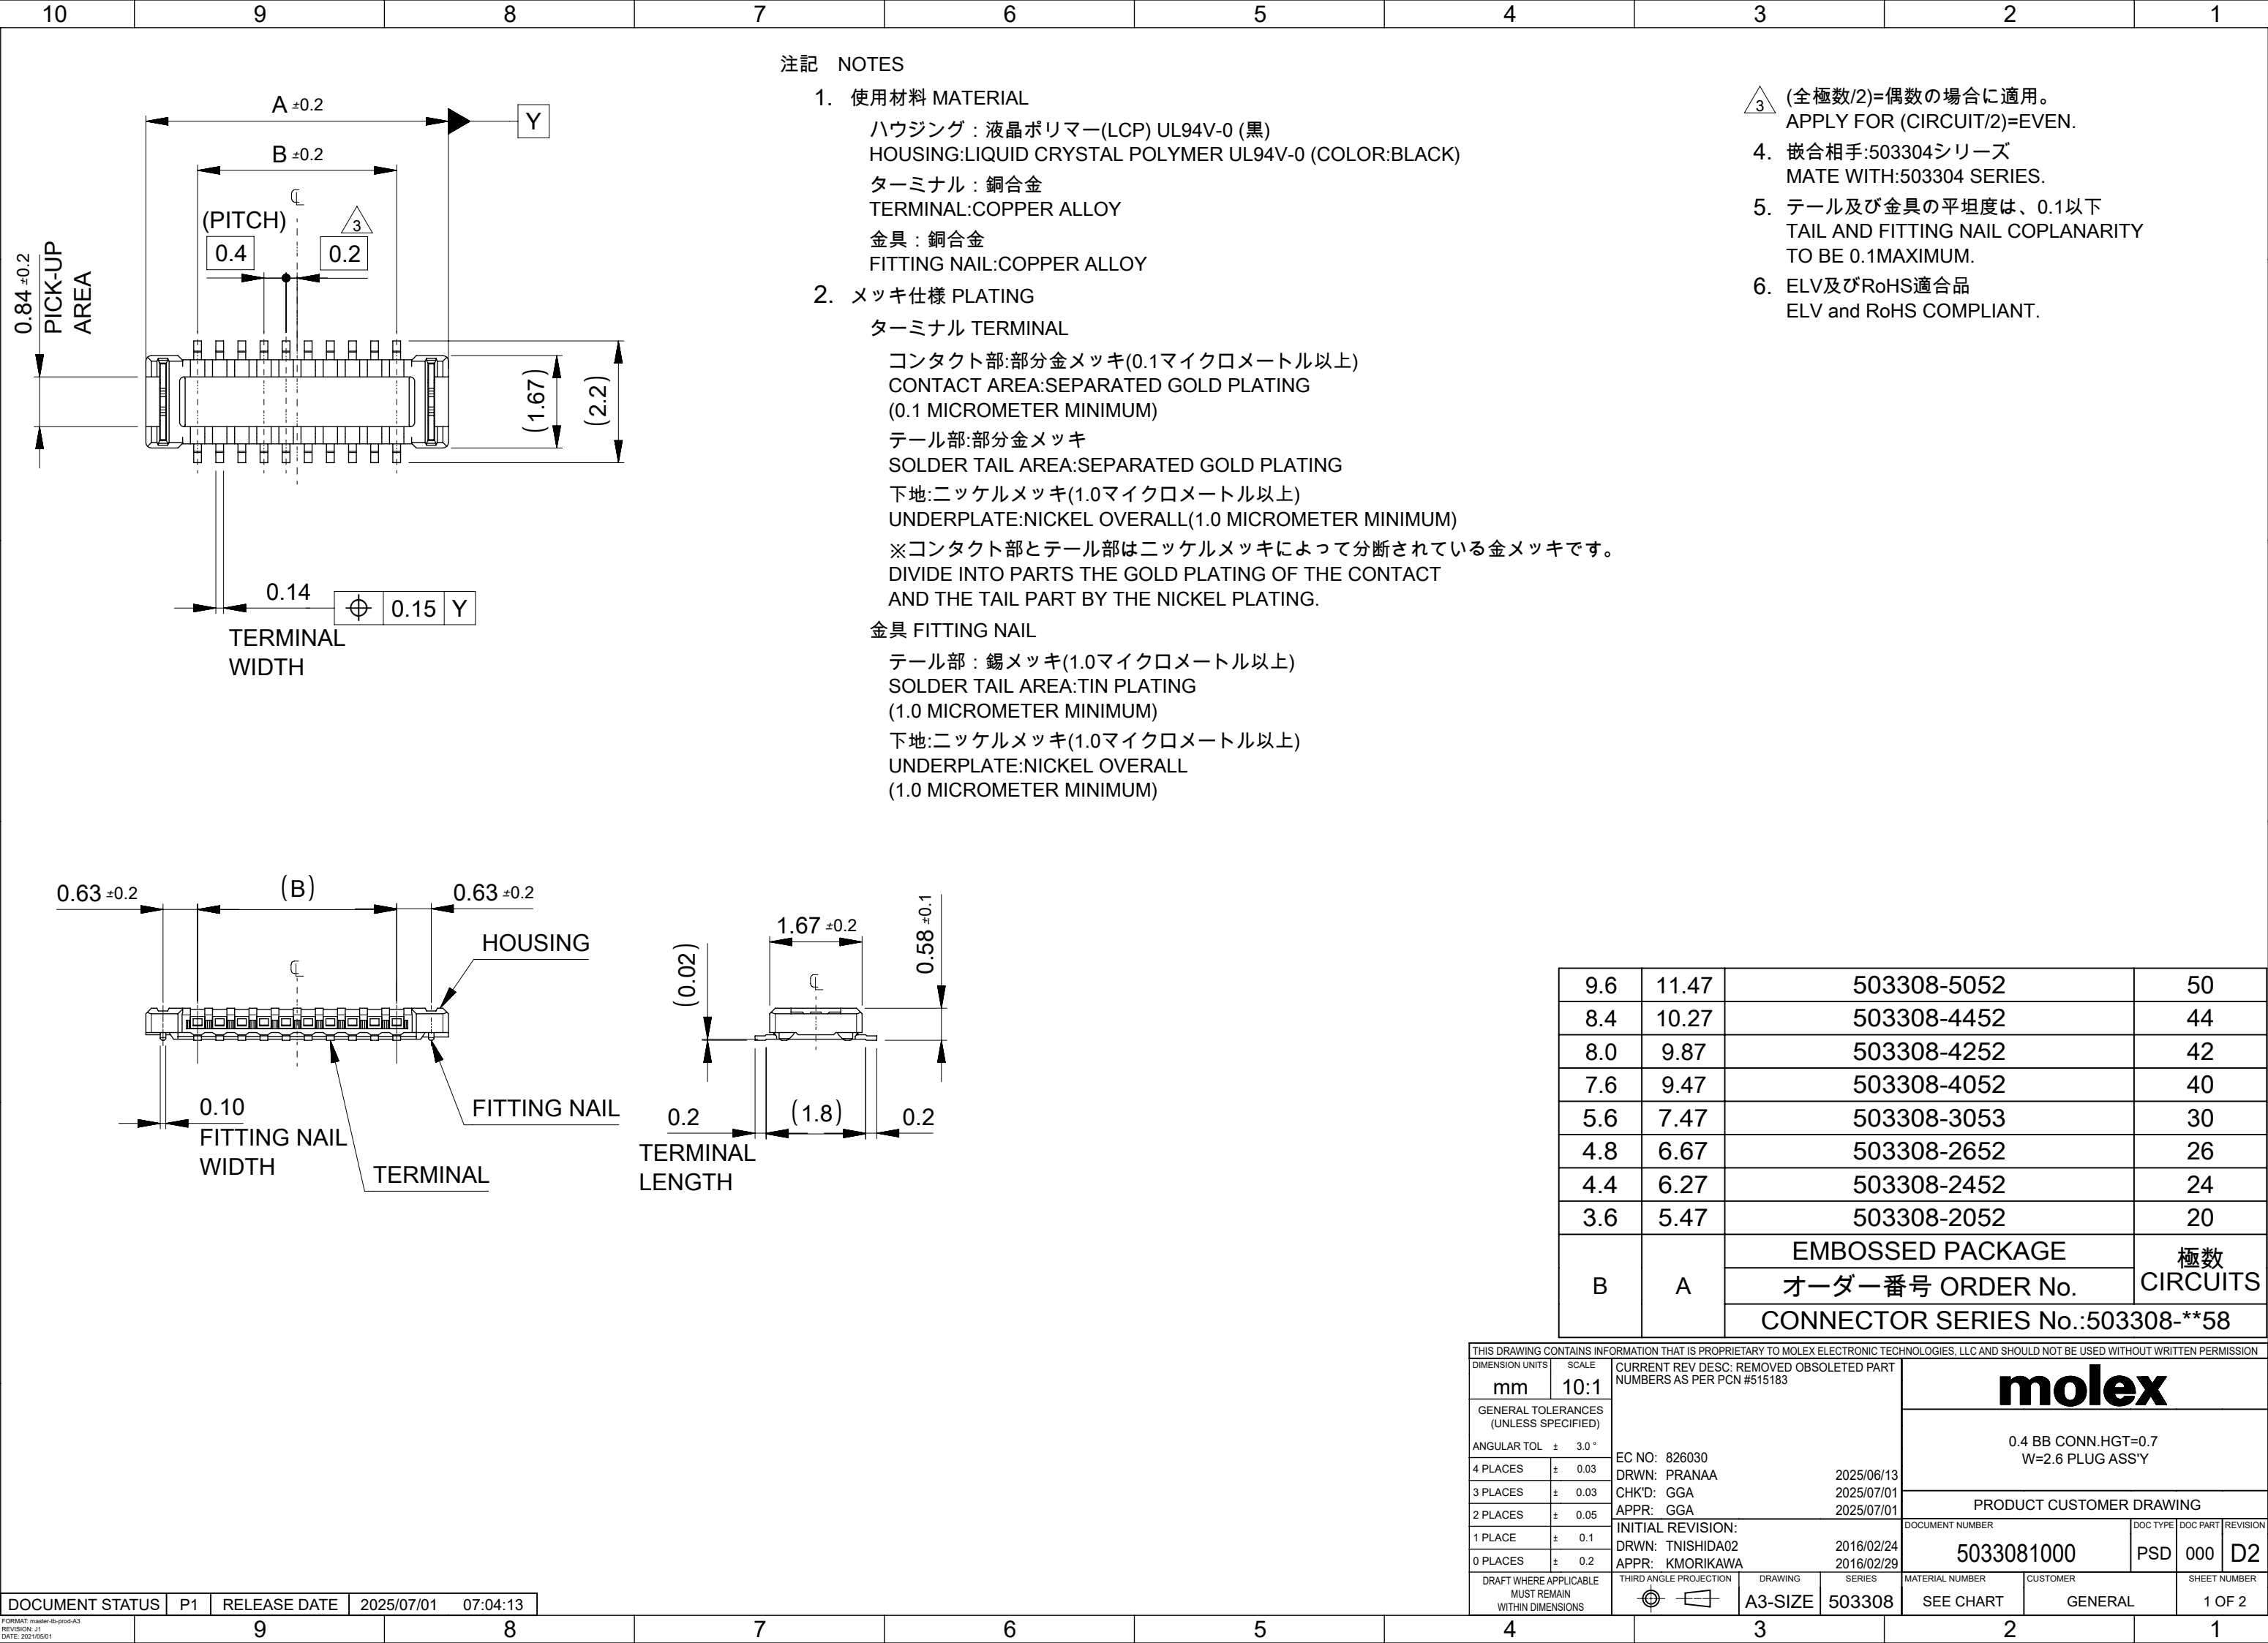

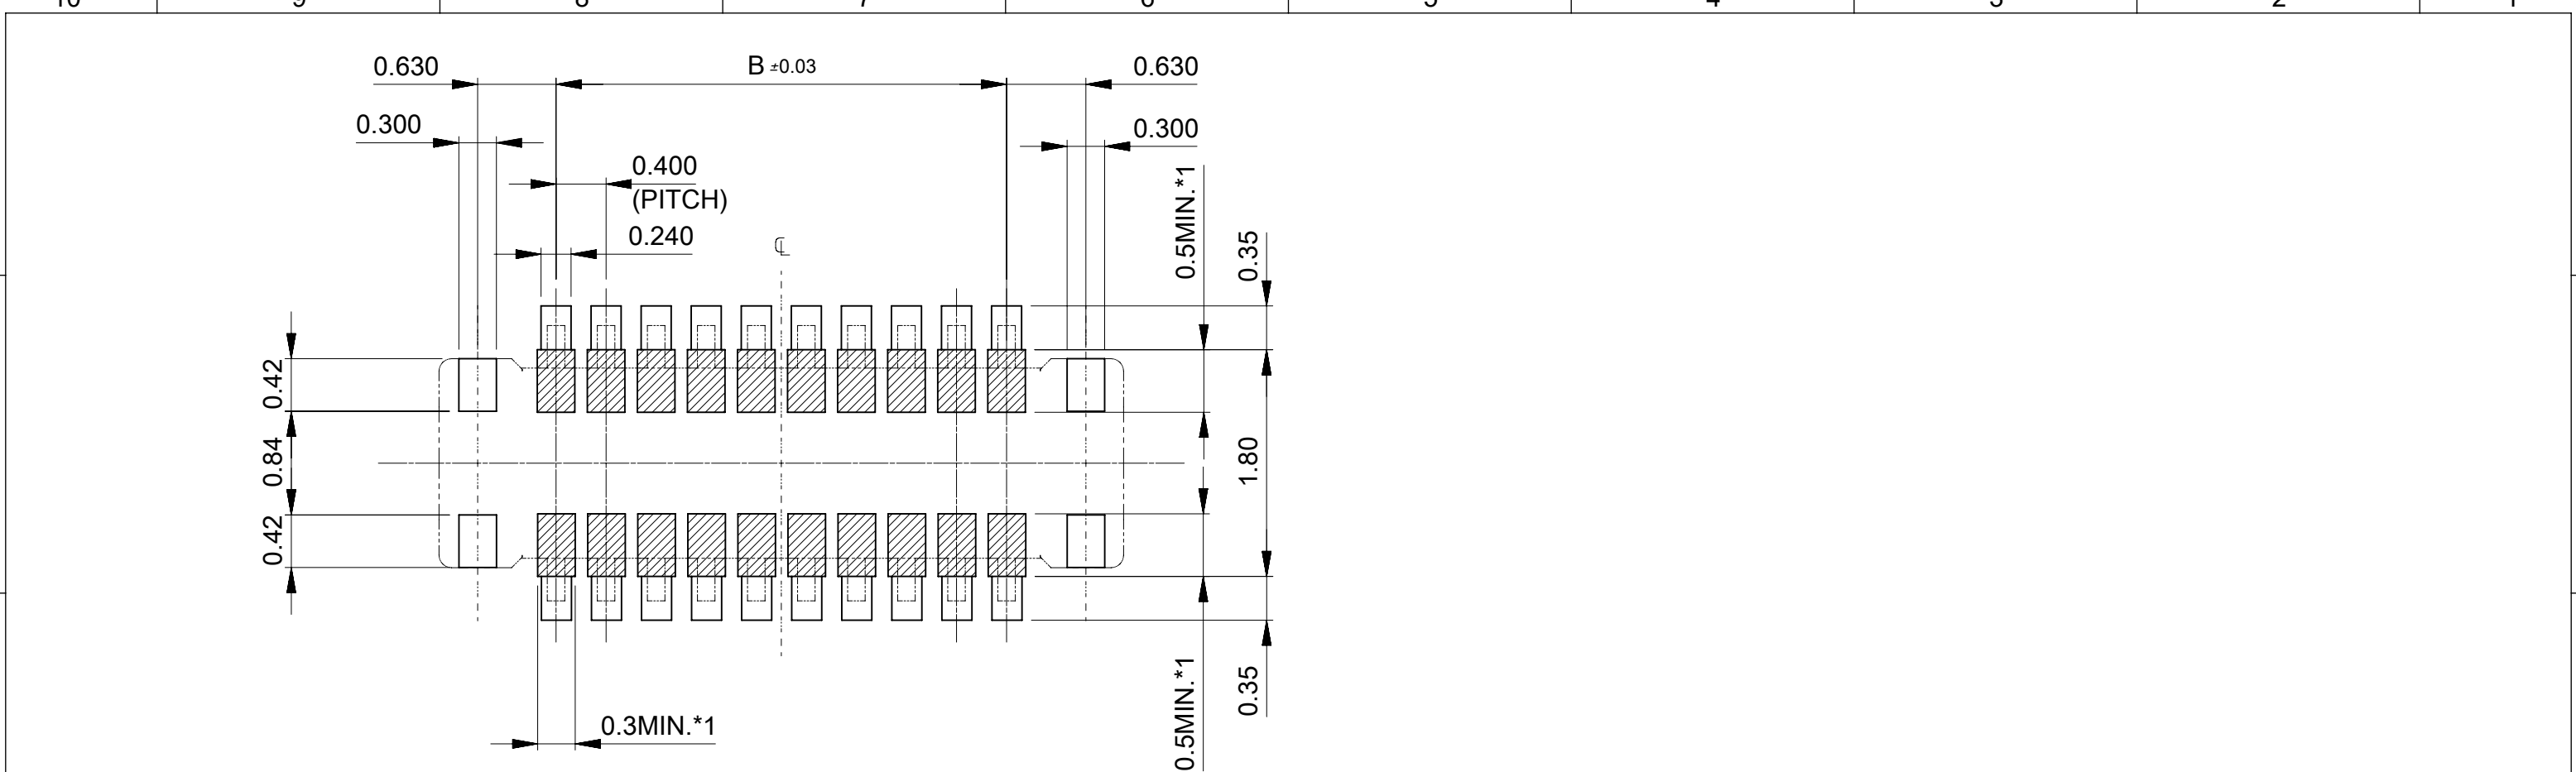


RECOMMENDED P.W.BOARD PATTERN LAYOUT(REFERENCE)


THICKNESS OF METAL MASK FOR REFERENCE : t=0.1mm
OPEN APERTURE RATIO OF METAL MASK FOR REFERENCE : 100%

- *1 パターン引き回し、および半田禁止エリア
(当該箇所においては、これと接する回路以外の配線を禁止する。
また、接する回路を配線する場合はレジストを施し、この部分に
半田は無きこととする。)
- *1 PROHIBITED AREA OF PATTERN WIRING AND SOLDER.
(FOR EACH AREA, THE WIRING THAT TOUCHES ON THE SOLDER
CAN BE ATTACHED, THEN COVERED WITH A FILM TO KEEP SOLDER OUT.)

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE	CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN #515183						
mm		10:1							
GENERAL TOLERANCES (UNLESS SPECIFIED)			EC NO: 826030 DRWN: PRANAA CHK'D: GGA APPR: GGA INITIAL REVISION: DRWN: TNISHIDA02 APPR: KMORIKAWA THIRD ANGLE PROJECTION DRAWING SERIES MATERIAL NUMBER CUSTOMER SHEET NUMBER						
ANGULAR TOL	±	3.0 °							
4 PLACES	±	0.03							
3 PLACES	±	0.03							
2 PLACES	±	0.05							
1 PLACE	±	0.1							
0 PLACES	±	0.2							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			A3-SIZE 503308						
			2025/06/13 2025/07/01 2025/07/01 2016/02/24 2016/02/29						
			0.4 BB CONN.HGT=0.7 W=2.6 PLUG ASS'Y						
			PRODUCT CUSTOMER DRAWING						
			DOCUMENT NUMBER			DOC TYPE		DOC PART	REVISION
			5033081000			PSD		000	D2
			SEE CHART			GENERAL		2 OF 2	

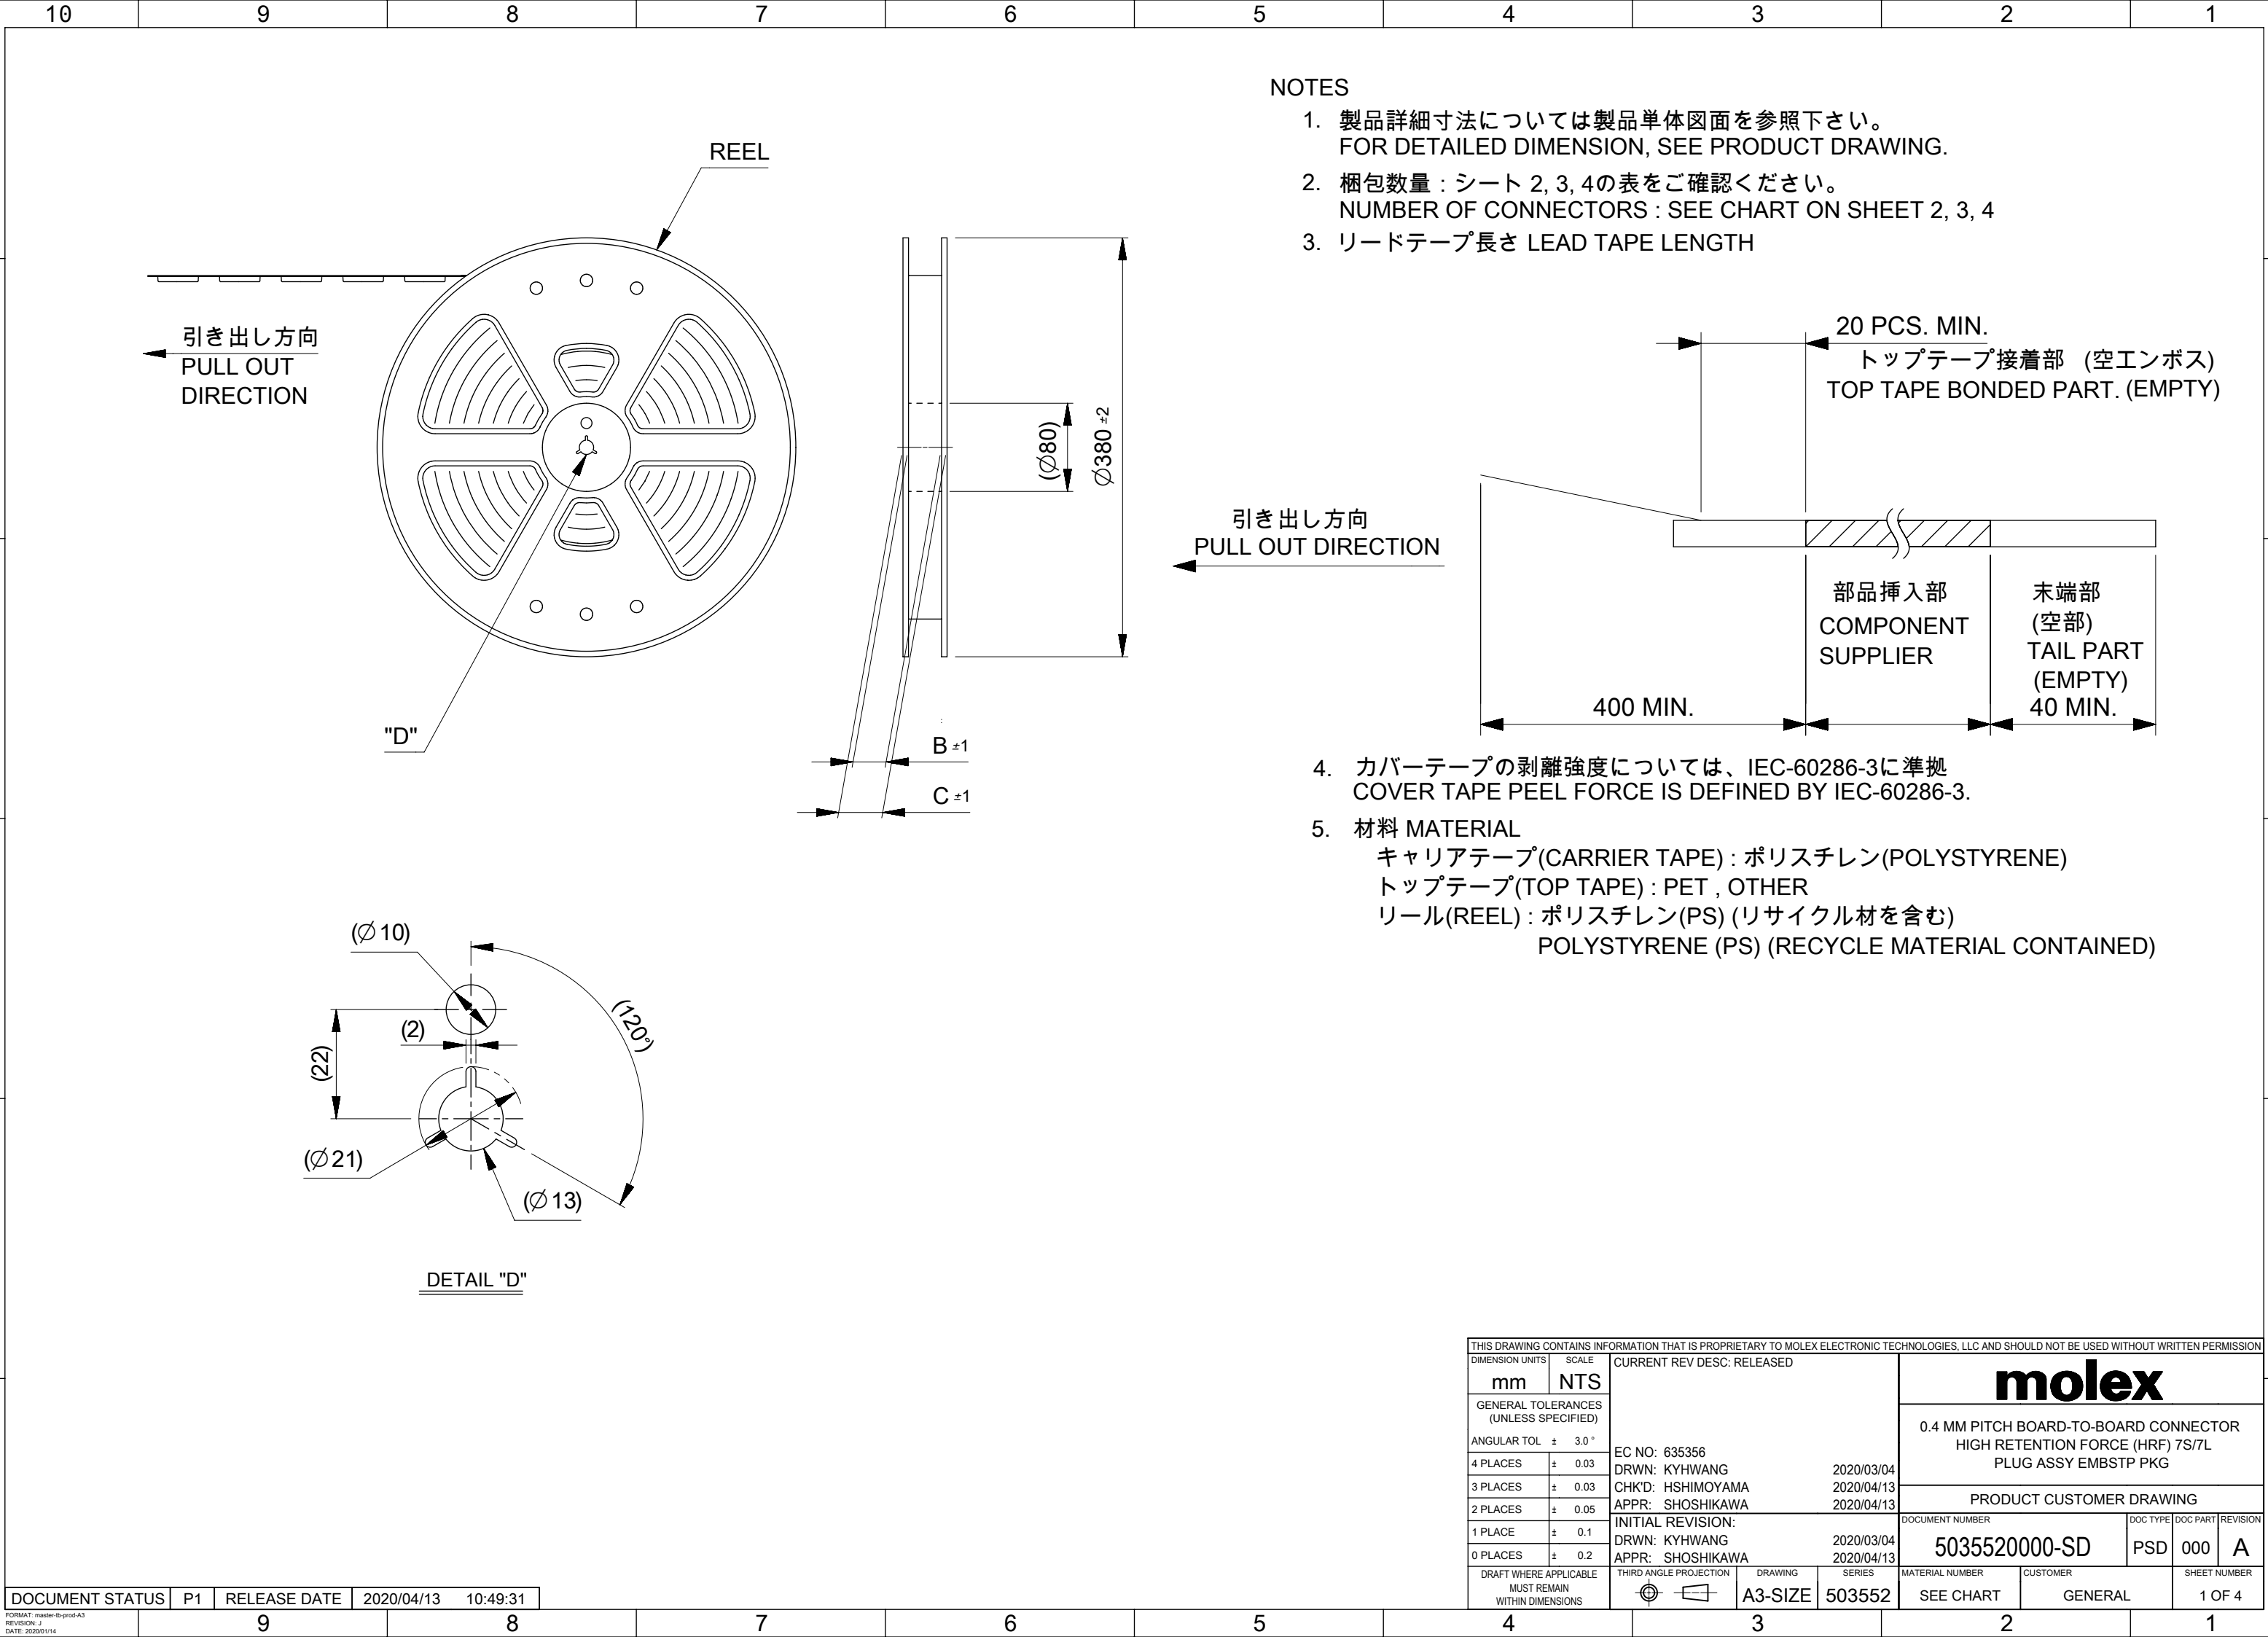


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
DIMENSION UNITS		SCALE		CURRENT REV DESC: RELEASED			molex			
mm		NTS								
GENERAL TOLERANCES (UNLESS SPECIFIED)				0.4 MM PITCH BOARD-TO-BOARD CONNECTOR HIGH RETENTION FORCE (HRF) 7S/7L PLUG ASSY EMBSTP PKG						
ANGULAR TOL ± 3.0 °										
4 PLACES		± 0.03		EC NO: 635356			PRODUCT CUSTOMER DRAWING			
3 PLACES		± 0.03		DRWN: KYHWANG 2020/03/04						
2 PLACES		± 0.05		CHK'D: HSHIMOYAMA 2020/04/13						
1 PLACE		± 0.1		APPR: SHOSHIKAWA 2020/04/13			DOCUMENT NUMBER			
0 PLACES		± 0.2		INITIAL REVISION:			5035520000-SD			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				DRWN: KYHWANG 2020/03/04			DOC TYPE		DOC PART	REVISION
				APPR: SHOSHIKAWA 2020/04/13			PSD		000	A
THIRD ANGLE PROJECTION				DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER
				A3-SIZE		503552		SEE CHART		GENERAL
								SHEET NUMBER		1 OF 4

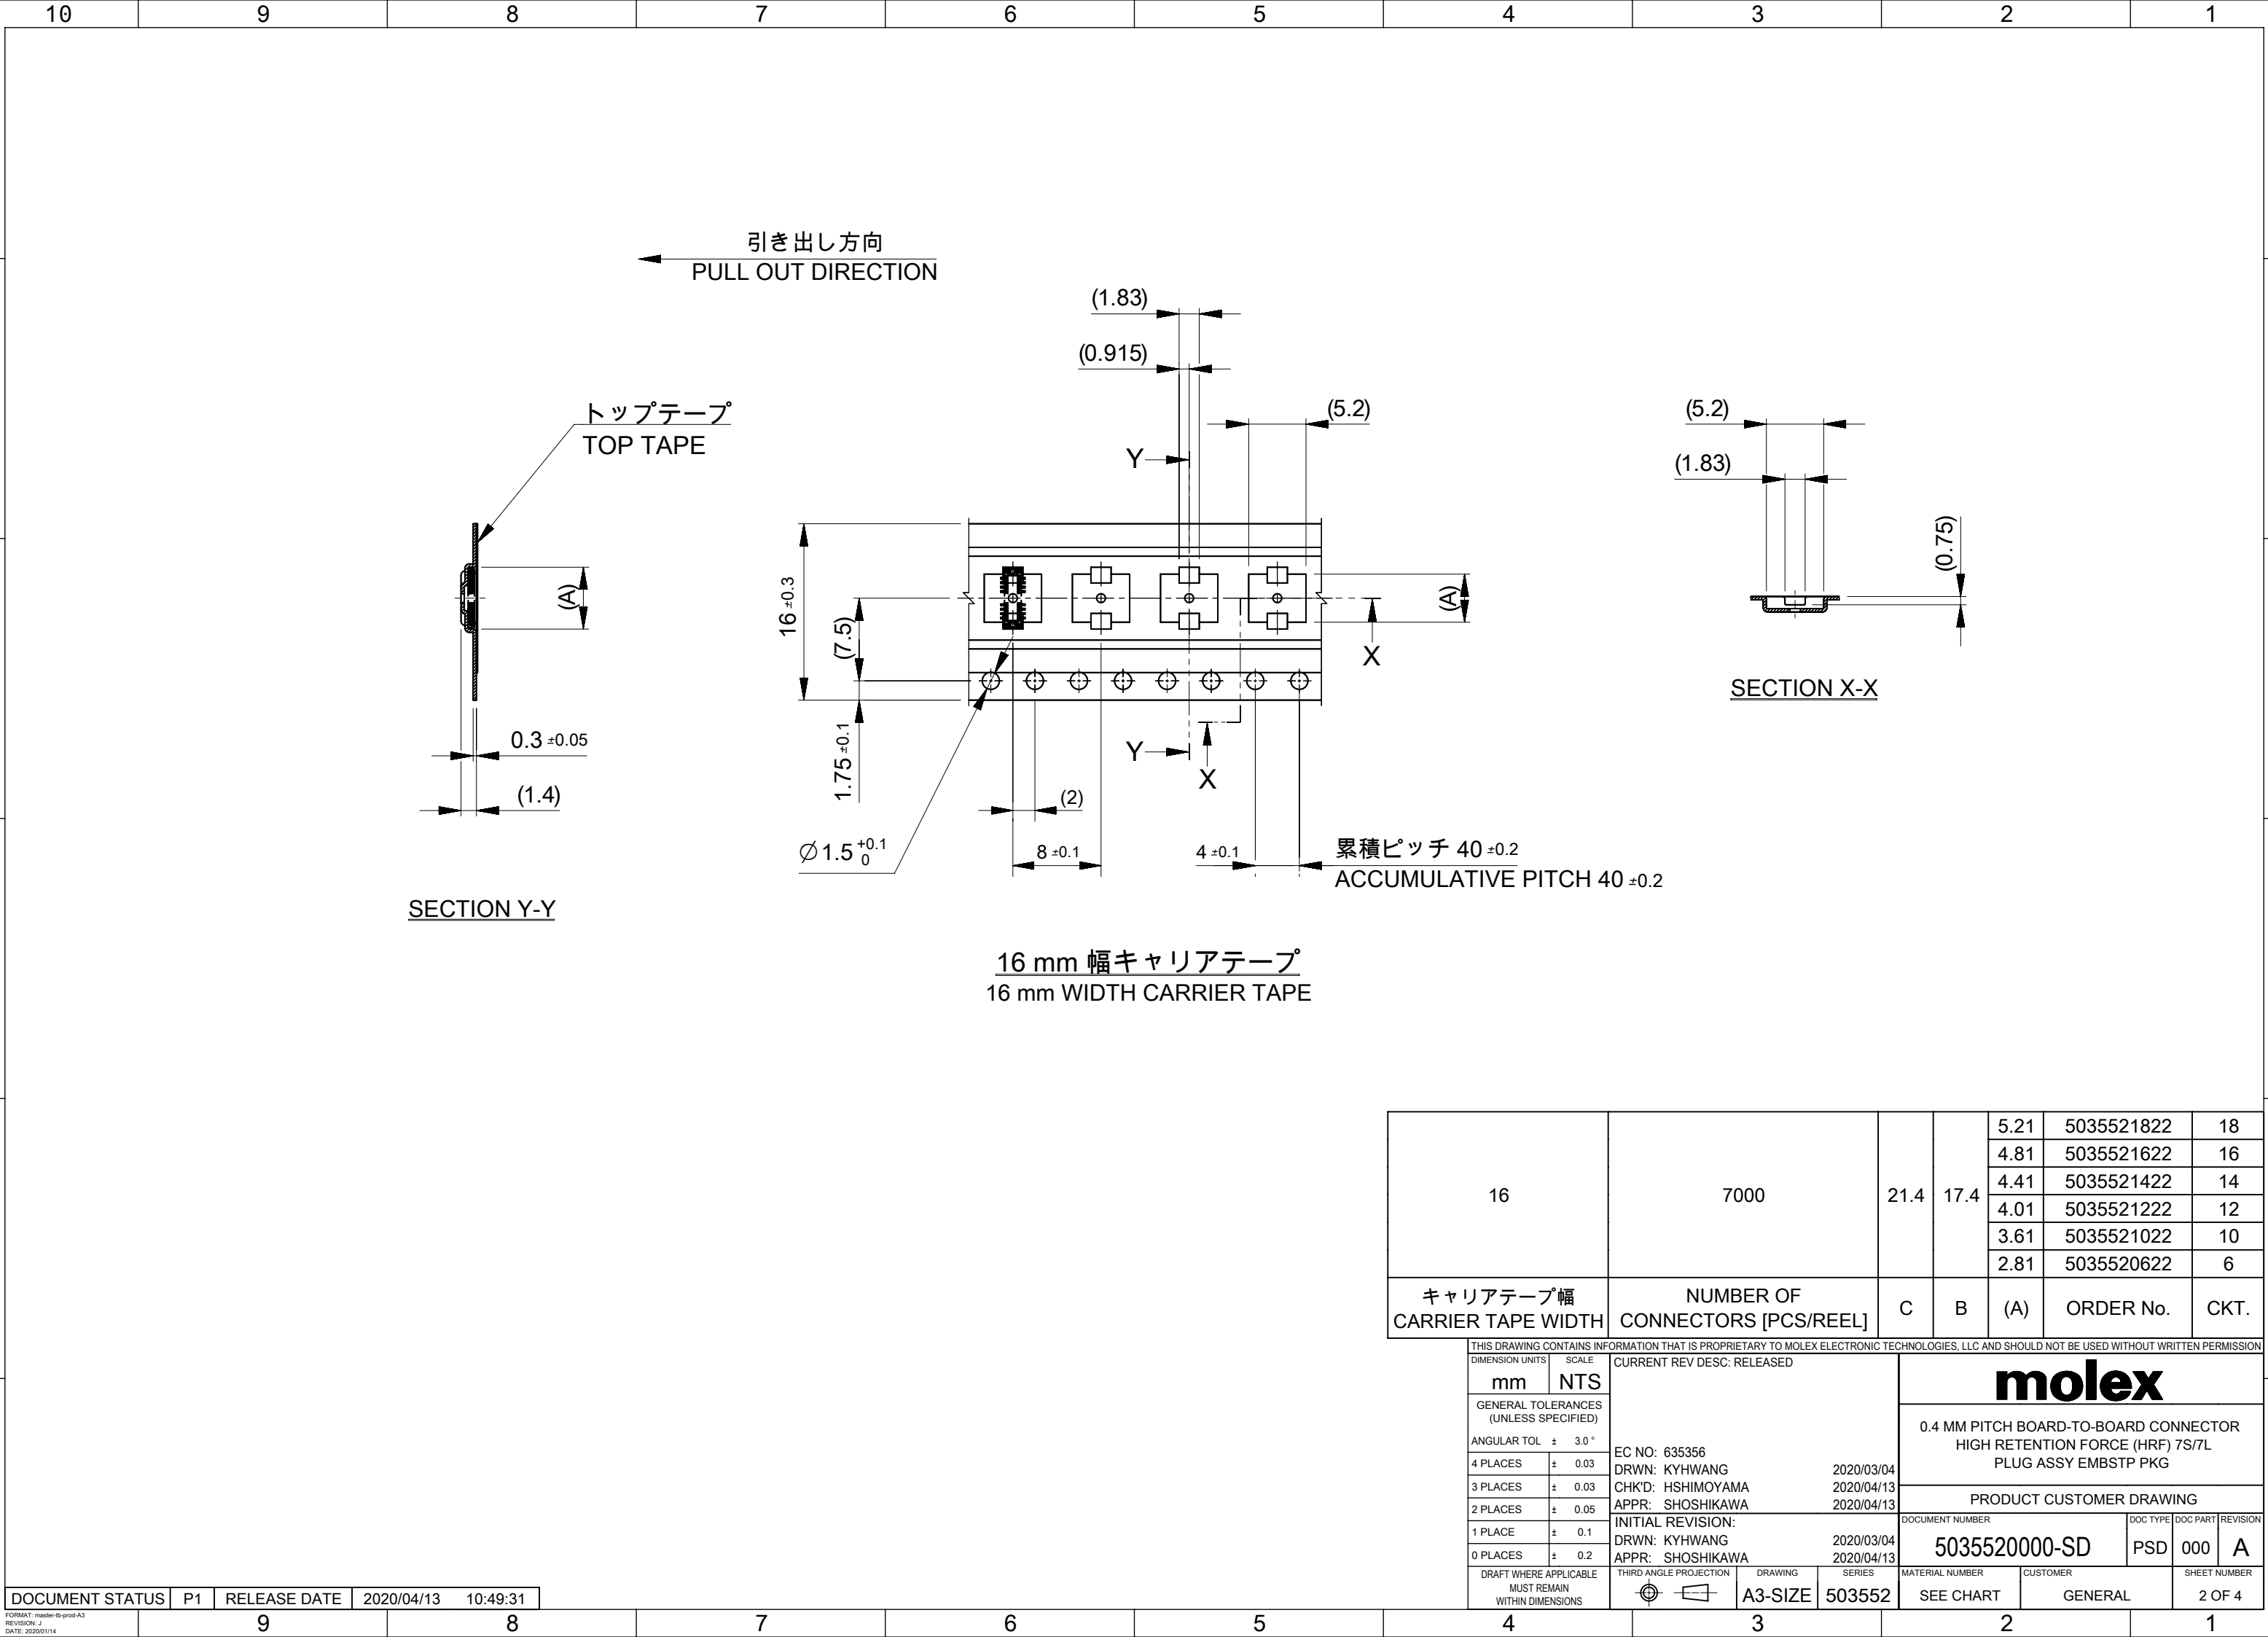


16	7000	21.4	17.4	5.21	5035521822	18
				4.81	5035521622	16
				4.41	5035521422	14
				4.01	5035521222	12
				3.61	5035521022	10
				2.81	5035520622	6
キャリアテープ幅 CARRIER TAPE WIDTH	NUMBER OF CONNECTORS [PCS/REEL]	C	B	(A)	ORDER No.	CKT.


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC: RELEASED	molex				
mm		NTS							
GENERAL TOLERANCES (UNLESS SPECIFIED)									
ANGULAR TOL		± 3.0 °			EC NO: 635356 DRWN: KYHWANG 2020/03/04 CHK'D: HSHIMOYAMA 2020/04/13 APPR: SHOSHIKAWA 2020/04/13				
4 PLACES		± 0.03							
3 PLACES		± 0.03							
2 PLACES		± 0.05							
1 PLACE		± 0.1		INITIAL REVISION: DRWN: KYHWANG 2020/03/04 APPR: SHOSHIKAWA 2020/04/13					
0 PLACES		± 0.2							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION 	DRAWING A3-SIZE	SERIES 503552	MATERIAL NUMBER SEE CHART	CUSTOMER GENERAL	SHEET NUMBER 2 OF 4
DOCUMENT STATUS	P1	RELEASE DATE	2020/04/13	10:49:31					

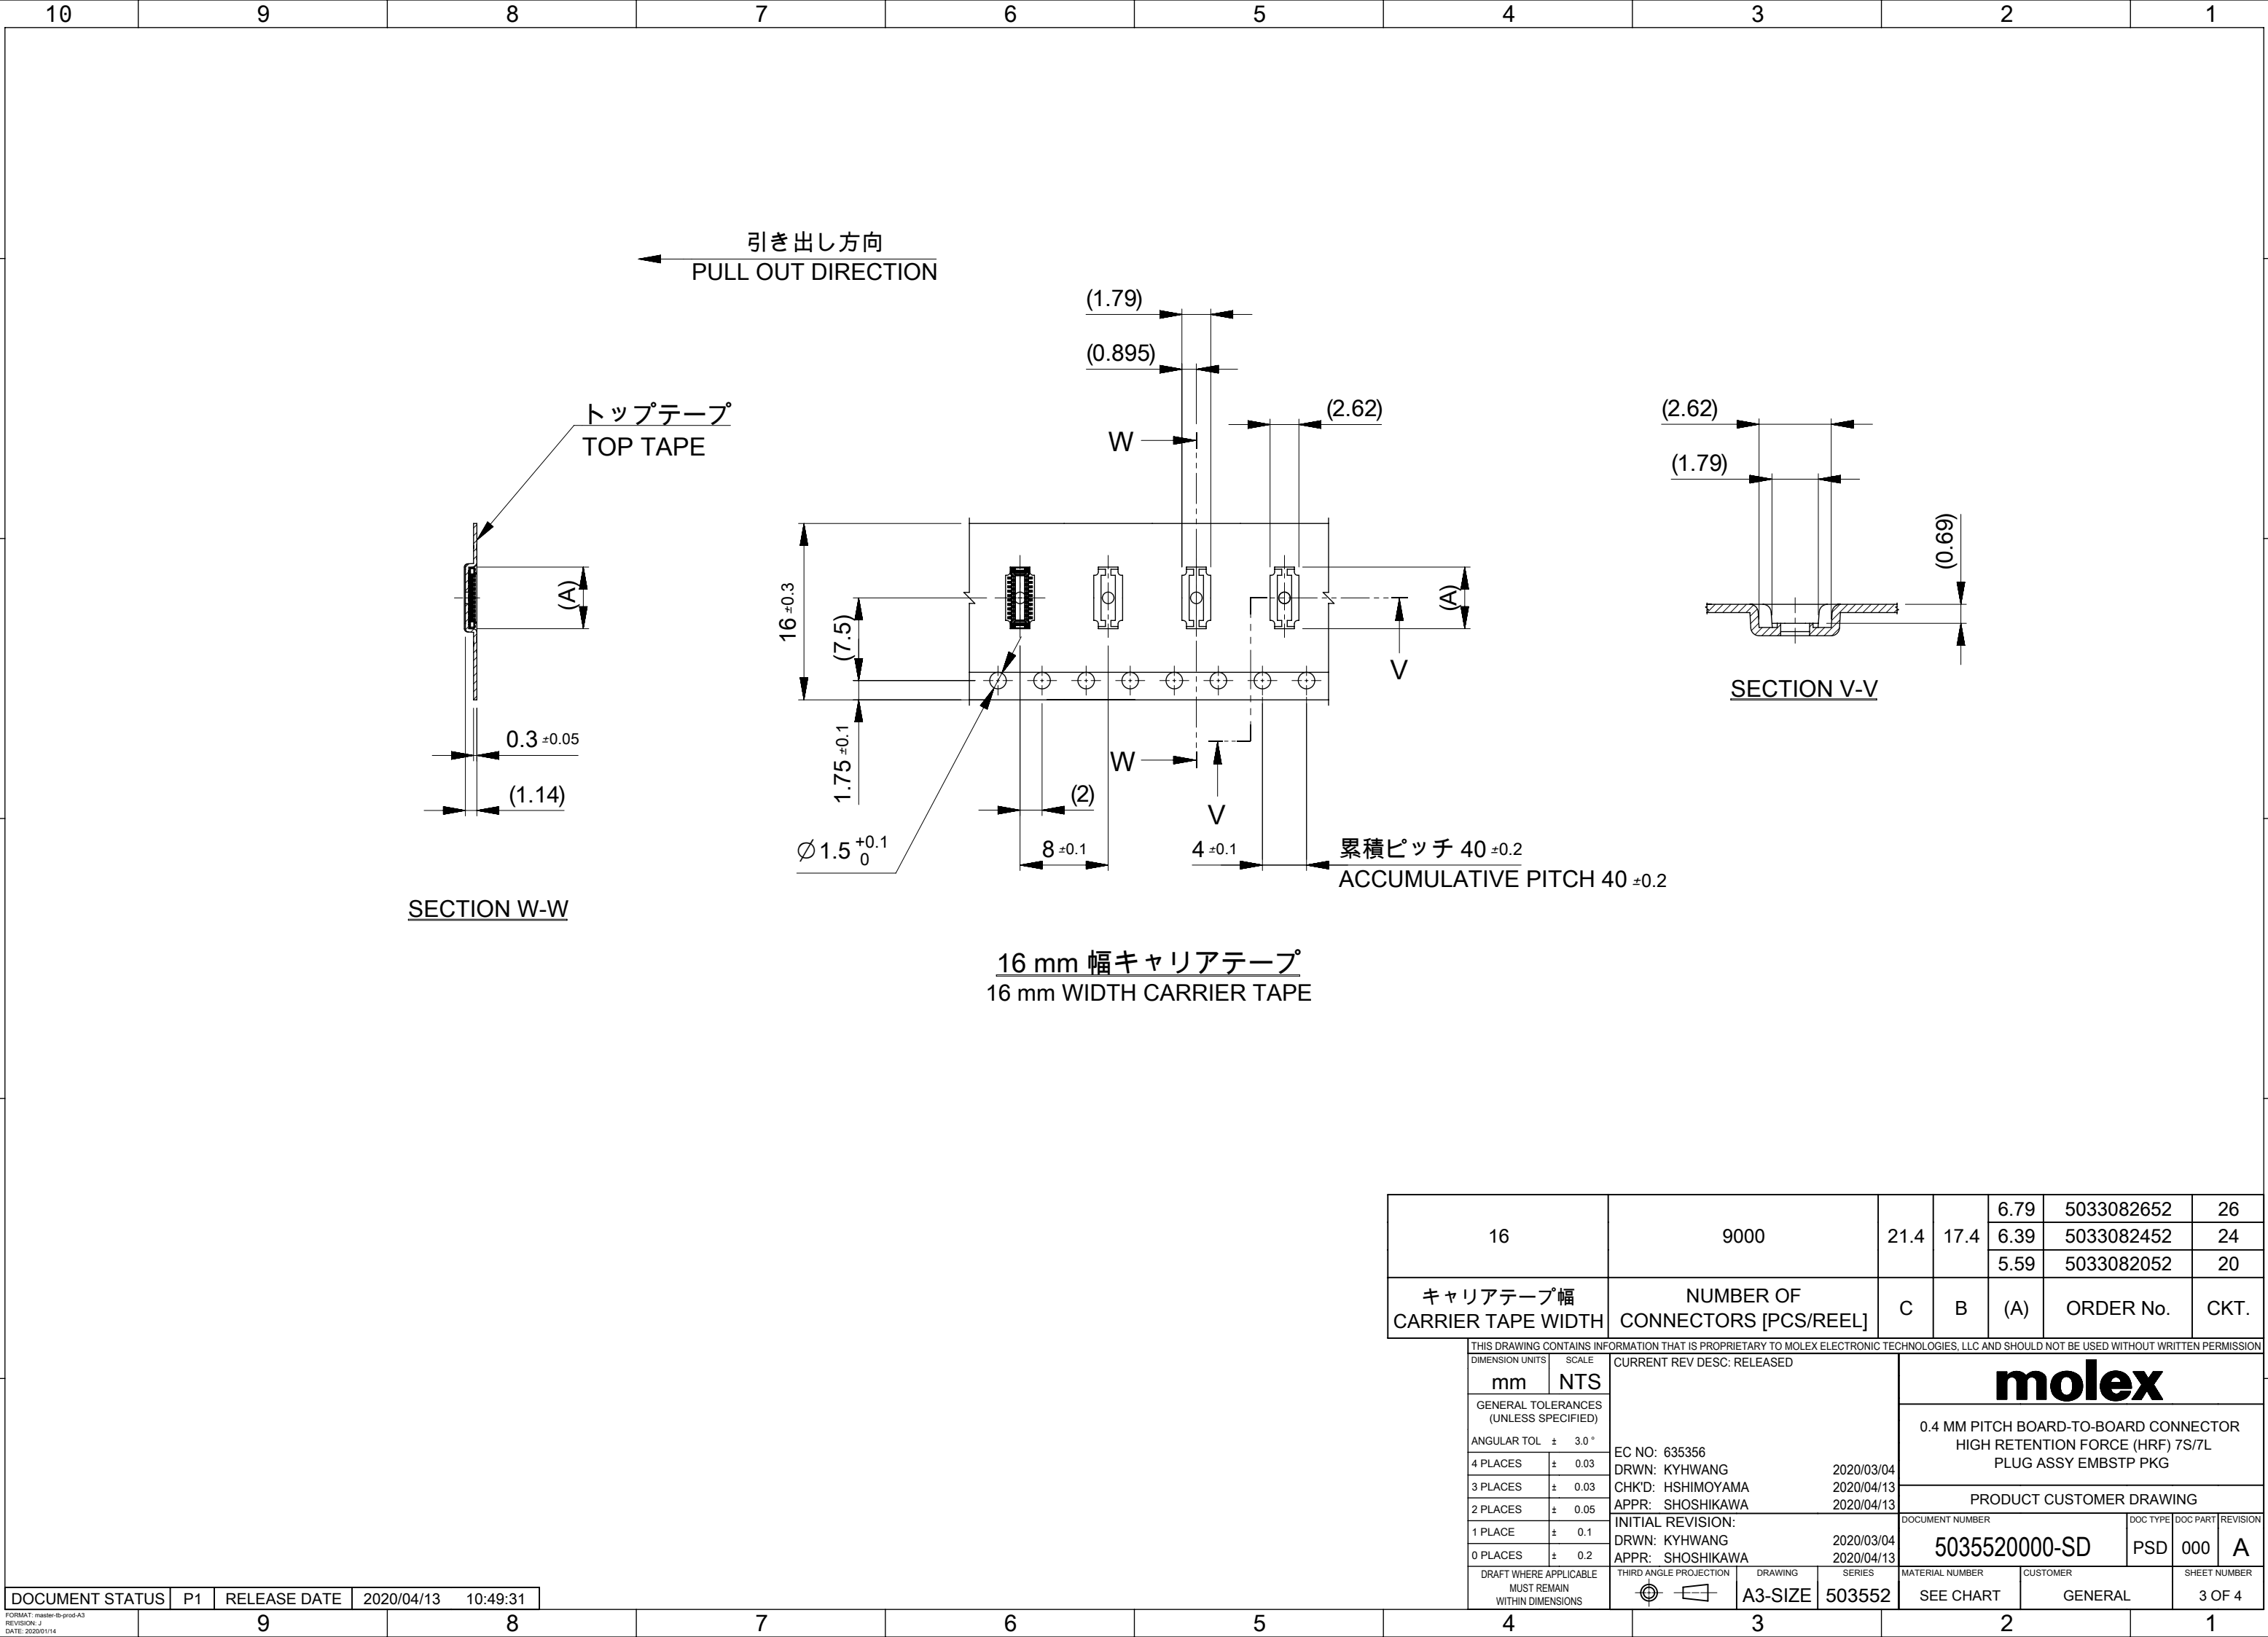

16	9000	21.4	17.4	6.79	5033082652	26
				6.39	5033082452	24
				5.59	5033082052	20
キャリアテープ幅 CARRIER TAPE WIDTH	NUMBER OF CONNECTORS [PCS/REEL]	C	B	(A)	ORDER No.	CKT.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
DIMENSION UNITS		SCALE		CURRENT REV DESC: RELEASED			molex						
mm		NTS											
GENERAL TOLERANCES (UNLESS SPECIFIED)				0.4 MM PITCH BOARD-TO-BOARD CONNECTOR HIGH RETENTION FORCE (HRF) 7S/7L PLUG ASSY EMBSTP PKG									
ANGULAR TOL ± 3.0 °													
4 PLACES		± 0.03		EC NO: 635356 DRWN: KYHWANG 2020/03/04 CHK'D: HSHIMOYAMA 2020/04/13 APPR: SHOSHIKAWA 2020/04/13									
3 PLACES		± 0.03											
2 PLACES		± 0.05											
1 PLACE		± 0.1		PRODUCT CUSTOMER DRAWING									
0 PLACES		± 0.2											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				INITIAL REVISION:			DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION		
				DRWN: KYHWANG 2020/03/04 APPR: SHOSHIKAWA 2020/04/13			5035520000-SD		PSD	000	A		
THIRD ANGLE PROJECTION				DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
				A3-SIZE		503552		SEE CHART		GENERAL		3 OF 4	

DOCUMENT STATUS	P1	RELEASE DATE	2020/04/13	10:49:31
-----------------	----	--------------	------------	----------



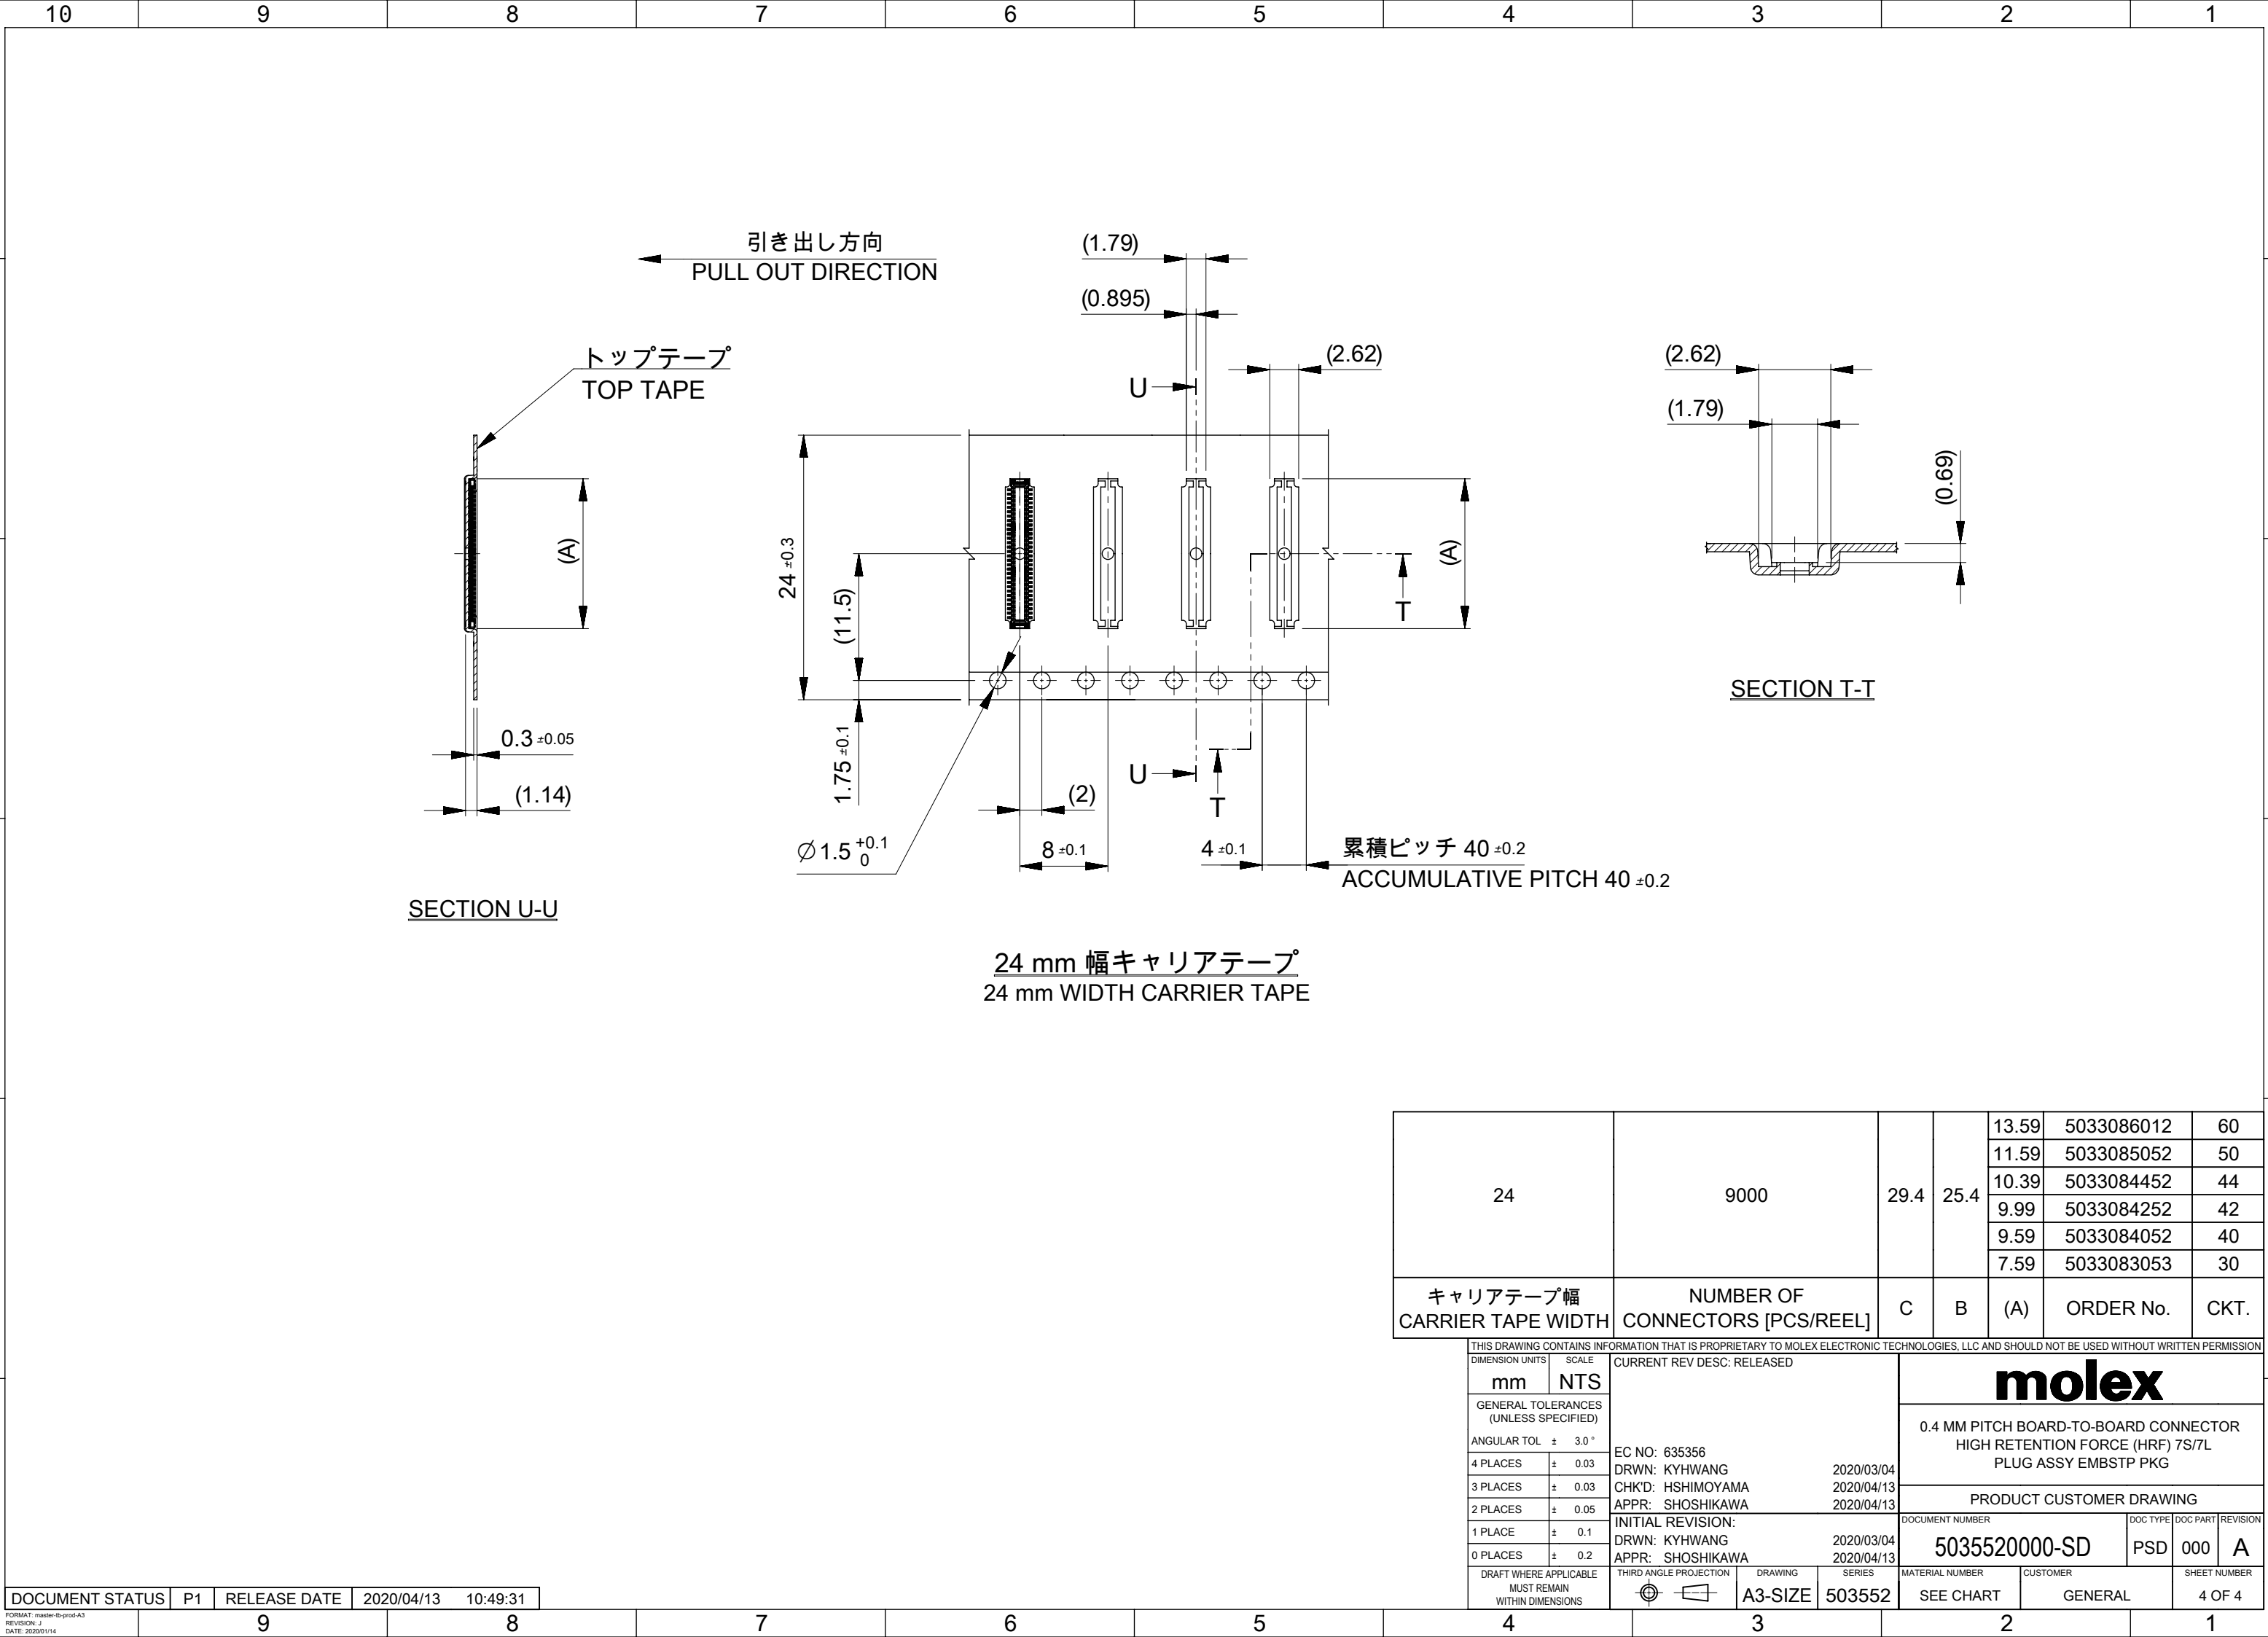


24	9000	29.4	25.4	13.59	5033086012	60
				11.59	5033085052	50
				10.39	5033084452	44
				9.99	5033084252	42
				9.59	5033084052	40
				7.59	5033083053	30
キャリアテープ幅 CARRIER TAPE WIDTH	NUMBER OF CONNECTORS [PCS/REEL]	C	B	(A)	ORDER No.	CKT.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
DIMENSION UNITS		SCALE		CURRENT REV DESC: RELEASED	molex 0.4 MM PITCH BOARD-TO-BOARD CONNECTOR HIGH RETENTION FORCE (HRF) 7S/7L PLUG ASSY EMBSTP PKG						
mm		NTS									
GENERAL TOLERANCES (UNLESS SPECIFIED)											
ANGULAR TOL ± 3.0 °											
4 PLACES		± 0.03			EC NO: 635356 DRWN: KYHWANG 2020/03/04 CHK'D: HSHIMOYAMA 2020/04/13 APPR: SHOSHIKAWA 2020/04/13	PRODUCT CUSTOMER DRAWING					
3 PLACES		± 0.03									
2 PLACES		± 0.05		INITIAL REVISION: DRWN: KYHWANG 2020/03/04 APPR: SHOSHIKAWA 2020/04/13	DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION		
1 PLACE		± 0.1			5035520000-SD		PSD	000	A		
0 PLACES		± 0.2			THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				A3-SIZE		503552		SEE CHART		GENERAL	4 OF 4

DOCUMENT STATUS	P1	RELEASE DATE	2020/04/13	10:49:31
-----------------	----	--------------	------------	----------

503552-**22 6 ~ 18 CKT.

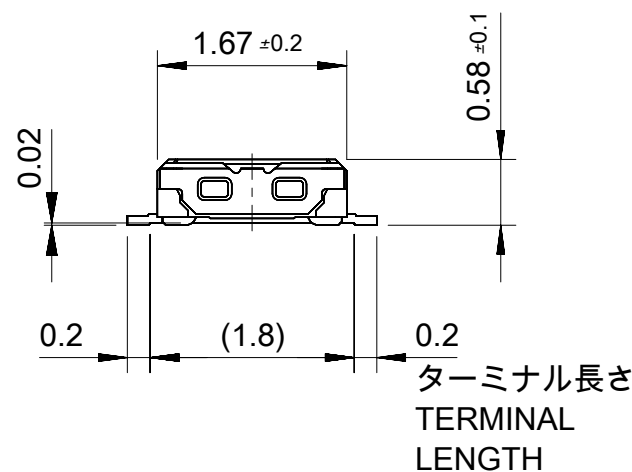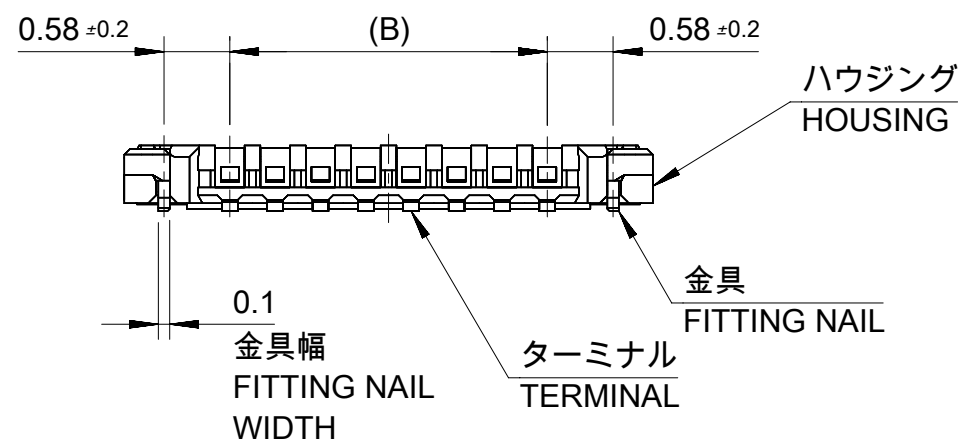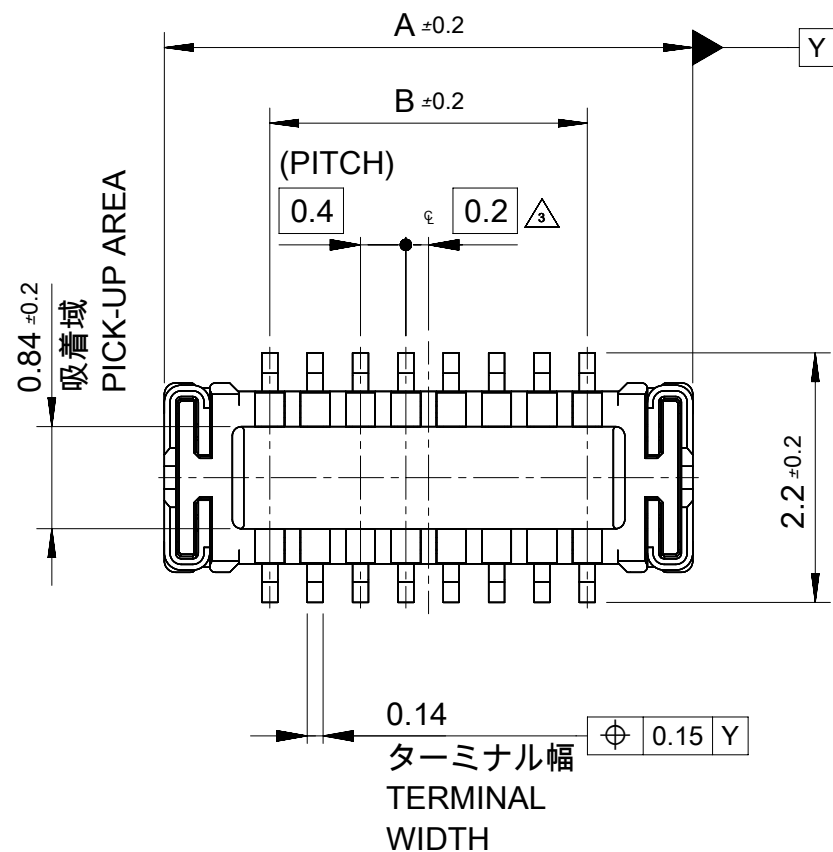

注記 NOTES

1. 使用材料 MATERIAL

ハウジング：液晶ポリマー(LCP) UL94V-0 (黒)
HOUSING：LIQUID CRYSTAL POLYMER, UL94V-0 (COLOR：BLACK)
ターミナル：銅合金
TERMINAL：COPPER ALLOY
金具：銅合金
FITTING NAIL：COPPER ALLOY

2. メッキ仕様 PLATING

ターミナル TERMINAL
コンタクト部：金メッキ (0.1μm以上)
CONTACT AREA：GOLD (0.1μm MINIMUM)
テール部：金メッキ
SOLDER TAIL AREA：GOLD
下地メッキ：ニッケルメッキ (1.0μm以上)
UNDER PLATING：NICKEL (1.0μm MINIMUM)

※ コンタクト部とテール部の基板接触面には金メッキを施しています。
それ以外の個所には金メッキもしくはニッケルメッキが露出し、
外観上、色調が異なる場合がありますが、性能には影響ありません。
但し、コンタクト部とテール部の間にはニッケルメッキで
金メッキを分断している個所があります。
THE CONTACT PART AND SOLDER TAIL SURFACE OF TERMINAL
WHICH CONTACTS PAD OF PWB ARE PLATED WITH GOLD.
THE OTHER SURFACES ARE PLATED WITH GOLD OR NICKEL
UNDERPLATING EXCEPT CUTOFF.
THE GOLD PLATING IS DIVIDED INTO TWO SECTIONS BY NICKEL,
WHICH ARE CONTACT AND SOLDER TAIL PARTS.
IT IS NO PROBLEM IN THE PERFORMANCE ALTHOUGH THOSE
MAY SEEM DIFFERENT COLOR TONE.

金具 FITTING NAIL

金メッキ (テール部のみ)
GOLD (ONLY TAIL PART)
下地メッキ：ニッケルメッキ
UNDER PLATING：NICKEL

△₃ (全極数/2)=偶数の場合に適用。
APPLY FOR (CIRCUIT/2)=EVEN.

4. 嵌合相手：503548シリーズ
MATE WITH：503548 SERIES.
5. テール平坦度は、0.08以下、テール及び金具の平坦度は、0.1以下。
TAIL COPLANARITY TO BE 0.08 MAXIMUM.
TAIL AND FITTING NAIL COPLANARITY TO BE 0.1 MAXIMUM.
6. 本0.4 mm ピッチBOARD-TO-BOARD CONNECTOR HRF 7S/7L シリーズは
503304 / 503308と503548 / 503552シリーズを統合した製品群です
THIS PRODUCT FAMILY, 0.4 MM PITCH BOARD-TO-BOARD CONNECTOR
HRF 7S/7L, IS WHAT 503304 AND 503548 SERIES WERE UNIFIED.

11.6	13.47	5033086012	60
9.6	11.47	5052	50
8.4	10.27	4452	44
8.0	9.87	4252	42
7.6	9.47	4052	40
5.6	7.47	3053	30
4.8	6.67	2652	26
4.4	6.27	2452	24
3.6	5.47	5033082052	20
3.2	5.06	5035521822	18
2.8	4.66	1622	16
2.4	4.26	1422	14
2.0	3.86	1222	12
1.6	3.46	1022	10
0.8	2.66	5035520622	6
B	A	EMBOSSED PACKAGE	極数 CIRCUITS
		オーダー番号 ORDER No.	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
DIMENSION UNITS		SCALE		CURRENT REV DESC: RELEASED			molex 0.4 MM PITCH BOARD-TO-BOARD CONNECTOR HIGH RETENTION FORCE (HRF) 7S/7L PLUG ASSY PRODUCT CUSTOMER DRAWING						
mm		NTS											
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 635356 DRWN: KYHWANG2020/03/04 CHK'D: HSHIMOYAMA2020/04/13 APPR: SHOSHIKAWA2020/04/13 INITIAL REVISION: DRWN: KYHWANG2020/03/04 APPR: SHOSHIKAWA2020/04/13									
ANGULAR TOL ± 3.0 °													
4 PLACES ± 0.03													
3 PLACES ± 0.03													
2 PLACES ± 0.05													
1 PLACES ± 0.1				DOCUMENT NUMBER 5035521000-SD			DOC TYPE PSD	DOC PART 000	REVISION A				
0 PLACES ± 0.2													
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
				A3-SIZE		503552		SEE CHART		GENERAL		1 OF 3	

DOCUMENT NUMBER

5035521000-SD

DOC TYPE

PSD

DOC PART

000




REVISION

A

DOCUMENT STATUS	P1	RELEASE DATE	2020/04/13	10:49:32
-----------------	----	--------------	------------	----------

FORMAT: msa910-10-03A3
REVISION: 1
DATE: 2020/01/11

503308-**52 / -3053 / -6012, 20 ~ 60 CKT.

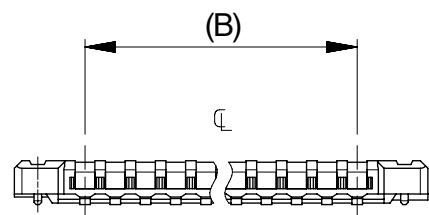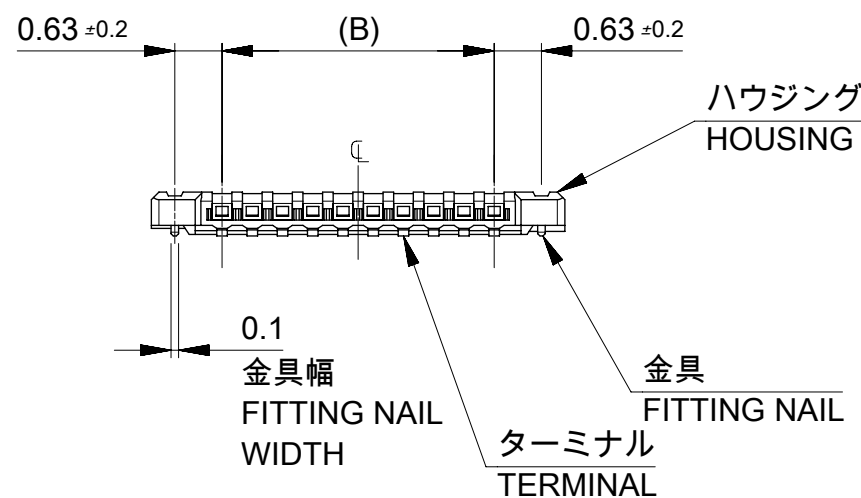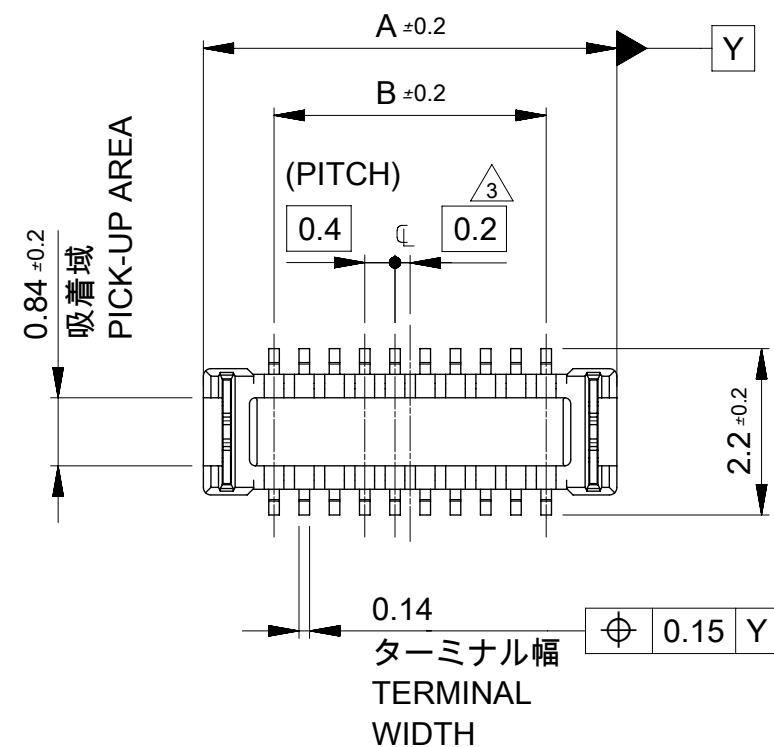

503308-6012 ONLY

注記 NOTES

1. 使用材料 MATERIAL

ハウジング：液晶ポリマー(LCP) UL94V-0 (黒)

HOUSING：LIQUID CRYSTAL POLYMER, UL94V-0 (COLOR：BLACK)

ターミナル：銅合金

TERMINAL：COPPER ALLOY

金具：銅合金

FITTING NAIL：COPPER ALLOY

2. メッキ仕様 PLATING

ターミナル TERMINAL

コンタクト部：金メッキ (0.1μm以上)

CONTACT AREA：GOLD (0.1μm MINIMUM)

テール部：金メッキ

SOLDER TAIL AREA：GOLD

下地メッキ：ニッケルメッキ (1.0μm以上)

UNDER PLATING：NICKEL (1.0μm MINIMUM)

※ コンタクト部とテール部の基板接触面には金メッキを施しています。

それ以外の個所には金メッキもしくはニッケルメッキが露出し、

外観上、色調が異なる場合がありますが、性能には影響ありません。

但し、コンタクト部とテール部の間にはニッケルメッキで

金メッキを分断している個所があります。

THE CONTACT PART AND SOLDER TAIL SURFACE OF TERMINAL

WHICH CONTACTS PAD OF PWB ARE PLATED WITH GOLD.

THE OTHER SURFACES ARE PLATED WITH GOLD OR NICKEL

UNDERPLATING EXCEPT CUTOFF.

THE GOLD PLATING IS DIVIDED INTO TWO SECTIONS BY NICKEL,

WHICH ARE CONTACT AND SOLDER TAIL PARTS.

IT IS NO PROBLEM IN THE PERFORMANCE ALTHOUGH THOSE

MAY SEEM DIFFERENT COLOR TONE.

金具 FITTING NAIL

錫メッキ

TIN PLATING

下地メッキ：ニッケルメッキ

UNDER PLATING：NICKEL

△3 (全極数/2)=偶数の場合に適用。

APPLY FOR (CIRCUIT/2)=EVEN.

4. 嵌合相手：503304シリーズ

MATE WITH：503304 SERIES.

5. テール平坦度は、0.08以下、テール及び金具の平坦度は、0.1以下。

TAIL COPLANARITY TO BE 0.08 MAXIMUM.

TAIL AND FITTING NAIL COPLANARITY TO BE 0.1 MAXIMUM.

6. 本0.4 mm ピッチBOARD-TO-BOARD CONNECTOR HRF 7S/7L

シリーズは503304 / 503308と503548 / 503552シリーズを統合した製品群です

THIS PRODUCT FAMILY, 0.4 MM PITCH BOARD-TO-BOARD CONNECTOR

HRF 7S/7L, IS WHAT 503304 AND 503548 SERIES WERE UNIFIED.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																					
DIMENSION UNITS		SCALE		CURRENT REV DESC: RELEASED				molex													
mm		NTS																			
GENERAL TOLERANCES (UNLESS SPECIFIED)				0.4 MM PITCH BOARD-TO-BOARD CONNECTOR HIGH RETENTION FORCE (HRF) 7S/7L PLUG ASSY																	
ANGULAR TOL ± 3.0 °																					
4 PLACES		± 0.03		EC NO: 635356 DRWN: KYHWANG 2020/03/04 CHK'D: HSHIMOYAMA 2020/04/13 APPR: SHOSHIKAWA 2020/04/13				PRODUCT CUSTOMER DRAWING													
3 PLACES		± 0.03																			
2 PLACES		± 0.05		INITIAL REVISION: DRWN: KYHWANG 2020/03/04 APPR: SHOSHIKAWA 2020/04/13						DOCUMENT NUMBER 5035521000-SD		DOC TYPE PSD		DOC PART 000		REVISION A					
1 PLACE		± 0.1																			
0 PLACES		± 0.2		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						THIRD ANGLE PROJECTION 		DRAWING A3-SIZE		SERIES 503552		MATERIAL NUMBER SEE CHART		CUSTOMER GENERAL		SHEET NUMBER 2 OF 3	

DOCUMENT STATUS	P1	RELEASE DATE	2020/04/13	10:49:32
-----------------	----	--------------	------------	----------

