
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.


LOC	DIST
IN	00

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	REVISED PER ECO-11-011498	06JUN2011	DLD	CJS
	B2	REVISED PER ECO-12-003852	27FEB2012	DLD	CJS
	B3	REVISED PER ECO-13-000026	07JAN2013	DLD	CJS
	B4	REV PER ECN-22-163339	20JUL2022	SMR	CS




1456468-2
KEYING OPTION "B"
SCALE 3:1




1456468-3
KEYING OPTION "C"
SCALE 3:1




1456468-4
KEYING OPTION "D"
SCALE 3:1




SCALE 3:1




SCALE 3:1

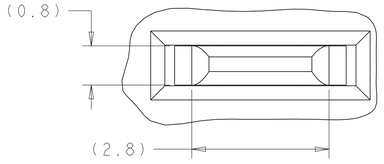


DETAIL H
TYP 4 PLACES
SCALE 16:1




DETAIL K
TYP 4 PLACES
SCALE 16:1

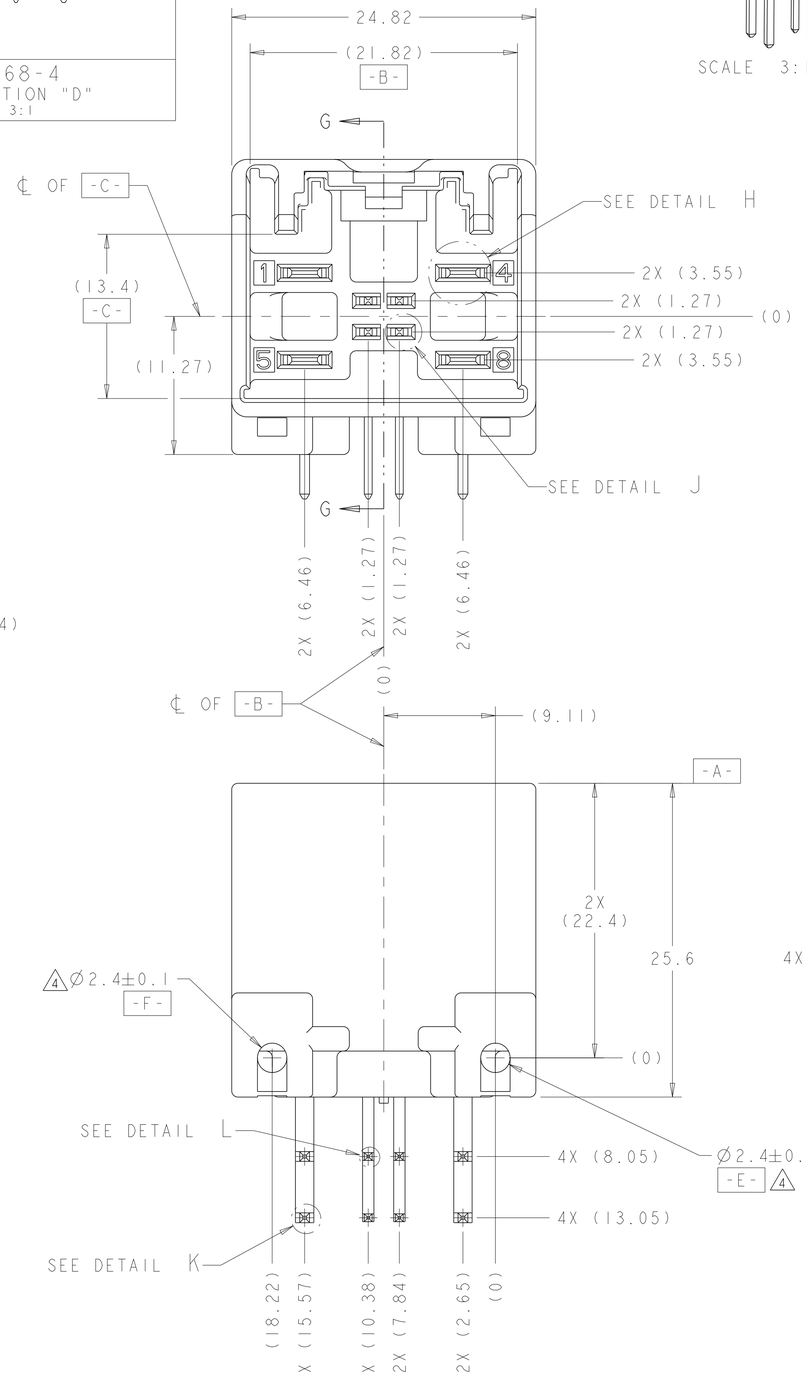


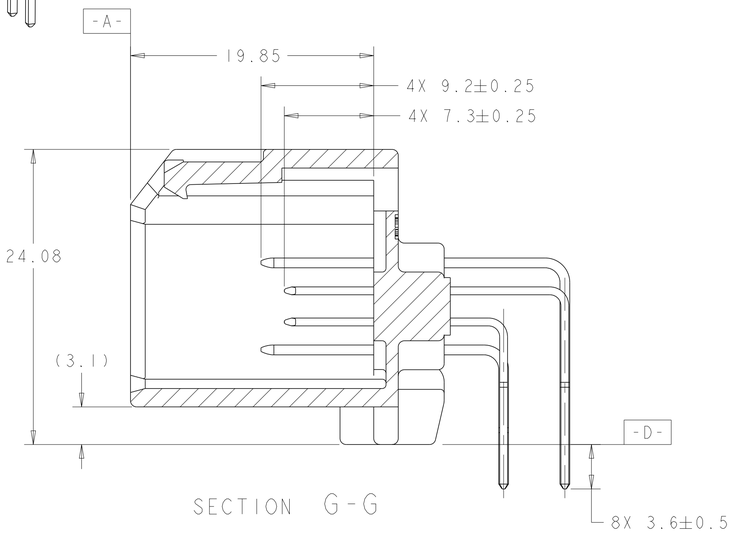


SECTION G-G



DETAIL J
TYP 4 PLACES
SCALE 16:1



DETAIL L
TYP 4 PLACES
SCALE 16:1

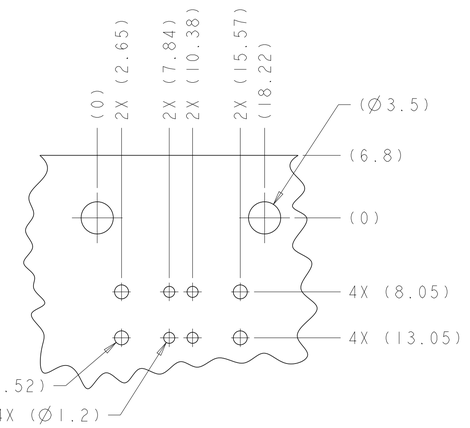

PCB LAYOUT
CONNECTOR SIDE
(RECOMMENDED BOARD THICKNESS 1.57mm)
SCALE : 3:1

1. MATERIAL:
   HOUSING: NYLON 35% GLASS FILLED, COLOR - SEE TABLE
   CONTACTS:
   0.64 PINS: BRASS
   2.8 BLADE: BRASS

2. PLATING:
   0.64 PINS: 2.00µm MIN NICKEL UNDERPLATING ALL OVER
   MATING END: 0.8µm MIN POST PLATED TIN
   SOLDER TAIL: 2.5µm MIN POST PLATED TIN

   2.8 BLADE: 2.00µm MIN NICKEL UNDERPLATING ALL OVER
   MATING END: 0.8µm-1.6µm POST PLATED TIN
   SOLDER TAIL: 3.8µm-6.4µm POST PLATED TIN

3. PART NUMBER 1456468-1. KEYING OPTION "A" SHOWN IN MAIN VIEWS.

4 M3X5 SELF TAPPING SCREW RECOMMENDED FOR BOARD ATTACHMENT.

5. MATING PLUG TE PART NUMBER: 1456471

KEYING OPTION	COLOR	TE PART NUMBER
D	GRAY	1456468-4
C	BLACK	1456468-3
B	GRAY	1456468-2
A	BLACK	1456468-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.3
2 PLC ±0.3
3 PLC ±-
4 PLC ±-
ANGLES ±1°

MATERIAL - SEE NOTES
FINISH - SEE NOTES

DWN M. HITCHCOCK 24AUG2006
CHK A. VASBINDER 24AUG2006
APVD A. VASBINDER 24AUG2006
PRODUCT SPEC 108-2400
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME HEADER ASSEMBLY, 8-WAY UNSEALED HYBRID (4-0.64mm, 4-2.8mm)

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-1456468	

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV B4