


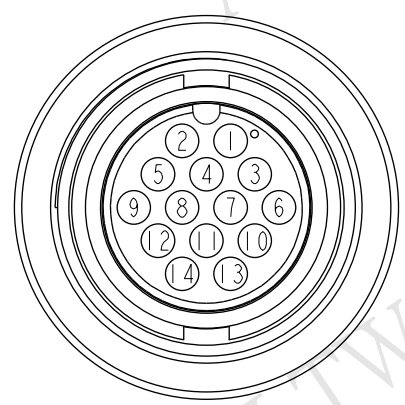


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-9A0159~162	2009/04/17	Li Xiu Zhi	Change SR View & Update Note
C	LEN1490024~027	2014/08/26	Vicky	Update Logo



Conn.

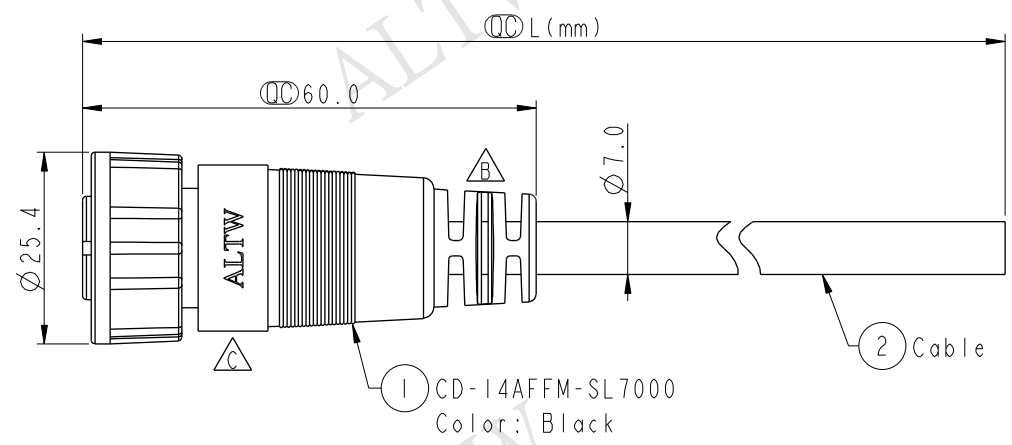

Pin Assignments
Front View

14	Brown/White	棕/白
13	Black/White	黑/白
12	Light Green	淺綠
11	Purple	紫
10	Orange	橘
9	Black	黑
8	Red	紅
7	Pink	粉紅
6	Gray	灰
5	Yellow	黃
4	Green	綠
3	White	白
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
Pin Out		

CD-14AFFM-SL7AXX

XX :01~99Meters
01 :01Meter
02 :02Meters
:
99 :99Meters

Cable Length(L):01~99Meters

Note:

- * $\varnothing$ Important Dimension To Check
- * Waterproof Rate: IP67
- * Housing: Nylon+GF, Black
- * Female Pin: Copper Alloy, Gold Plated
- * Screw Nut: Nylon+GF, Black
- * O-Ring: EPDM, Black
- * Cable: UL2464 24AWG*14C+Drain+Al/My, Black,PVC Jacket,UV Resistant,OD=7.0
- * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm

TOLERANCE ±0.5 mm

TITLE Middle Cable Screw 14Pin F Conn F Pin			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. C	WC-REV. A.1	$\varnothing$ Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DWG NO	CUSTOMER	DRAWN BY	CHECKED BY	APPROVED BY	DATE
	CD-14AFFM-SL7AXX	ALTW	Vicky	Sam	Rita	2014-08-26