
REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN15C0460~465	2015/12/18	Vicky	Update Logo & Note

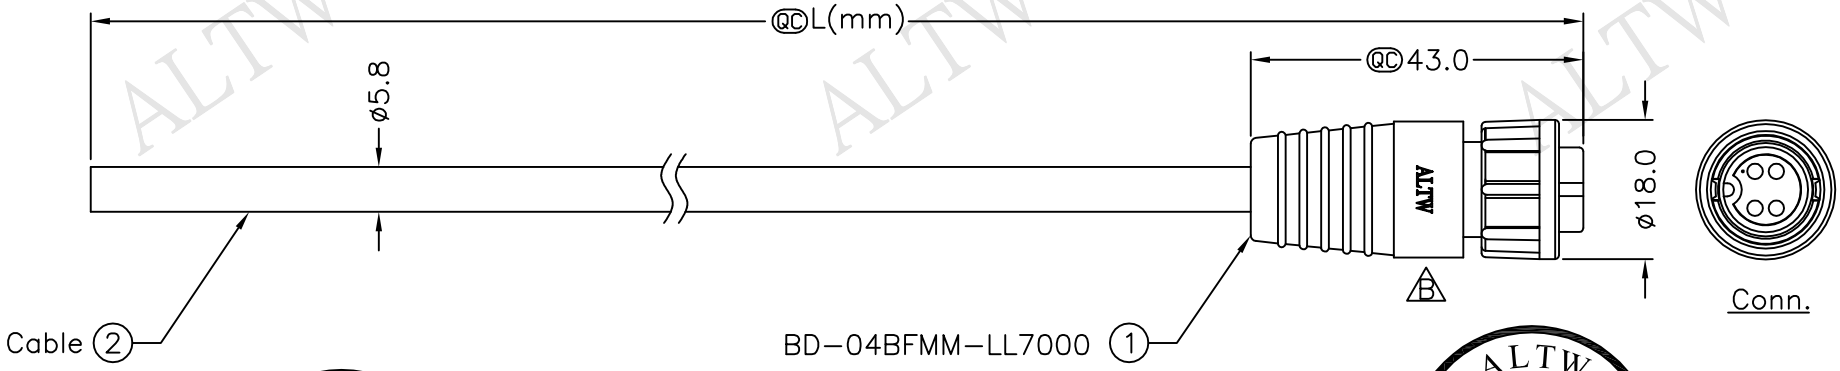

ALTW CONFIDENTIAL 2015.12.18 R&D DEPT.


ALTW DCC. DEPT. CONFIDENTIAL 2015.12.28 ISSUED

BD-04BFMM-LL7AXX

XX:01~99Meter
01:01Meter
02:02Meters
:
:
99:99Meters

Cable Length(L):01~99Meters

Note:
* QC Important Dimension To Check.
* Waterproof Rate: IP67
* Housing: Nylon+GF, Black
* Male Pin: Copper Alloy, Gold Plated
* Cable: UL2464 24AWG*4C+D+Al/My, PVC Jacket, UV Resistant, OD=5.8mm, Black
B * Cable Length Tolerance:01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm



Pin Assignments
Front View

Conn.	Wire Color	Pin Out
4	Yellow 黃	
3	Red 紅	
2	Green 綠	
1	White 白	

UNIT:mm	TITLE: Standard Cable Lock 4Pin F Conn M Pin	Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO:
TOLERANCE: ±0.5 mm	SCALE: Free; SHEET: 1 OF 1		DWG NO: BD-04BFMM-LL7AXX
	REV: B; SIZE: A4; QC :Inspection Item		CUSTOMER: ALTW

DRAWN BY: Vicky	DATE: 2015/12/18	
CHECKED BY: Rita	DATE: 2015/12/18	
APPROVED BY: Lion	DATE: 2015/12/18	

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.