





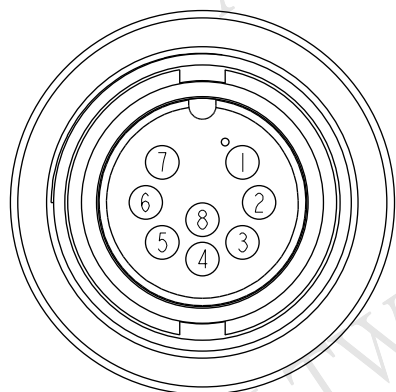

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-9A0065~068	2009/04/15	Li Xiu Zhi	Change SR View & Update Note
C	LEN1480410~413	2014/08/14	Vicky	Update Logo



Conn.

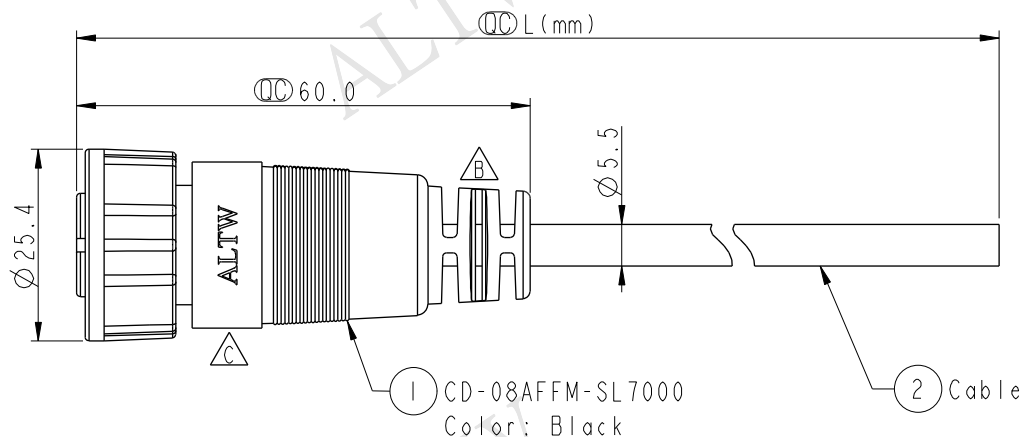

Pin Assignments
Front View

8	Green	綠
7	Yellow	黃
6	Orange	橘
5	Red	紅
4	Blue	藍
3	White	白
2	Brown	棕
1	Black	黑
Conn.	Wire Color	
Pin Out		

CD-08AFFM-SL7AXX

XX :01~99Meters
01 :01Meter
02 :02Meters
:
99 :99Meters

Cable Length(L):01~99Meters

Note:

- * $\varnothing$ Important Dimension To Check
- * Waterproof Rate: IP67
- * Housing: Nylon+GF, Black
- * Female Pin: Copper Alloy, Gold Plated
- * Screw Nut: Nylon+GF, Black
- * O-Ring: EPDM, Black
- * Cable: UL2464 24AWG*8C+Drain+Al/My, Black,PVC Jacket,UV Resistant,OD=5.5
- * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm
TOLERANCE
±0.5 mm

TITLE Middle Cable Screw 8Pin F Conn F Pin			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. C	WC-REV. A.1	$\varnothing$ Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2014-08-14
DWG NO CD-08AFFM-SL7AXX	CHECKED BY Sam	DATE 2014-08-14
CUSTOMER ALTW	APPROVED BY Rita	DATE 2014-08-14

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.