



Terminals & Splices > Automotive Terminals > AMP MCP, RECEPTACLE AND TAB



Terminal Type: **Receptacle**

Mating Tab Width: **4.8 mm, 5.8 mm, 6.3 mm** [.189 in, .228 in, .248 in]

Mating Tab Thickness: **.8 mm** [.031 in]

Terminal Transmits: **25 - 40 A (Power)**

Wire Size: **15 - 13 AWG**

[All AMP MCP, RECEPTACLE AND TAB \(123\)](#)

Features

Product Type Features

Receptacle Style	180°
Sealable	No
Primary Locking Feature	Locking Lance

Contact Features

Contact Size	4.8mm, 6.3mm
Contact Fabrication	Stamped & Formed
Wire Contact Termination Area Plating Material	Tin
Typical Current Rating	26 A
Crimp Type	F-Crimp
Terminal Type	Receptacle
Mating Tab Width	4.8 mm, 5.8 mm, 6.3 mm[.189 in][.228 in][.248 in]
Mating Tab Thickness	.8 mm[.031 in]
Interface Plating	Silver (Ag)

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire



Dimensions

Compatible Insulation Diameter Range	2.2 - 3 mm[.086 - .118 in]
Wire Size	1.5 - 2.5 mm²
Wire Size Search	13 AWG, 14 AWG, 15 AWG

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature (Max)	80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C, 130 °C, 140 °C[176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F][266 °F][284 °F]
Operating Temperature Range	-40 - 140 °C[-40 - 284 °F]

Operation/Application

Conforms to KOMAX Automatic Component Insertion Guideline	Yes, per Version 5.0 (March 2018)
Compatible With Wire Base Material	Copper

Industry Standards

Compatible With Agency/Standards Products	LV214
---	-------

Packaging Features

Packaging Quantity	2000
Packaging Method	Reel

Other

Terminal Transmits	25 - 40 A (Power)
--------------------	-------------------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free




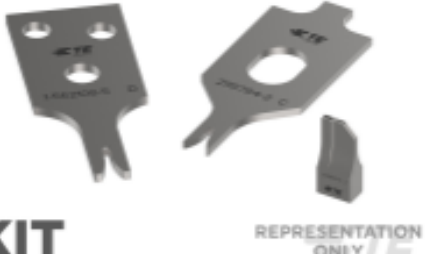
Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 <p>TE Part # CAT-H3399-CH8172 Heavy Duty Sealed Connector Series Housings</p>	 <p>TE Part # 1-1579007-3 EXTRACTION TOOL</p>	 <p>TE Part # CAT-AM705-CH8173 AMP MCP Unsealed Connector Housings</p>	 <p>TE Part # 1-963735-2 TAB 5.8x0.8 CONTACT CS SRC Ag</p>
 <p>TE Part # 1394511-1 EINZELLEITDICHTG,WS</p>	 <p>TE Part # 1823111-1 SINGLE WIRE SEAL, FOR WIRE 2.5 SQMM, BN</p>	 <p>TE Part # 2151059-1 OCEAN_2.0_APPLICATOR-S-110F140OV-RSM</p>	 <p>TE Part # 2151059-2 OCEAN_2.0_APPLICATOR-S-110F140OV-RSA</p>
 <p>TE Part # 2305570-1 Strip Terminal Cutter-Side Feed-No Crimp</p>	 <p>TE Part # 2836684-1 APPLICATOR TO MAKE LOOSE PIECE-RSM</p>	 <p>TE Part # 7-2151059-7 OCEAN_2.0_SPARE_PART_KIT-110F140OV</p>	 <p>TE Part # 7-2836684-7 TOOLING KIT TO MAKE LOOSE PIECE TERMINAL</p>



TE Part # CAT-M9194-CH8172
MULTILOCK, CONNECTOR HOUSING

TE Part # 2394300-1
EXTRACTION TOOL

TE Part # 2836684-2
APPLICATOR TO MAKE LOOSE
PIECE TERMINAL

Also in the Series | AMP MCP Connector System

Automotive Connector Caps & Covers
(23)

Automotive Connector Locks &
Position Assurance(6)

Automotive Housings(329)

Automotive Terminals(129)

Connector Seals & Cavity Plugs(7)

Insertion & Extraction Tools(13)

Other Automotive Connector
Accessories(2)

PCB Headers & Receptacles(28)

Customers Also Bought

TE Part # 1534579-1
16POS MQS REC COD A

TE Part # 880646-6
POSITIVE LOCK REC.

TE Part # 9-1418506-2
MCP6,3 RECEPTACLE HOUSING 2POS

TE Part # 1241406-3
AMP MCP 6.3/4.8K, CONTACT

TE Part # 282374-1
070 MULTILOK RCPT CONT.

TE Part # 4-1718353-2
2 POS TAB HSG 5.8x0.8MM

TE Part # 1534184-1
MCP COVER ASSY32P

TE Part # 626094-2
FF .250 REC 0.5 /1.0 MM2 0.32X19.3
TPBR



Documents

Product Drawings

AMP MCP 6.3/4.8K, CONTACT

English

AMP MCP 6.3/4.8K, CONTACT

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1241404-3_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1241404-3_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1241404-3_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Engineering Specification

English

Engineering Specification

English