

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-9A0215~218	2009/04/14	Li Xiu Zhi	Change SR View & Update Note
C	LEN1480024~027	2014/07/25	Vicky	Update Logo

ALTW

ALTW

ALTW

ALTW



ALTW

ALTW

ALTW


ALTW

ALTW

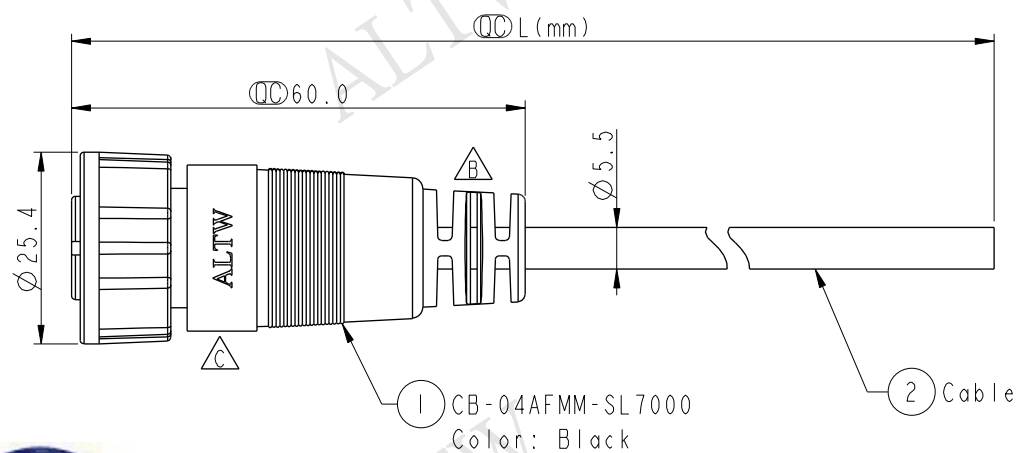

CB-04AFMM-SL7AXX
XX : 01~99Meters
01 : 01Meter
02 : 02Meters
:
99 : 99Meters
Cable Length(L): 01~99Meters

- Note:
- * $\varnothing$ Important Dimension To Check
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black
 - * Male Pin: Copper Alloy, Gold Plated
 - * Screw Nut: Nylon+GF, Black
 - * O-Ring: EPDM, Black
 - * Cable: UL2464 20AWG*4C+Drain+Al/My, Black, PVC Jacket, UV Resistant, OD=5.5
 - * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

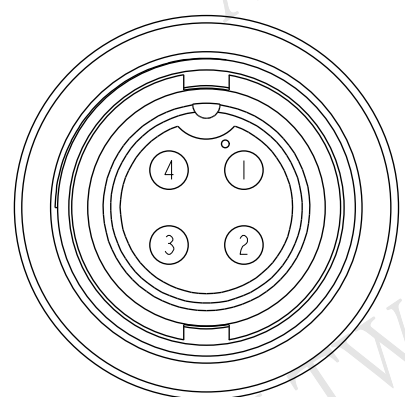

Pin Assignments
Front View

4	White	白
3	Black	黑
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
Pin Out		

UNIT:mm		TITLE
TOLERANCE	±0.5 mm	Middle Cable Screw 4Pin F Conn M Pin
SCALE	1:1	SIZE A4
REV.	C	WC-REV. A.1
SHEET 1 OF 1		
QC: Inspection item		

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DWG NO	CUSTOMER	DRAWN BY	CHECKED BY	APPROVED BY	DATE
	CB-04AFMM-SL7AXX	ALTW	Vicky	Sam	Rita	2014-07-25
						2014-07-25
						2014-07-25