
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-.-
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION ALL RIGHTS RESERVED.

LOC	DIST
—	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	O	CONVERTED RADIALL DWG TO TYCO ACAD DWG	03/04	—	—

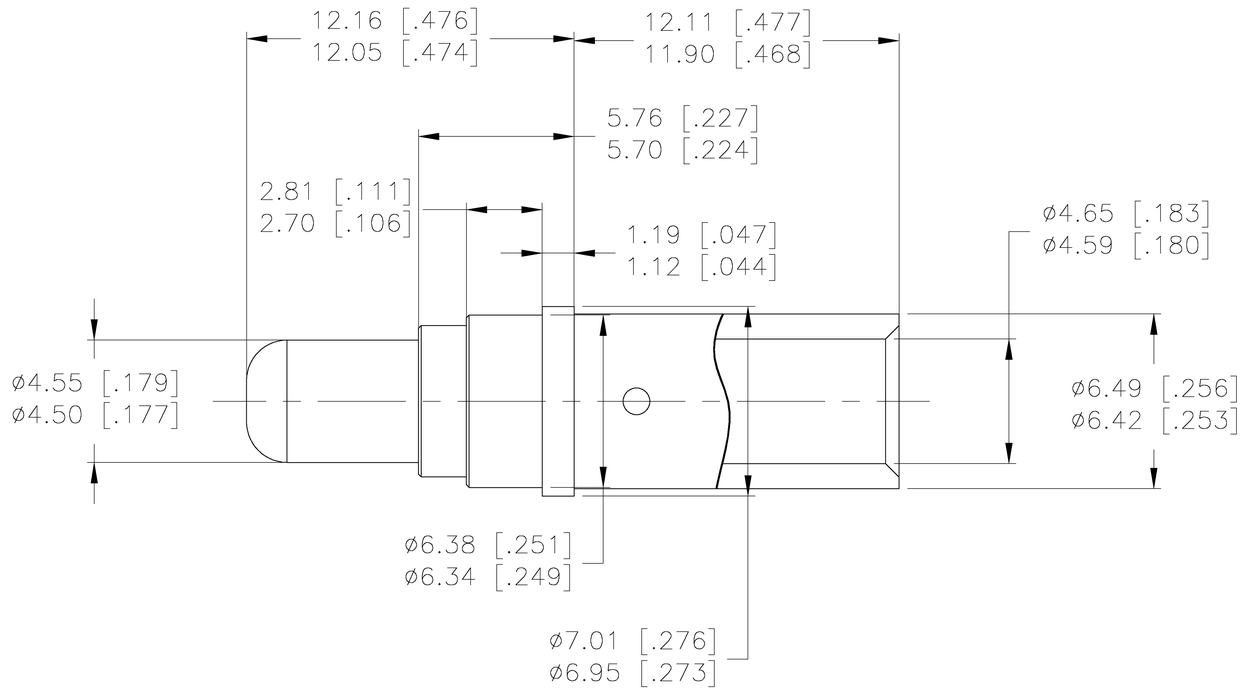

1. COPPER ALLOY PER ASTM B301

2. 1.27 µm [50 µin] MIN GOLD PER ASTM B488 OVER 2.54 µm [100 µin] MIN NICKEL PER QQ-N-290 ON ENTIRE STOCK.

3. APPLICATION TOOLING:
   CRIMPING TOOL: M22520/23-01
   DIE SET: M22520/23-02
   LOCATOR: TYCO P/N 1738331-1
   EXTRACTION TOOL: M81969/28-01

4. WIRE ACCOMMODATED: 8 AWG
   STRIP LENGTH: 9.60 [.378] - 10.10 [.398]

5. THIS PRODUCT IS SOLD BY TYCO ELECTRONICS UNDER A LICENSE FROM RADIALL SA

PRELIMINARY
NOT RELEASED FOR PRODUCTION

Tyco PN - 1738019-1

DIMENSIONS : mm [inch]

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]
TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± —
1 PLC ± —
2 PLC ± 0.05 [.002]
3 PLC ± —
4 PLC ± —
ANGLES ± —

MATERIAL: 1
FINISH: 2

DWN: 25MAR2004
CHK: —
APVD: —
PRODUCT SPEC: —
APPLICATION SPEC: —
WEIGHT: —
CUSTOMER DRAWING

Tyco Electronics Corporation
Harrisburg, Pa 17105-3608

TITLE: POWER CONTACT, PIN, CRIMP TERMINATION
SIZE 5
GPR

PRELIMINARY

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A0	00779	C-1738019	—

SCALE 1:1 SHEET 1 OF 1 REV O