
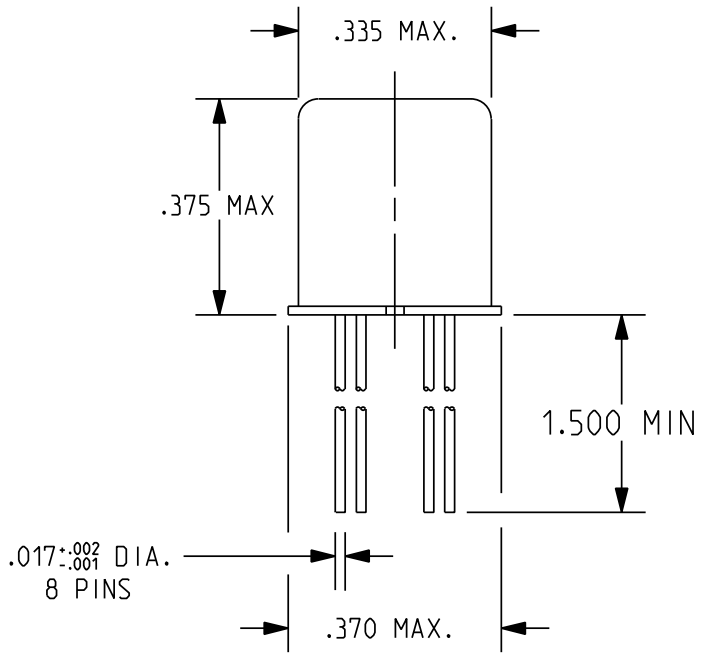


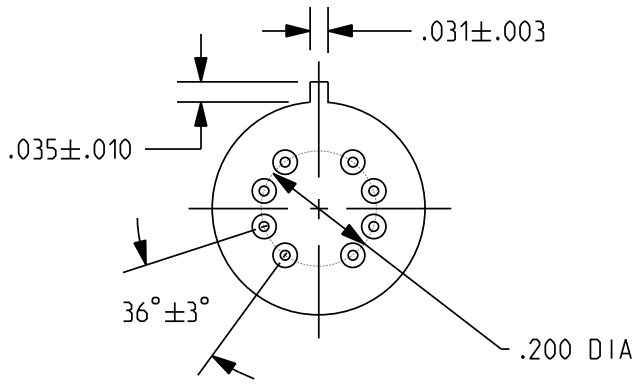

REV. 0
DCO 144005

COIL: @ 25°C

RESISTANCE	3300 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	15.2 VDC
MUST RELEASE	10.8 VDC MAX. 1.7 VDC MIN.

ENVIRONMENT:


VIBRATION 10 Hz TO 3000 Hz @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX.
RELEASE TIME 7.5 MS MAX.
CONTACT STABILIZATION TIME 2.0 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 16FEB2005 | CK. JERRY C. 2/17/05

CII Technologies™
advanced control electronic solutions

CUST. QPL
CUST. NO. M39016/21-012P REV.

"JMSDD" RELAY

JMSWDD-26XP